




湖南腾远智能设备有限公司
TENYUM Intelligent Equipment Co., Ltd.

Innovation leads development • Technology wins future

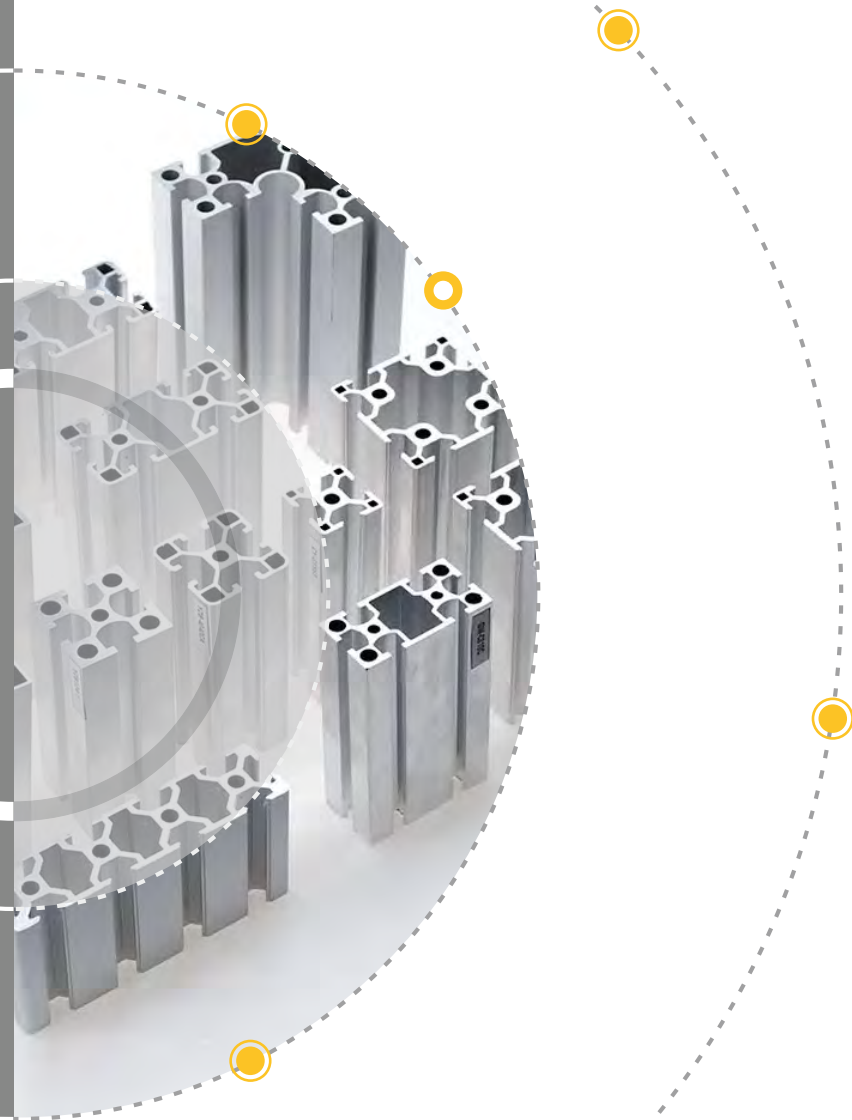

FA 自动化配件
工业设备铝型材
机械零件精密加工

TENYUM



TENYUM Intelligent Equipment Co., Ltd.
Add.: Longping high-tech park, Changsha, Hunan, China
Tel.: 0731-84877386
Web.: www.tenyum.com

TENYUM Aluminum - Empowering a better life

公司简介

COMPANY PROFILE

腾远铝业是一家专业生产工业应用套件系统的铝型材厂家,自2011年以来,一直致力于设计、生产和销售机械防护栏、铝型材工作站和工厂施工的自动化解决方案和精益生产应用。

随着公司的发展,我们能为客户提供工业铝型材及配套连接件、异型材开模设计、铝型材精密加工、铝制品表面处理、工业铝框架组装、机械防护围栏、工厂自动化生产流水线设计、制作、安装等一站式服务。腾远铝业具有丰富的设计、生产经验,熟悉国内外市场需求,结合国际工业铝型材设计理念与中国本土铝型材及配套连接件低成本优势,能满足客户特殊要求的个性产品和异型材产品的定制需求。产品广泛应用于自动化设备制造、医疗器械、智能仓储、航空航天、汽车制造、3C电子等领域。产品远销欧洲、中东、南美、北美、大洋洲、东南亚等国际市场。


腾远人本着“以质量为保证,以服务为宗旨”的经营理念,坚持“注重品质,赢在细节”的质量方针,以不断进取的精神,竭诚为广大用户提供优良的产品和周到的服务。



TENYUM ALUMINUM is the professional manufacturer in kit systems for industrial applications. It has been designing, manufacturing and marketing construction solutions for automation machinery, work station and plants since 2011. Today, TENYUM ALUMINUM provide a full range service of design, manufacturing and installation of "one-stop" shop for industrial aluminum profiles and accessories, design mold for profiled extrusion, deep machining, surface treatment, assembly for use in machine frame, safety fences, automation solutions and lean production applications. Tenyum Aluminum is familiar with the needs of domestic and foreign markets, and combines the design concept of international industrial aluminum profiles with the low-cost advantages of Chinese local aluminum profiles and accessories to meet the special requirements of



customers for personalized products and custom-made special-profile products. Our products are widely used in automation manufacturing, medical equipment, intelligent warehousing, aerospace, automobile manufacturing, 3C electronics and other fields. Products are exported to Europe, the Middle East, South America, North America, Oceania, Southeast Asia and other international markets. Based on the business philosophy of "quality as the guarantee, service as the purpose", TENYUM people adhere to the quality policy of "focusing on quality and winning in details", and with the spirit of continuous improvement to provide customers with excellent products and services.

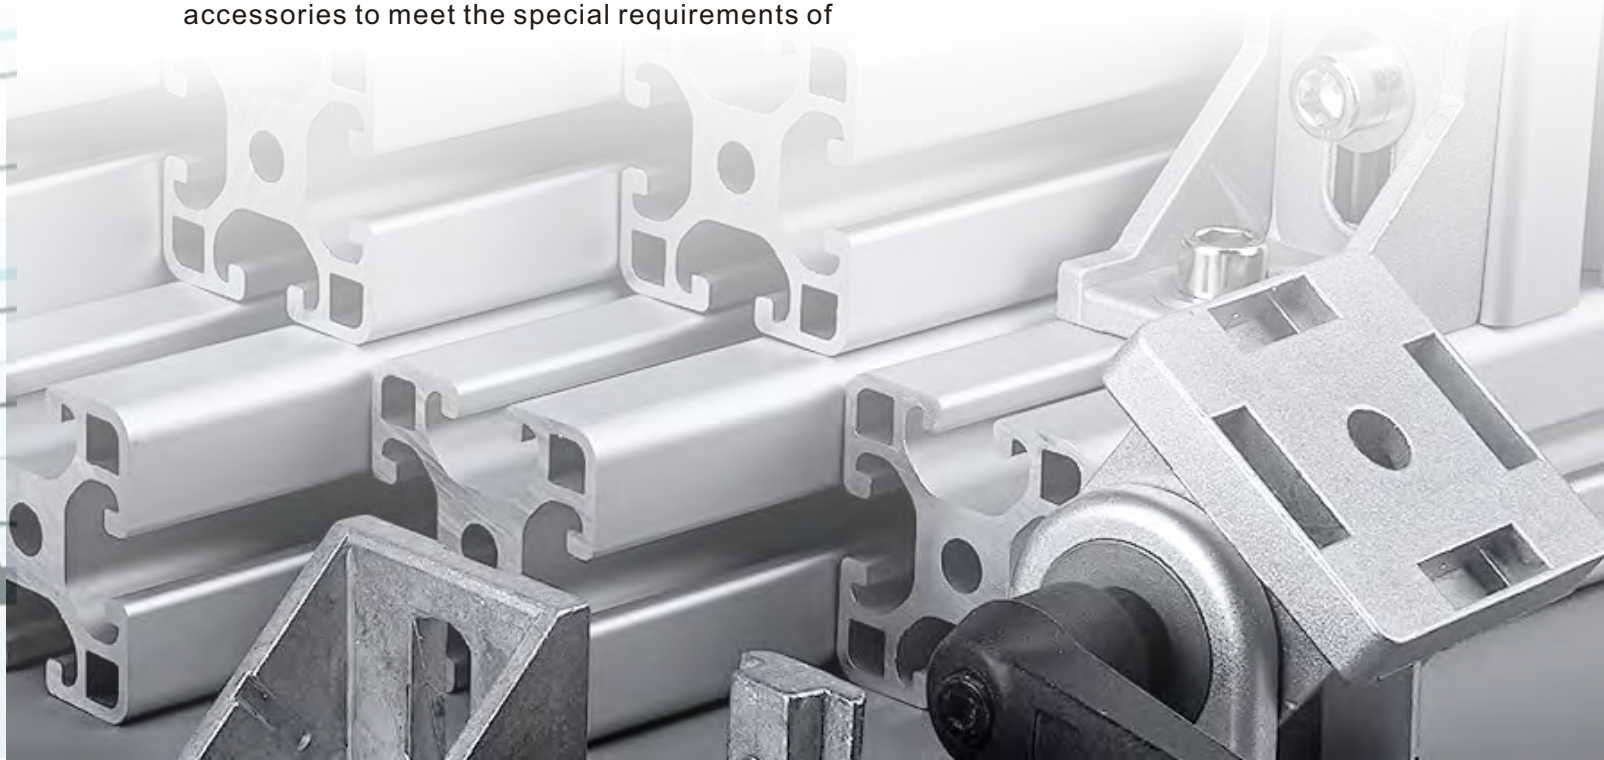

PRODUCT RANGE

产品范围



Product Range

TENYUM is a manufacturer, designer, and installer of aluminum extrusion and accessories, cuts the aluminum extrusion to length and performs all necessary secondary operations such as cnc machining and surface treatment and assembly.

工业铝型材 >>>

铝型材配件 >>>

铝型材加工 >>>

铝型材定制 >>>

铝型材应用 >>>


01 Aluminum Profile

TENYUM provide both light profile such as 20 series to heavy profile such as 120 series, the customers can choose the profiles according to the different requirements of your products for load-bearing.



02 Accessories

TENYUM provide various of accessories for the profiles, suitable for the assembly of frame structure system, to achieve a variety of fastening and connection.

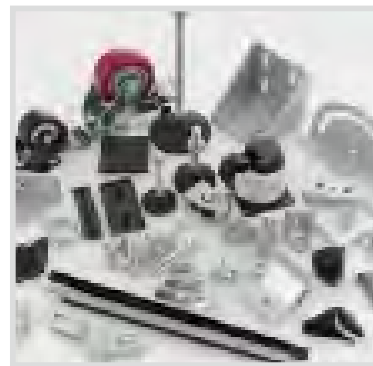

03 Deep machining

TENYUM has a number of CNC machine, lathes, punches, welding and CNC cutting machines , and has a professional technical team to provide design and machining service according to customers requirement.



04 Custom aluminum parts

TENYUM has many years of design experience, provide OEM service according to customer requirements, with a number of production line,strictly control the product quality.



05 Application for profile

TENYUM provide a completely custom solution every time. No matter your needs, our team is here to help you through the process of designing and building your next projects, from help with concept and design to the final assembly, we can help as much as you want.



铝型材多元化应用案例 Aluminum profile diversified application case

Safety guarding / fence

Safety guarding also know as safety fence, is a barrier used to keep personnel clear of an area for safety, security, privacy, or to simply keep the work area looking clean and organize.

With the TENYUM Aluminum Profile, you can build just about anything you can imagine. No matter your needs, our team is here to help you through the process of designing and building your next custom perimeter guard or safety fencing system.



Conveyor line

TENYUM is built for lean solutions, we can provide a custom conveyor system that meets your needs and keeps your business moving.

TENYUM will work in partnership with the customer the develop a conveyor to meet their exacting needs, from modified standard designs to truly one-of-a-kind custom conveyors, TENYUM has the solution for you.



Industrial stairway & Platform

Stairway and Platform System is commonly used for overpass bridges over machinery and equipment. The assembly can be realized easily by simply fastening screws without any machine work.

TENYUM offer a huge variety of custom stairway and custom platforms designed for specific uses in an industrial environment.



Machine frame & enclosure

Designed around a machine or a machine's point of operation to protect the operator and dustproof.

Due to the need for custom solutions, we manufacture frame and enclosures made from aluminum profile, to provide a completely custom solution every time. Our team will work closely with you to design the right safety enclosure to meet your custom guarding needs to help better protect your employees and machines.



Work Bench

Custom designs based on weight, space, and dimensional requirement.


Our workbenches are made of sturdy, dependable aluminum extrusion that can be modified to meet your specific needs. With a variety of t-slot profiles and fastening methods, you can mix and match based on weight-bearing needs, space capacity, and custom dimensional requirement. Our team is here to help you through every step of the process. From help with concept and design to the final assembly, we can help as much as you want.














DIY Solutions


















Aluminum extrusion are modular, sturdy, and customizable. Aluminum extrusions have surpassed welded steel structures as the way to build frame in almost every industry worldwide.

No matter your needs, our team is here to help you through the process of designing and building your next custom requirements.










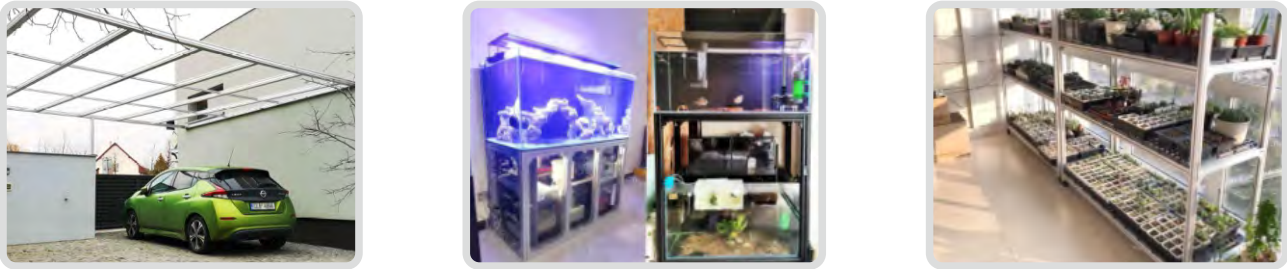







铝合金型材产品总览 Aluminum Profile Products Overview

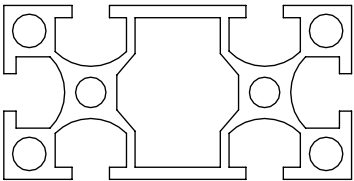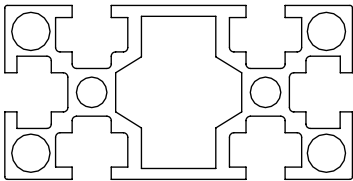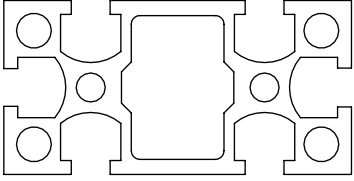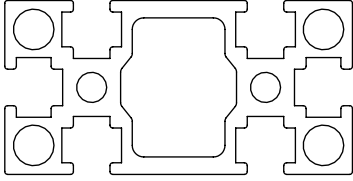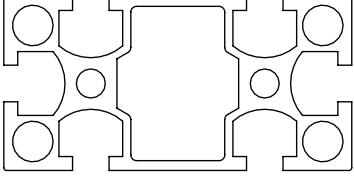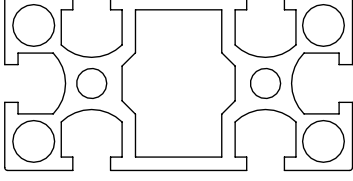Type	series	Slot width	Page	Modular dimension Modular	
National Standard	20 series	4.5			
				TY-4-2020	
	30 series	6.5			
				TY-4-2040	TY-4-2040-2
					
				TY-6-3030	TY-6-3030-2
National Standard	30 series	6.5			
				TY-6-3030-3	TY-6-3030-4
	40 series	8.4			
				TY-6-3060	TY-6-3060-2
					
				TY-6-3060-3	TY-6-3060-4

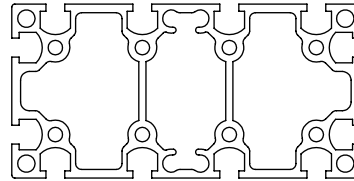












Type	series	Slot width	Page	Modular dimension Modular	
National Standard	30 series	6.5			
				TY-6-6060	TY-6-6060-2
	40 series	8.4			
				TY-6-60120	
					
				TY-8-4040	TY-8-4040-2
National Standard	40 series	8.4			
				TY-8-4040-3	TY-8-4040-4
	40 series	8.4			
				TY-8-4040-5	TY-8-4040-6
					
				TY-8-4040-7	TY-8-4040-8-2N90
National Standard	40 series	8.4			
				TY-8-4040-9-1N	TY-8-4040-10
	40 series	8.4			
				TY-8-4040-11	TY-8-4040-12
					
				TY-8-4080	TY-8-4080-2












铝合金型材产品总览 Aluminum Profile Products Overview

Type	series	Slot width	Page	Modular dimension Modular	
National Standard	40 series	8.4			
				TY-8-4080-3	TY-8-4080-4
					
				TY-8-4080-5	TY-8-4080-6-1N
					
				TY-8-4080-7-3N	TY-8-4080-8
					
				TY-8-4080-9	TY-8-4080-10
					
				TY-8-4080-11	TY-8-4080-12









Type	series	Slot width	Page	Modular dimension Modular		
National Standard	40 series	8.4				
				TY-8-4080-13	TY-8-8080	TY-8-8080-2
	50 series	8.4				
				TY-8-5050	TY-8-50100	






铝合金型材产品总览 Aluminum Profile Products Overview

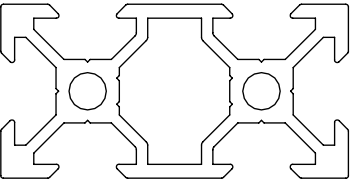Type	Series	Slot width	Page	Modular dimension	
European Standard	20 series	6.5			
				TY-OB-6-2020	TY-OB-6-4040
	8.2				
				TY-OB-8-2040	
European Standard	30 series	8.2			
				TY-OB-8-3030	TY-OB-8-3030-2
European Standard	40 series	8.4			
				TY-OB-8-4040	TY-OB-8-4040-2
European Standard	40 series	8.4			
				TY-OB-8-4040-3	TY-OB-8-4040-5
European Standard	40 series	8.4			
				TY-OB-8-4040-6	TY-OB-8-4040-7
European Standard	40 series	8.4			
				TY-OB-8-4040-8	TY-OB-8-8080

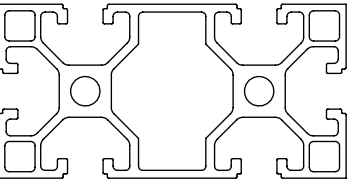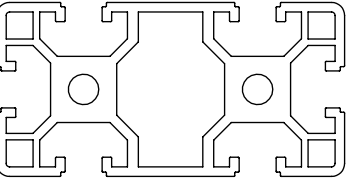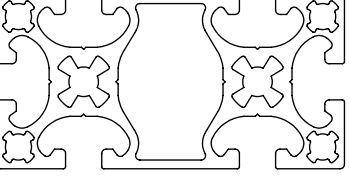Type	Series	Slot width	Page	Modular dimension	
European Standard	40 series	8.4			
				TY-OB-8-8080-2	TY-OB-8-8080-3
	40 series	8.4			
				TY-OB-8-8080-4	TY-OB-8-8080-5
European Standard	40 series	8.4			
				TY-OB-8-4080	TY-OB-8-4080-2
European Standard	40 series	8.4			
				TY-OB-8-4080-3	TY-OB-8-4080-4
European Standard	40 series	8.4			
				TY-OB-8-4080-5	TY-OB-8-4080-6
European Standard	50 series	8.4			
				TY-OB-8-50100	

铝合金型材产品总览 Aluminum Profile Products Overview



TY-YX-01   材质Material: 铝 (Aluminium) 6063-T5 重量Weight:0.95KG/M	TY-YX-02   材质Material: 铝 (Aluminium) 6063-T5 重量Weight:2.58KG/M	TY-YX-03   材质Material: 铝 (Aluminium) 6063-T5 重量Weight:0.46KG/M
TY-YX-04   材质Material: 铝 (Aluminium) 6063-T5 重量Weight:1.34KG/M	TY-YX-05   材质Material: 铝 (Aluminium) 6063-T5 重量Weight:0.17KG/M	TY-YX-06   材质Material: 铝 (Aluminium) 6063-T5 重量Weight:1.22KG/M

TY-YX-07   材质Material: 铝 (Aluminium) 6063-T5 重量Weight:1.75KG/M	TY-YX-08   材质Material: 铝 (Aluminium) 6063-T5 重量Weight:3.08KG/M	TY-YX-09   材质Material: 铝 (Aluminium) 6063-T5 重量Weight:0.63KG/M
TY-YX-10   材质Material: 铝 (Aluminium) 6063-T5 重量Weight:2.35KG/M	TY-YX-11   材质Material: 铝 (Aluminium) 6063-T5 重量Weight:0.55KG/M	TY-YX-12   材质Material: 铝 (Aluminium) 6063-T5 重量Weight:7.84KG/M

TY-20 国标铝型材



TY-20 national standard series aluminum profiles

TY-4-2020





参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	0.37kg/m 6m/ 支
集合惯性 Mass of Inertia	Ix: 0.55cm ⁴ Iy: 0.55cm ⁴
截面惯性 Section Moduius	Zx: 0.27cm ³ Zy: 0.27cm ³

TY-4-2040



参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	0.68kg/m 6m/支
集合惯性 Mass of Inertia	Ix:1.10cm ⁴ Iy:4.28cm ⁴
截面惯性 Section Moduius	Zx: 0.55cm ³ Zy: 2.14cm ³

TY-4-2040-2




参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	0.66kg/m 6m/支
集合惯性 Mass of Inertia	Ix:1.06cm ⁴ Iy:3.90cm ⁴
截面惯性 Section Moduius	Zx: 0.53cm ³ Zy: 1.95cm ³

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

TY-30 国标铝型材


TY-30 national standard series aluminum profiles

TY-6-3030




参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	1.06kg/m 6m/支
集合惯性 Mass of Inertia	Ix:3.54cm ⁴ Iy:3.54cm ⁴
截面惯性 Section Moduius	Zx: 1.77cm ³ Zy: 1.77cm ³

TY-6-3030-2



参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	0.71kg/m 6m/支
集合惯性 Mass of Inertia	Ix:2.12cm ⁴ Iy:2.12cm ⁴
截面惯性 Section Moduius	Zx: 1.06cm ³ Zy: 1.06cm ³

TY-6-3030-3




参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	1.01kg/m 6m/支
集合惯性 Mass of Inertia	Ix:3.15cm ⁴ Iy:3.15cm ⁴
截面惯性 Section Moduius	Zx: 1.52cm ³ Zy: 1.52cm ³

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

TY-30 国标铝型材

TY-30 national standard series aluminum profiles

TY-6-3030-4



		参数 PARAMETER	
		材料	铝 Aluminum(6063)
		Material	喷砂电泳/ 国标银白
		单位质量	1.05kg/m 6m/ 支
		Weight	
		集合惯性	Ix: 3.54cm ⁴ Iy: 3.54cm ⁴
		Mass of Inertia	
		截面惯性	Zx: 1.77cm ³ Zy: 1.77cm ³
		Section Moduius	

TY-6-3060

参数 PARAMETER

材料	铝 Aluminum(6063)
Material	喷砂电泳/ 国标银白
单位质量	1.76kg/m 6m/支
Weight	
集合惯性	Ix:6.38cm ⁴ Iy:24.43cm ⁴
Mass of Inertia	
截面惯性	Zx: 3.19cm ³ Zy: 12.21cm ³
Section Moduius	

TY-6-3060-2

		参数 PARAMETER	
		材料	铝 Aluminum(6063)
		Material	喷砂电泳/ 国标银白
		单位质量	1.79kg/m 6m/支
		Weight	
		集合惯性	Ix:6.21cm ⁴ Iy:24.43cm ⁴
		Mass of Inertia	
		截面惯性	Zx: 3.19cm ³ Zy: 23.12cm ³
		Section Moduius	


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

TY-30 national standard series aluminum profiles


TY-6-3060-3

参数 PARAMETER	
材料	铝 Aluminum(6063)
Material	喷砂电泳/ 国标银白
单位质量	1.46kg/m 6m/支
Weight	
集合惯性	Ix:5.28cm ⁴ Iy:20.99cm ⁴
Mass of Inertia	
截面惯性	Zx: 2.64cm ³ Zy: 10.49cm ³
Section Moduius	

TY-6-3060-4

		参数 PARAMETER			
		材料	铝 Aluminum(6063)		
		Material	喷砂电泳/ 国标银白		
		单位质量	1.65kg/m 6m/支		
		Weight			
		集合惯性	Ix:5.78cm ⁴ Iy:21.44cm ⁴		
				Mass of Inertia	
				截面惯性	Zx: 2.89cm ³ Zy: 1.72cm ³
				Section Moduius	



TY-6-6060

		参数 PARAMETER	
		材料	铝 Aluminum(6063)
		Material	喷砂电泳/ 国标银白
		单位质量	2.75kg/m 6m/支
		Weight	
		集合惯性	Ix:42.82cm ⁴ Iy:42.82cm ⁴
		Mass of Inertia	
		截面惯性	Zx: 21.41cm ³ Zy: 21.41cm ³
		Section Moduius	


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

国标30系列型材配件 GB 30 series profile accessories
附件部分

端盖 Cap Usage:Cover the exposed end of the profile bracket, dustproof, beautiful Material: Plastic Color :black

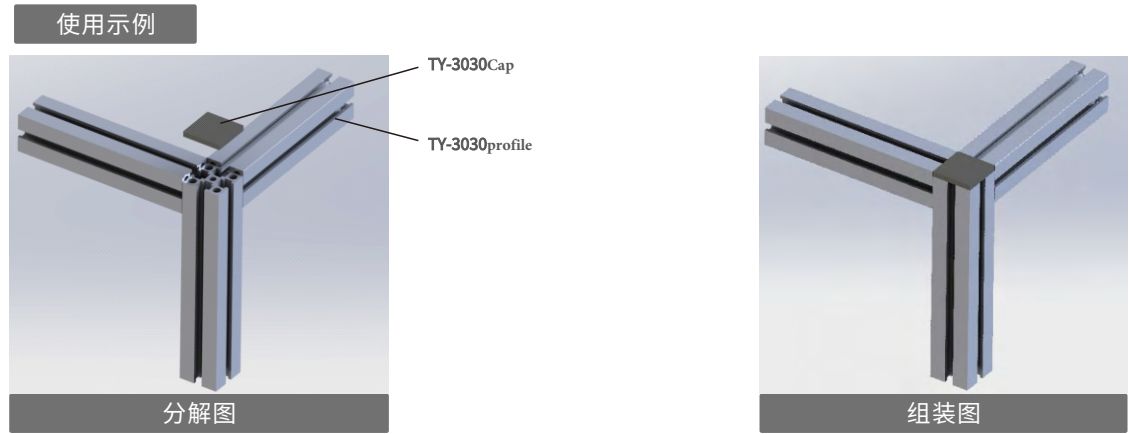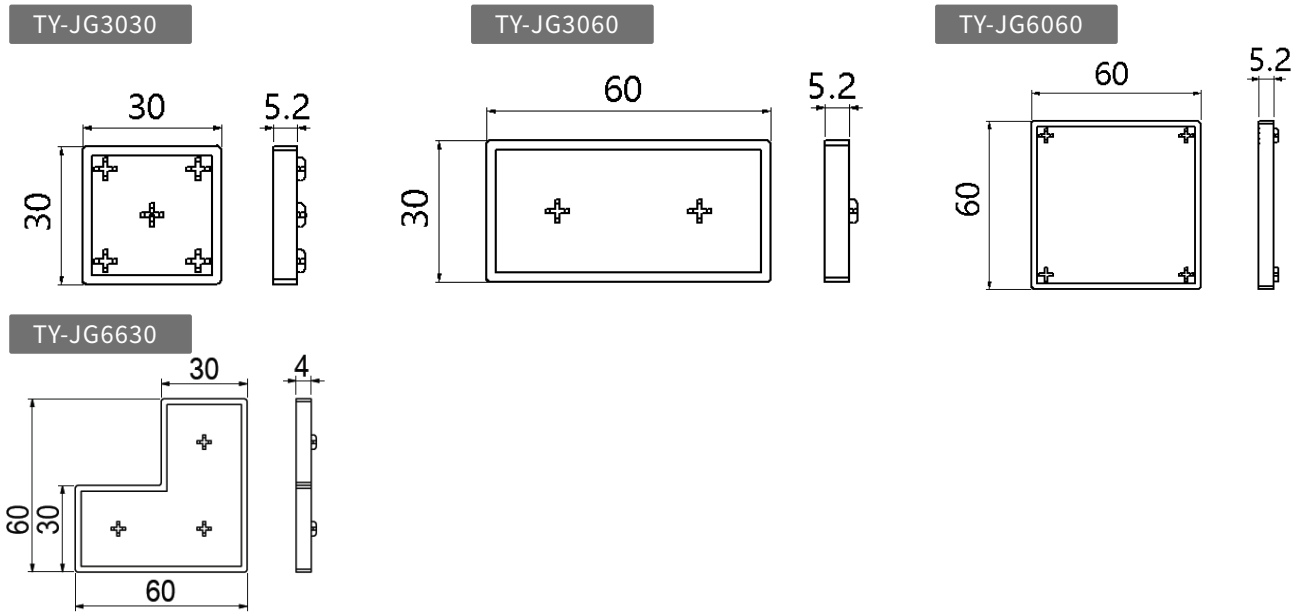

密封条 Sealing strip Usage: Profile surface decoration,easy to clean, dustproof Material: PVC Color: Black, gray, blue, Champagne

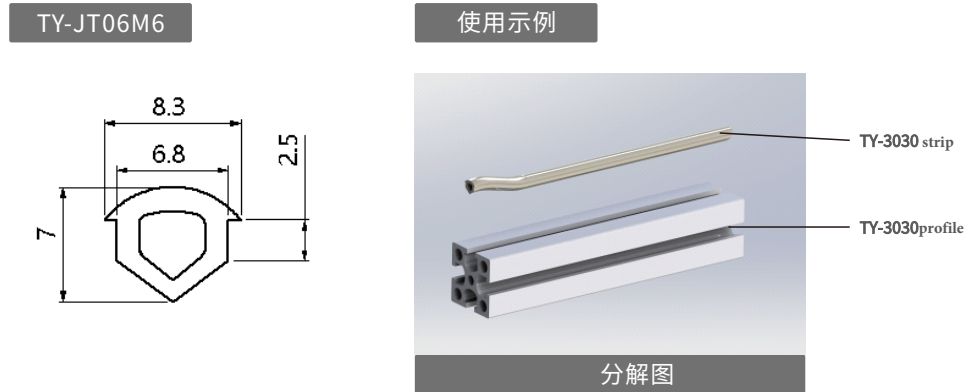


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

国标30系列型材配件 GB 30 series profile accessories


硬质胶条 Hard strip

Usage: Profile surface decoration, easy to clean, dustproof, flat Material: PVC Color: Black, gray

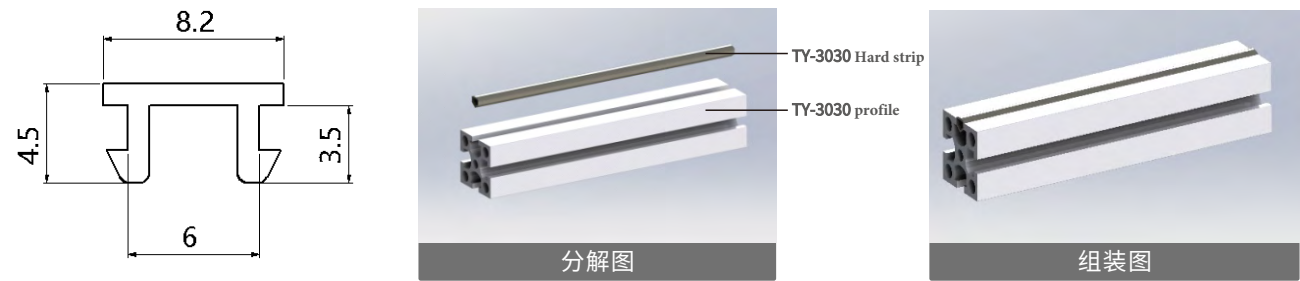


面板压条 Panel card strip

Usage For fixed of organic glass or other plates Material:PE Color:light gray

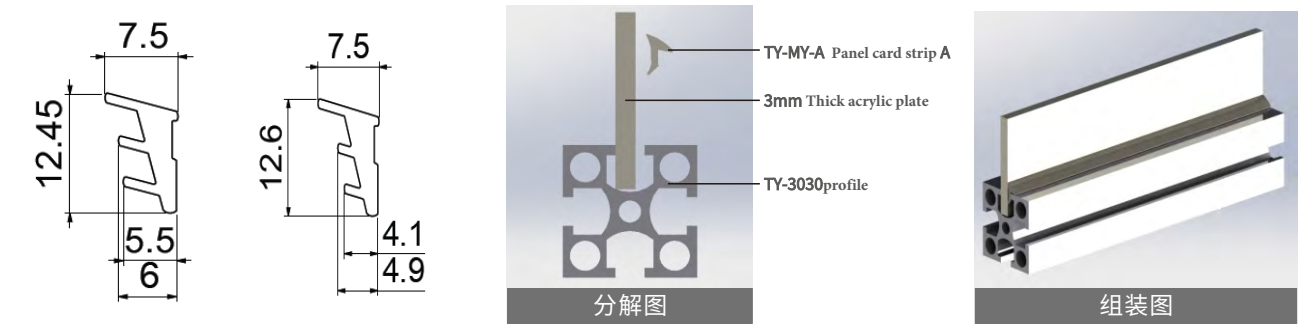

角码 Bracket


Usage: Connection of profiles to profiles and be used for the connection of profiles that need to be moved
Material :Cast aluminum 6063 aluminum alloy Finish: sand blast oxidation

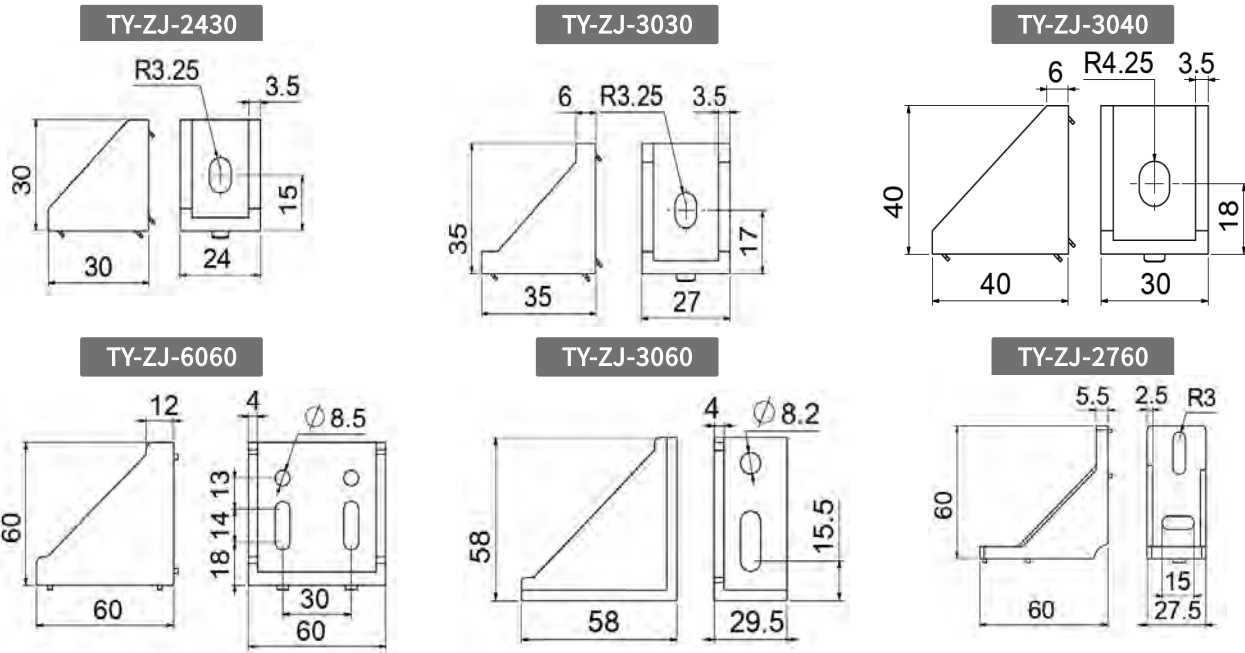


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

国标30系列型材配件 GB 30 series profile accessories
连接部分

角码 Bracket

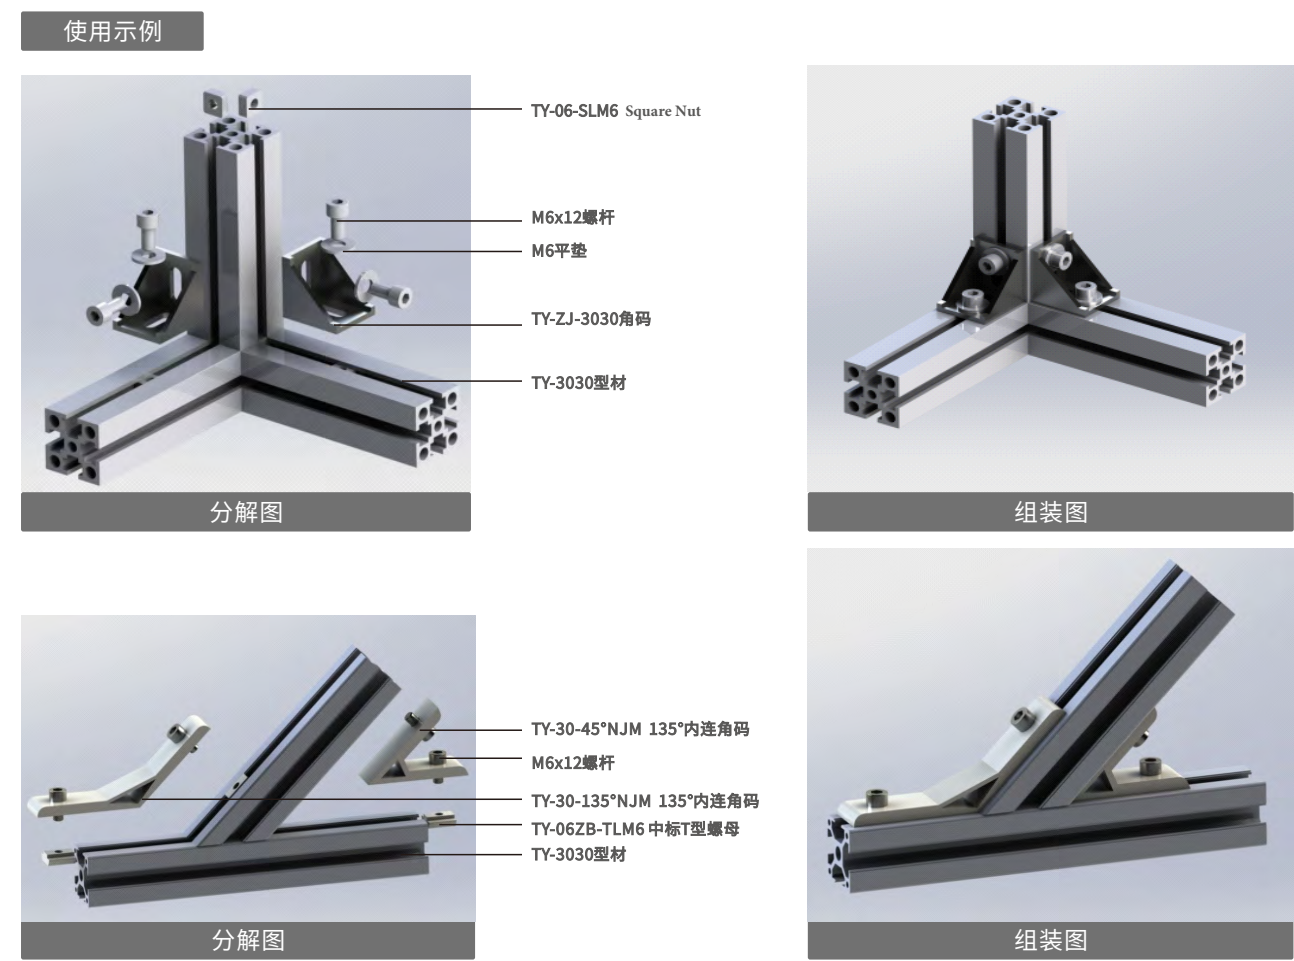

密封条 Sealing strip Usage: Profile surface decoration,easy to clean, dustproof Material: PVC Color: Black, gray, blue, Champagne

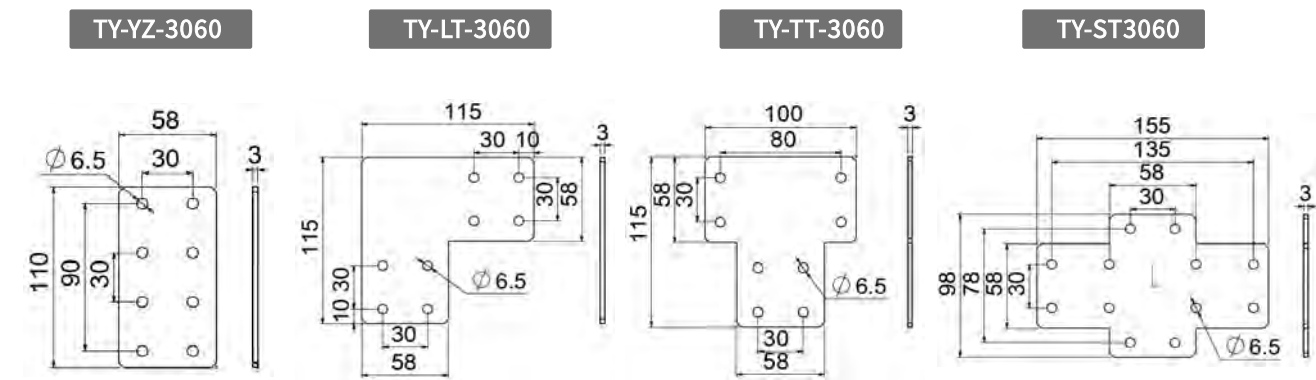


*图纸尺寸为参考资料, 具体以实物尺寸为准!
Drawing size is reference material,Subject to the actual size!

国标30系列型材配件 GB 30 series profile accessories


角度固定板 Angle plate connector

Usage: Used for high strength connection of L-shaped structure and T-shaped structure profiles
Material: carbon steel Finish: nicked-plated

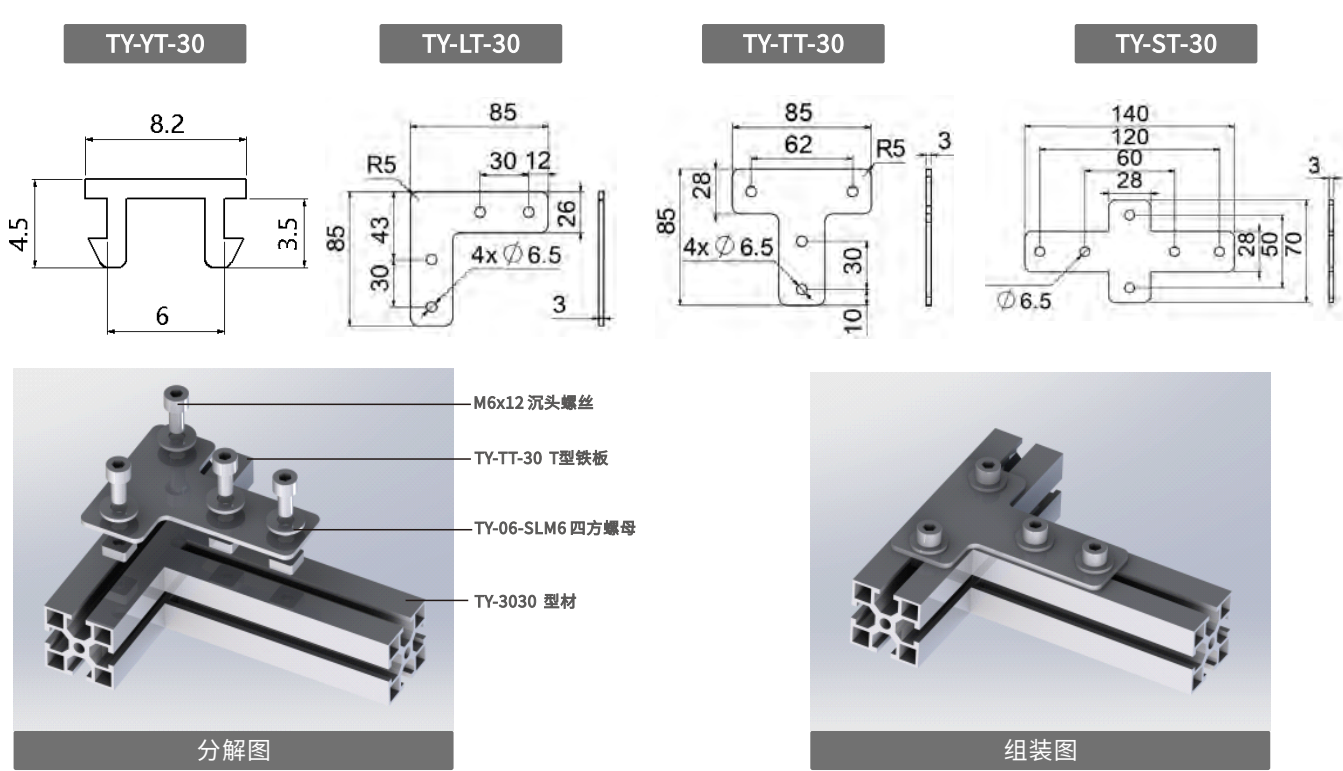



角度固定板 Angle connector

Usage: Used for high strength connection of L-shaped structure and T-shaped structure profiles
Material: carbon steel Finish: nicked-plated

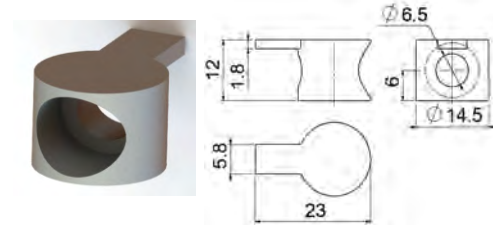

角度固定板 Groove connector


Usage: For high strength connection of profiles
Material: carbon steel Finish: nickel plating

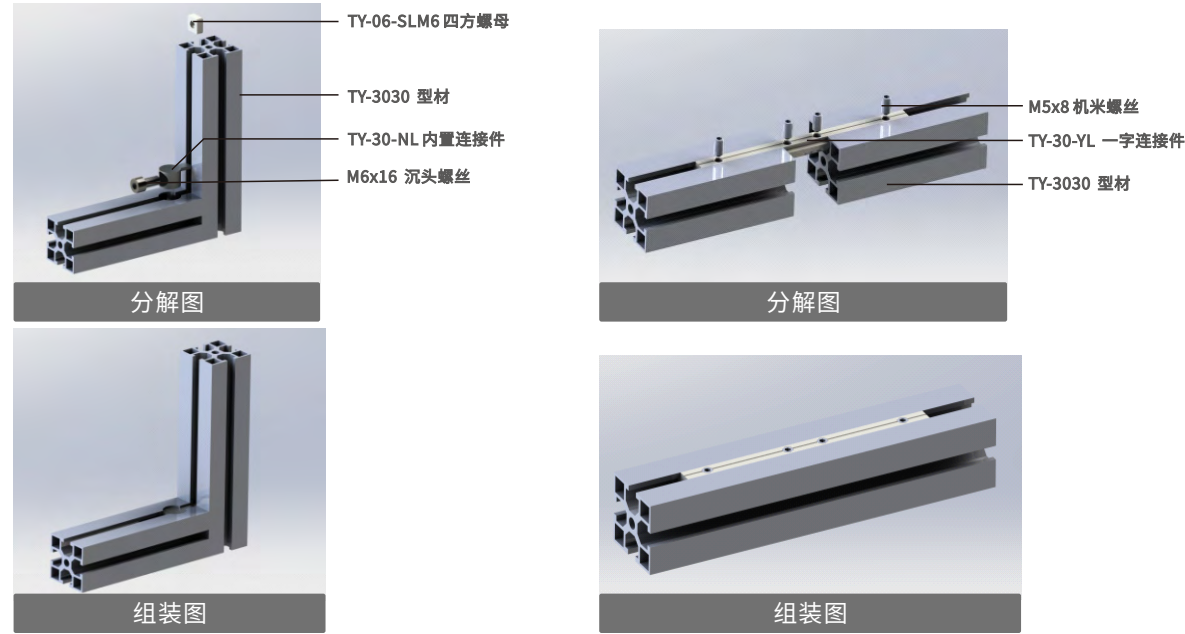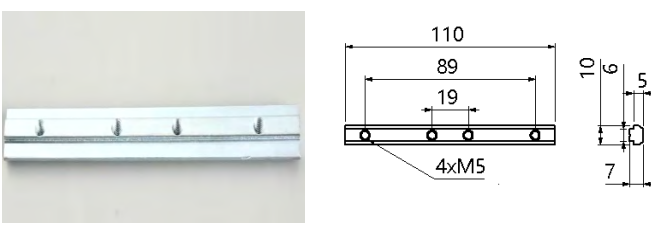


*图纸尺寸为参考资料, 具体以实物尺寸为准!
Drawing size is reference material,Subject to the actual size!

国标30系列型材配件 GB 30 series profile accessories
连件部分

压铸连接件 Angle Bracket Usage: For 90 degree connections between profiles Material: Zinc alloy Color: Nicked-plated

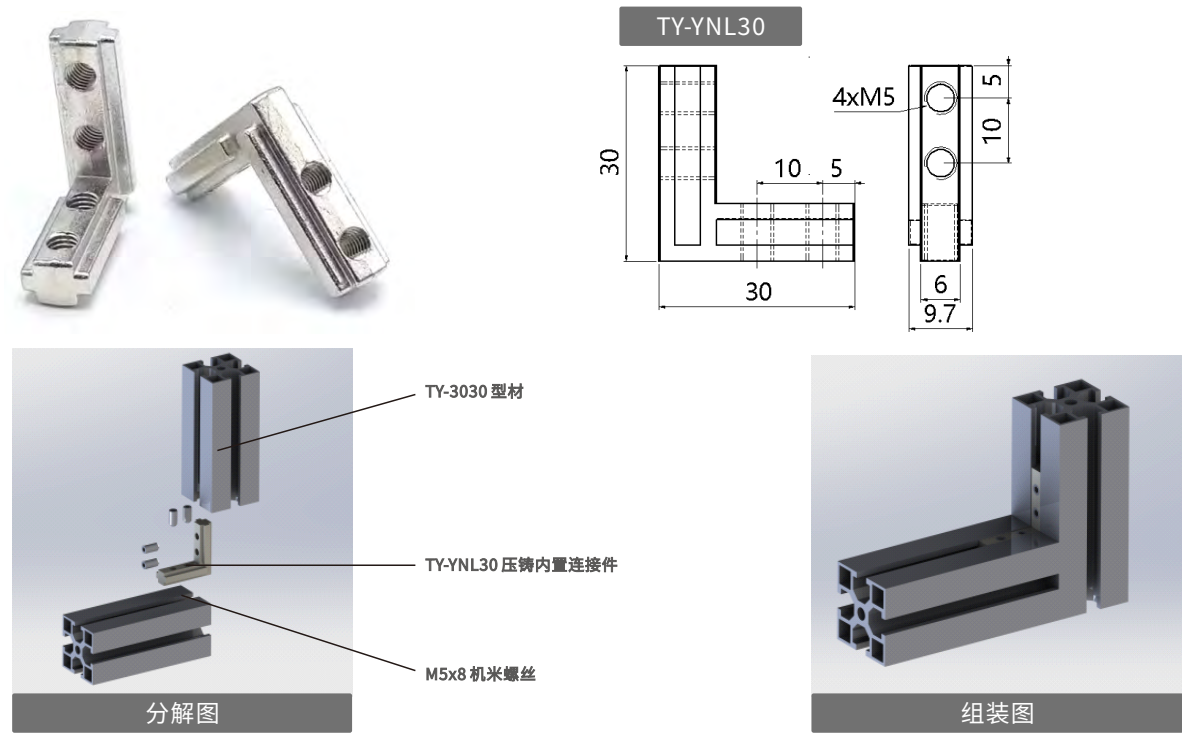


脚杯连接板 Foot connecting plate Usage: Connection between profiles and foot cup Material: Cost aluminum Finish: painting

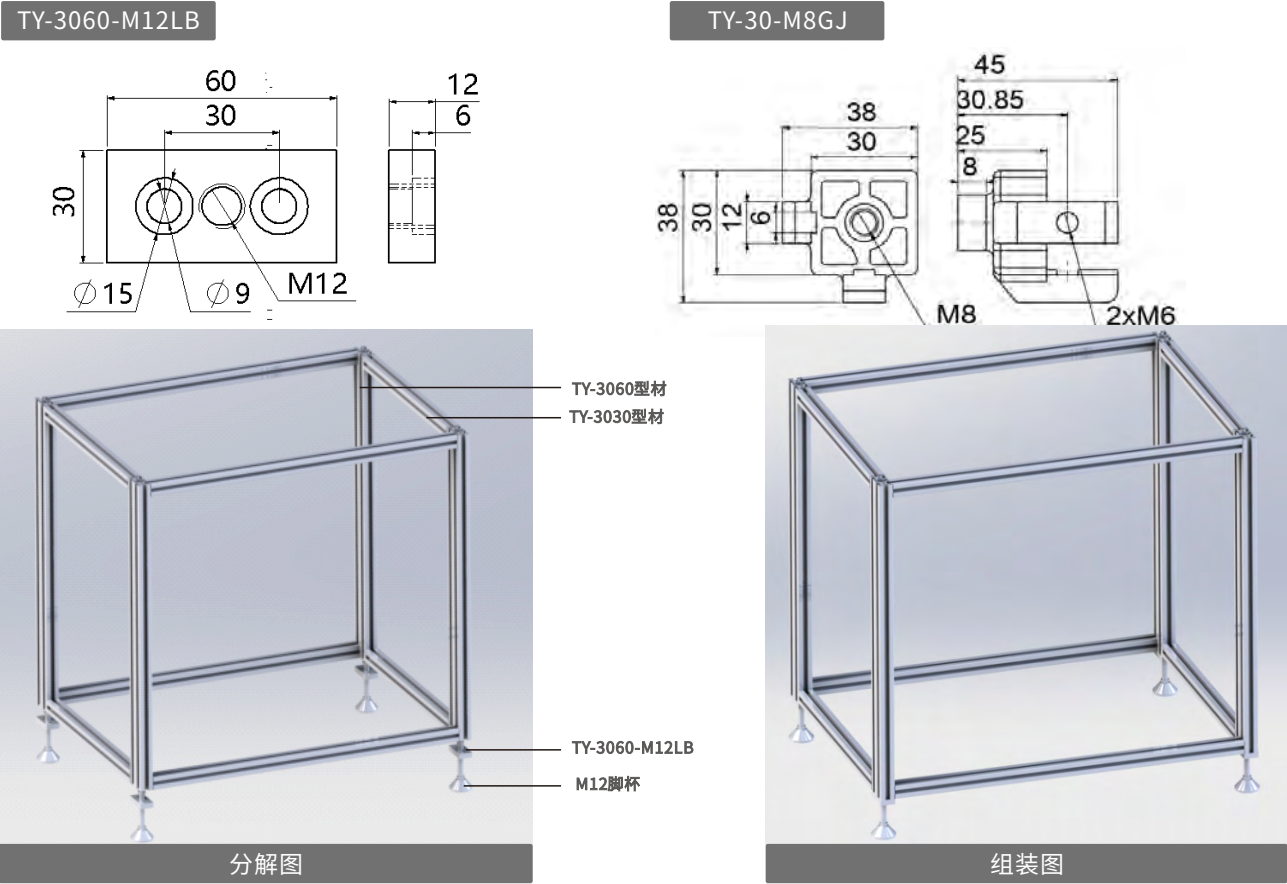


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material, Subject to the actual size!

国标30系列型材配件 GB 30 series profile accessories
紧固部分

T型螺母 T-Nuts Usage: Special nuts for assembling profiles, for use when overloading or missing loading Material: carbon steel Finish: Nicked-plated


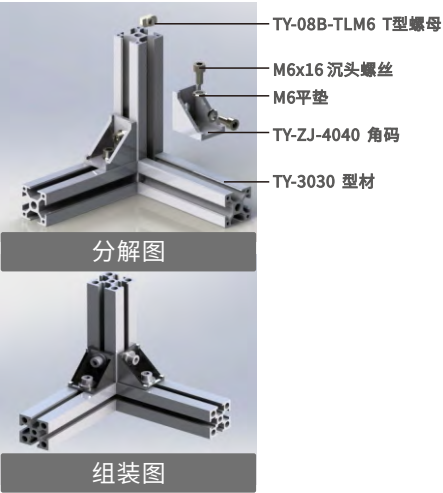


半圆螺母 Half round Nut Usage: Special nuts for assembling profiles, or for use when over loading or missing loading Material: carbon steel Finish: Nicked-plated


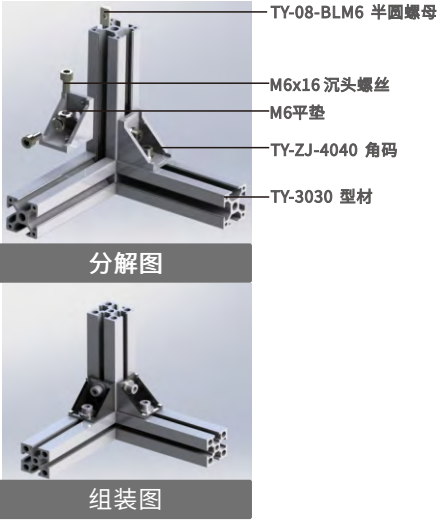


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material, Subject to the actual size!

四方螺母 Square Nut Usage: The regular nut for assembling profiles has a large contact surface with the notch of profiles and is not easy to deform Material: carbon steel Finish: Nicked-plated

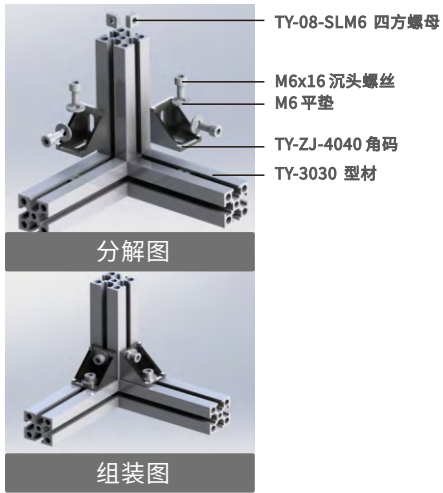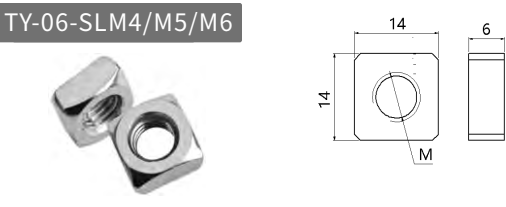

中标T型螺母 Slide-in T-nut Usage: For high strength connection between profiles and connectors Material: carbon steel Finish: Nicked-plated

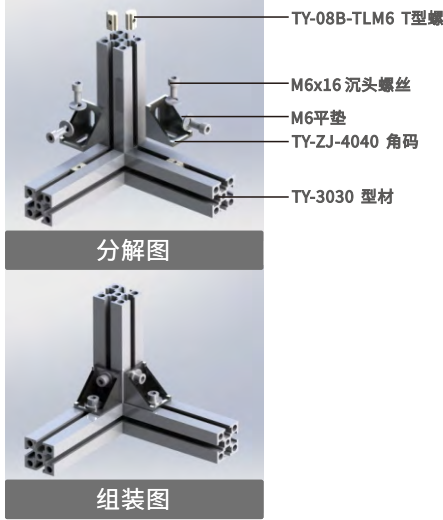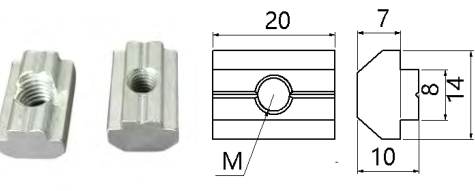


国标30系列型材配件 GB 30 series profile accessories

紧固部分


菱形螺母 Diamond Nut

Usage: Special nuts for assembling profiles, or for use when overloading and missing loading
Material: PVC **Color:** transparent

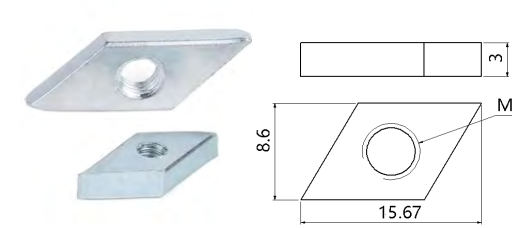


锤头螺杆 Hammer Screw


Usage: The profile is connected with the fixed surface to prevent the nut from loosening and can be placed outside
Material: carbon steel **Color:** transparent

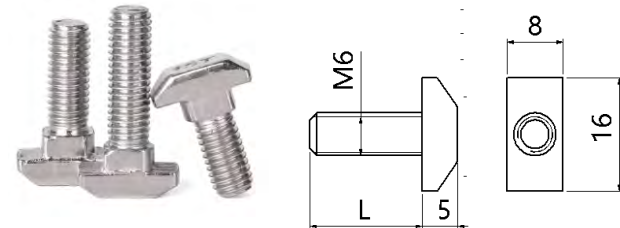


使用示例

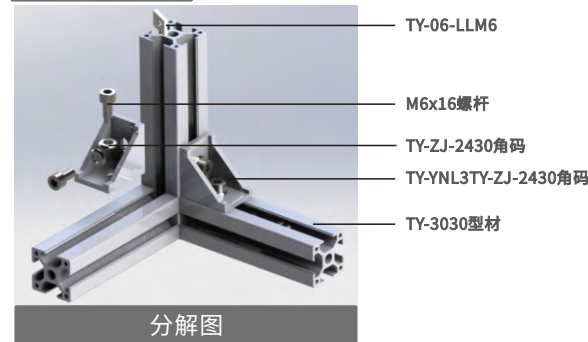


分解图

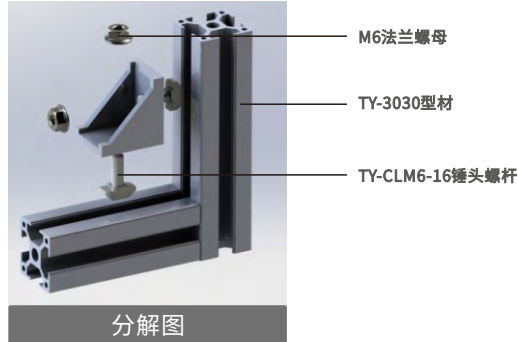

分解图

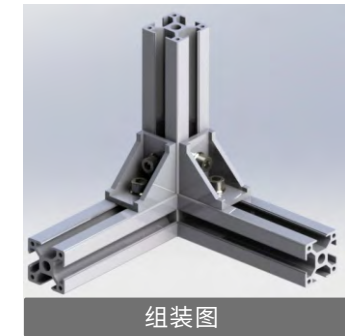


组装图

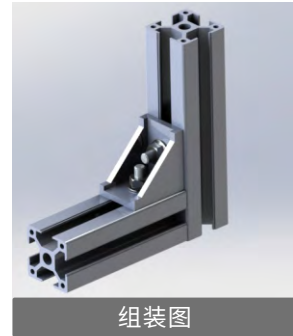


组装图

TY-JGG3040 间隔连接块 Connector

Usage: For the fixation of organic glass or other sealing plates, insert the fixing block into the profile groove and fix the corresponding plate with screws
Material: PVC **Color:** transparent

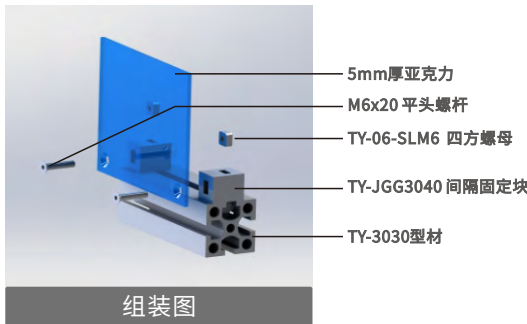

组装图



分解图

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material, Subject to the actual size!



TENYUM Aluminum, Empowering a better life


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material, Subject to the actual size!

TY-40 国标铝型材

TY-40 national standard series aluminum profiles

TY-8-4040







参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	1.87kg/m 6m/支
集合惯性 Mass of Inertia	Ix:11.32cm ⁴ ly:11.32cm ⁴
截面惯性 Section Moduius	Zx: 5.66cm ³ Zy: 5.66cm ³

TY-40 national standard series aluminum profiles

TY-8-4040-4






参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	0.96kg/m 6m/支
集合惯性 Mass of Inertia	Ix:5.31cm ⁴ ly:5.31cm ⁴
截面惯性 Section Moduius	Zx: 3.45cm ³ Zy: 3.45cm ³

TY-8-4040-2






参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	1.71kg/m 6m/支
集合惯性 Mass of Inertia	Ix:10.29cm ⁴ ly:10.29cm ⁴
截面惯性 Section Moduius	Zx: 5.15cm ³ Zy: 5.15cm ³

TY-8-4040-5






参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	1.85kg/m 6m/支
集合惯性 Mass of Inertia	Ix:10.87cm ⁴ ly:10.87cm ⁴
截面惯性 Section Moduius	Zx: 5.43cm ³ Zy: 5.43cm ³

TY-8-4040-3






参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	1.27kg/m 6m/支
集合惯性 Mass of Inertia	Ix:6.91cm ⁴ ly:6.91cm ⁴
截面惯性 Section Moduius	Zx: 3.45cm ³ Zy: 3.45cm ³

TY-8-4040-6





参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	1.90kg/m 6m/支
集合惯性 Mass of Inertia	Ix:11.29cm ⁴ ly:11.29cm ⁴
截面惯性 Section Moduius	Zx: 5.64cm ³ Zy: 5.64cm ³


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

TY-40 国标铝型材

TY-40 national standard series aluminum profiles

TY-8-4040-7





参数 PARAMETER	
材料	铝 Aluminum(6063)
Material	喷砂电泳/ 国标银白
单位质量	1.42kg/m 6m/支
Weight	
集合惯性	Ix:7.76cm ⁴ Iy:7.76cm ⁴
Mass of Inertia	
截面惯性	Zx: 3.88cm ³ Zy: 3.88cm ³
Section Moduius	

TY-8-4040-8-2N90

参数 PARAMETER

材料 铝 Aluminum(6063)

Material 喷砂电泳/ 国标银白

单位质量 1.42kg/m 6m/支

Weight

集合惯性 $I_x: 7.76\text{cm}^4$ $I_y: 7.76\text{cm}^4$

Mass of Inertia

截面惯性

$Z_x: 3.88\text{cm}^3$ $Z_y: 3.88\text{cm}^3$

Section Moduius

TY-8-4040-9-1N


参数 PARAMETER


材料	铝 Aluminum(6063)
Material	喷砂电泳/国标银白
单位质量	1.54kg/m 6m/支
Weight	
集合惯性	Ix:9.31cm ⁴ Iy:9.31cm ⁴
Mass of Inertia	
截面惯性	Zx: 4.65cm ³ Zy: 4.65cm ³
Section Moduius	

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

TY-40 national standard series aluminum profiles

TY-8-4040-10





参数 PARAMETER	
材料	铝 Aluminum(6063)
Material	喷砂电泳/ 国标银白
单位质量	1.36kg/m 6m/支
Weight	
集合惯性	Ix:7.98cm ⁴ Iy:7.98cm ⁴
Mass of Inertia	
截面惯性	Zx: 3.99cm ³ Zy: 3.99cm ³
Section Moduius	

TY-8-4040-11

参数 PARAMETER

材料	铝 Aluminum(6063)
Material	喷砂电泳/ 国标银白
单位质量	1.82kg/m 6m/支
Weight	
集合惯性	Ix:10.76cm ⁴ Iy:10.76cm ⁴
Mass of Inertia	
截面惯性	Zx: 5.38cm ³ Zy: 5.38cm ³
Section Moduius	

TY-8-4040-12

参数 PARAMETER

材料 铝 Aluminum(6063)

Material 喷砂电泳/ 国标银白

单位质量 1.69kg/m 6m/支

Weight

集合惯性 Ix:10.30cm⁴ Iy:10.30cm⁴

Mass of Inertia

截面惯性

Section Moduius



Zx: 5.15cm³ Zy: 5.15cm³

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


TY-40 国标铝型材

TY-40 national standard series aluminum profiles


TY-8-4080

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	2.20kg/m 6m/支
集合惯性 Mass of Inertia	Ix:13.17cm ⁴ ly:53.06cm ⁴
截面惯性 Section Moduius	Zx: 6.58cm ³ Zy: 26.53cm ³

TY-8-4080-2

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	2.14kg/m 6m/支
集合惯性 Mass of Inertia	Ix:12.68cm ⁴ ly:51.43cm ⁴
截面惯性 Section Moduius	Zx: 6.34cm ³ Zy: 25.71cm ³



TY-8-4080-3

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	2.87kg/m 6m/支
集合惯性 Mass of Inertia	Ix:19.38cm ⁴ ly:73.51cm ⁴
截面惯性 Section Moduius	Zx: 9.69cm ³ Zy: 12.85cm ³


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

TY-40 national standard series aluminum profiles


TY-8-4080-4

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	1.68kg/m 6m/支
集合惯性 Mass of Inertia	Ix:10.11cm ⁴ ly:40.70cm ⁴
截面惯性 Section Moduius	Zx: 5.05cm ³ Zy: 20.35cm ³

TY-8-4080-5

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	3.21kg/m 6m/支
集合惯性 Mass of Inertia	Ix:20.84cm ⁴ ly:78.03cm ⁴
截面惯性 Section Moduius	Zx: 10.42cm ³ Zy: 39.01cm ³

TY-8-4080-6-1N

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	3.20kg/m 6m/支
集合惯性 Mass of Inertia	Ix:21.73cm ⁴ ly:78.34cm ⁴
截面惯性 Section Moduius	Zx: 10.42cm ³ Zy: 39.01cm ³

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

TY-40 国标铝型材


TY-40 national standard series aluminum profiles

TY-8-4080-7-3N

参数 PARAMETER	
材料	铝 Aluminum(6063)
Material	喷砂电泳/ 国标银白
单位质量	3.93kg/m 6m/支
Weight	
集合惯性	Ix:24.91cm ⁴ Iy:87.79cm ⁴
Mass of Inertia	
截面惯性	Zx:12.45cm ³ Zy: 43.99cm ³
Section Moduius	

TY-8-4080-8





参数 PARAMETER	
材料	铝 Aluminum(6063)
Material	喷砂电泳/ 国标银白
单位质量	2.47kg/m 6m/支
Weight	
集合惯性	Ix:15.80cm ⁴ Iy:61.17cm ⁴
Mass of Inertia	
截面惯性	Zx: 7.90cm ³ Zy: 30.58cm ³
Section Moduius	

TY-8-4080-9

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

TY-40 national standard series aluminum profiles

TY-8-4080-10

参数 PARAMETER	
材料	铝 Aluminum(6063)
Material	喷砂电泳/ 国标银白
单位质量	2.91kg/m 6m/支
Weight	
集合惯性	Ix:19.60cm ⁴ Iy:73.64cm ⁴
Mass of Inertia	
截面惯性	Zx: 9.80cm ³ Zy: 36.82cm ³
Section Moduius	

TY-8-4080-11

参数 PARAMETER

材料 铝 Aluminum(6063)

Material 喷砂电泳/ 国标银白

单位质量 2.20kg/m 6m/支

Weight

集合惯性 $I_x: 13.17 \text{cm}^4$ $I_y: 53.06 \text{cm}^4$

Mass of Inertia

截面惯性 $Z_x: 6.58 \text{cm}^3$ $Z_y: 26.53 \text{cm}^3$

Section Moduius

TY-8-4080-12


参数 PARAMETER	
材料	铝 Aluminum(6063)
Material	喷砂电泳/ 国标银白
单位质量	3.00kg/m 6m/支
Weight	
集合惯性	Ix:19.65cm ⁴ Iy:75.430cm ⁴
Mass of Inertia	
截面惯性	Zx: 6.58cm ³ Zy: 26.53cm ³
Section Moduius	

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


TY-40 国标铝型材

TY-40 national standard series aluminum profiles


TY-8-4080-13

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/国标银白
单位质量 Weight	3.51kg/m 6m/支
集合惯性 Mass of Inertia	Ix:20.93cm ⁴ Iy:79.08cm ⁴
截面惯性 Section Moduius	Zx: 10.46cm ³ Zy: 38.54cm ³

TY-8-8080

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/国标银白
单位质量 Weight	4.22kg/m 6m/支
集合惯性 Mass of Inertia	Ix:121.55cm ⁴ Iy:121.55cm ⁴
截面惯性 Section Moduius	Zx:60.77cm ³ Zy: 60.77cm ³

TY-8-8080-2



 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/国标银白
单位质量 Weight	5.24kg/m 6m/支
集合惯性 Mass of Inertia	Ix:133.02cm ⁴ Iy:133.02cm ⁴
截面惯性 Section Moduius	Zx: 66.51cm ³ Zy: 66.51cm ³

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


TY-50 国标铝型材

TY-50 national standard series aluminum profiles

TY-8-5050

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/国标银白
单位质量 Weight	2.43kg/m 6m/支
集合惯性 Mass of Inertia	Ix:22.51cm ⁴ Iy:22.51cm ⁴
截面惯性 Section Moduius	Zx: 11.25cm ³ Zy: 11.25cm ³




TY-8-50100

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/国标银白
单位质量 Weight	2.75kg/m 6m/支
集合惯性 Mass of Inertia	Ix:42.82cm ⁴ Iy:42.82cm ⁴
截面惯性 Section Moduius	Zx: 21.41cm ³ Zy: 21.41cm ³


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

国标40/50系列型材配件 GB 40/50 series profile accessories
附件部分

端盖 Cap Usage: Cover the exposed end of the profile bracket, dustproof, beautiful Material: plastic Color: black

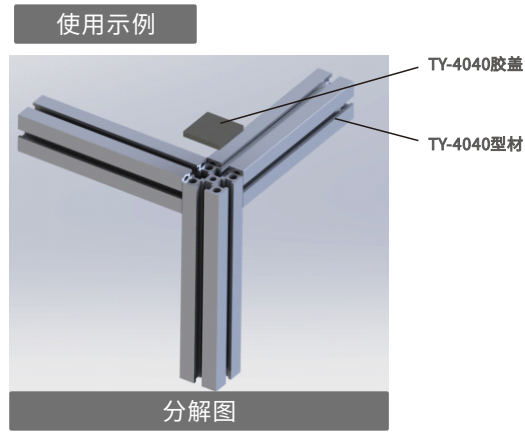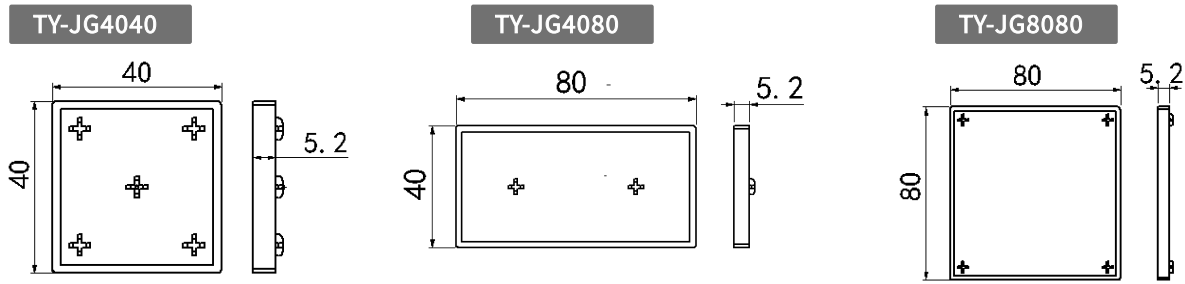

密封条 Sealing strip Usage: Profile surface decoration, easy to clean, dustproof Material: PVC Color: black, gray, blue, Champagne

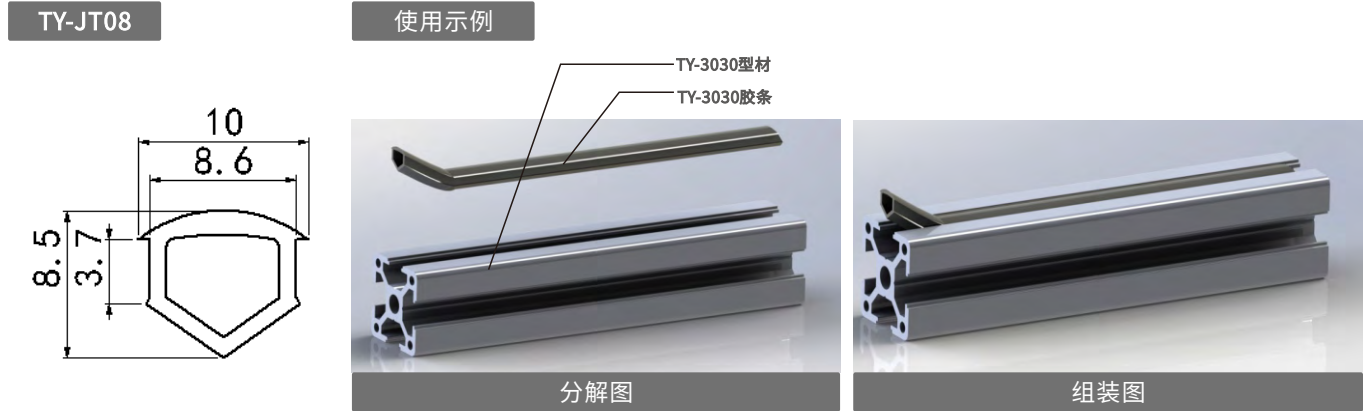


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material, Subject to the actual size!

国标40/50系列型材配件 GB 40/50 series profile accessories


硬质胶条 Hard strip

Usage: Profile surface decoration, easy to clean, dustproof, flat
Material: PVC Color: black, gray

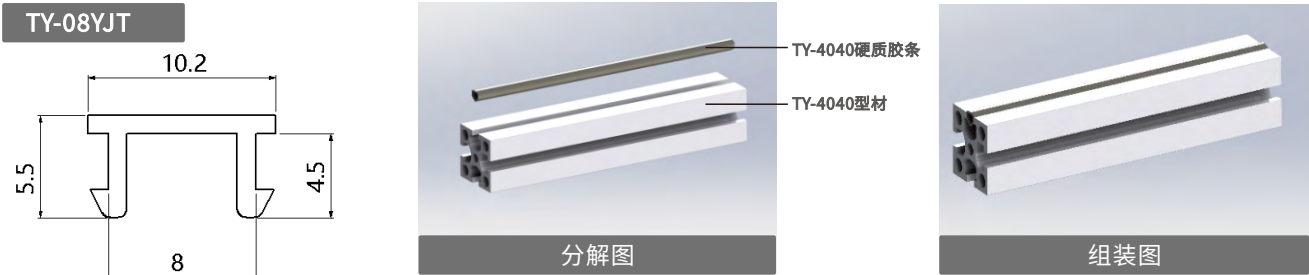


面板压条 Panel card strip

Usage: Fixation of organic glass or other sheets
Material: PE Color: light gray

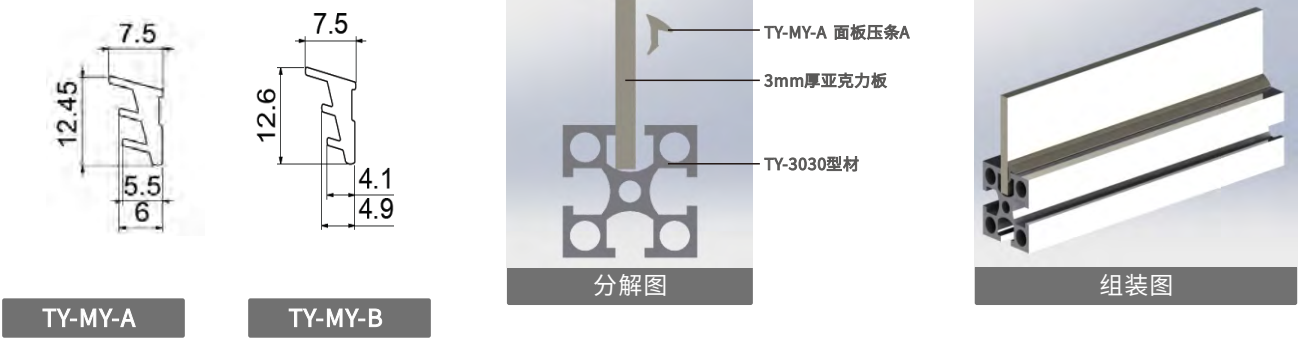

角码 Bracket

Usage: The connection of profiles to profiles and be used for the connection of profiles that need to be moved
Material: Cast aluminum 6063 aluminum alloy Finish: Sand blast oxidation

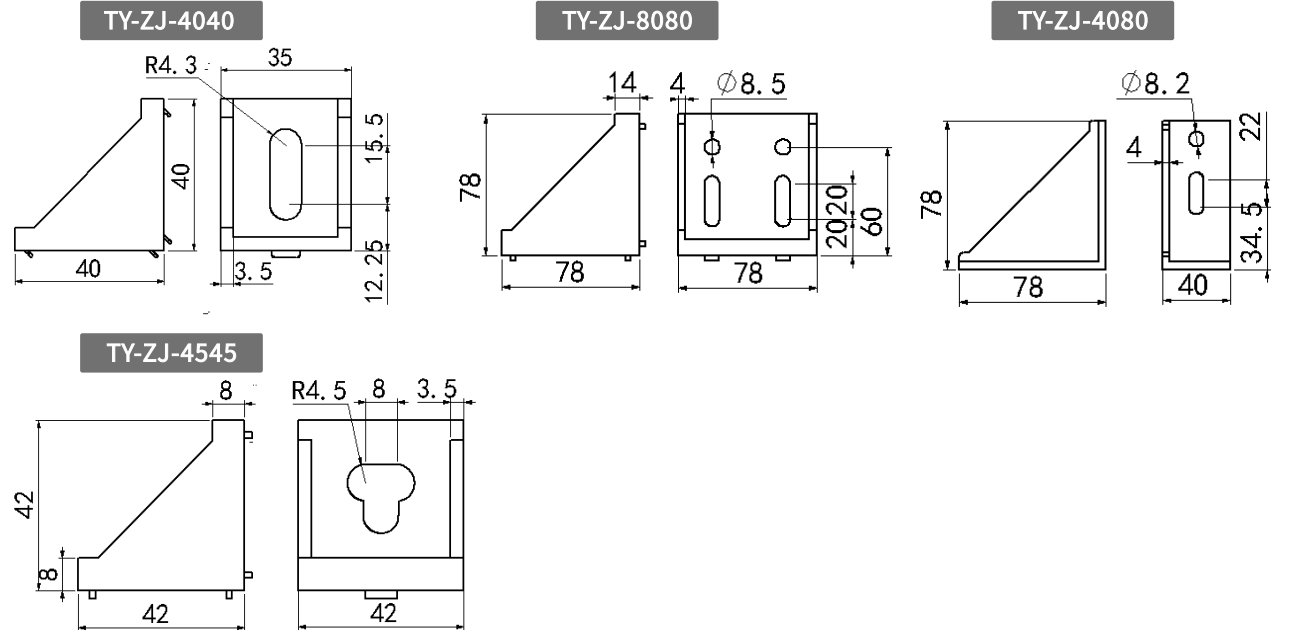


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material, Subject to the actual size!

国标40/50系列型材配件
连接部分

GB 40/50 series profile accessories

角码 Bracket

使用示例

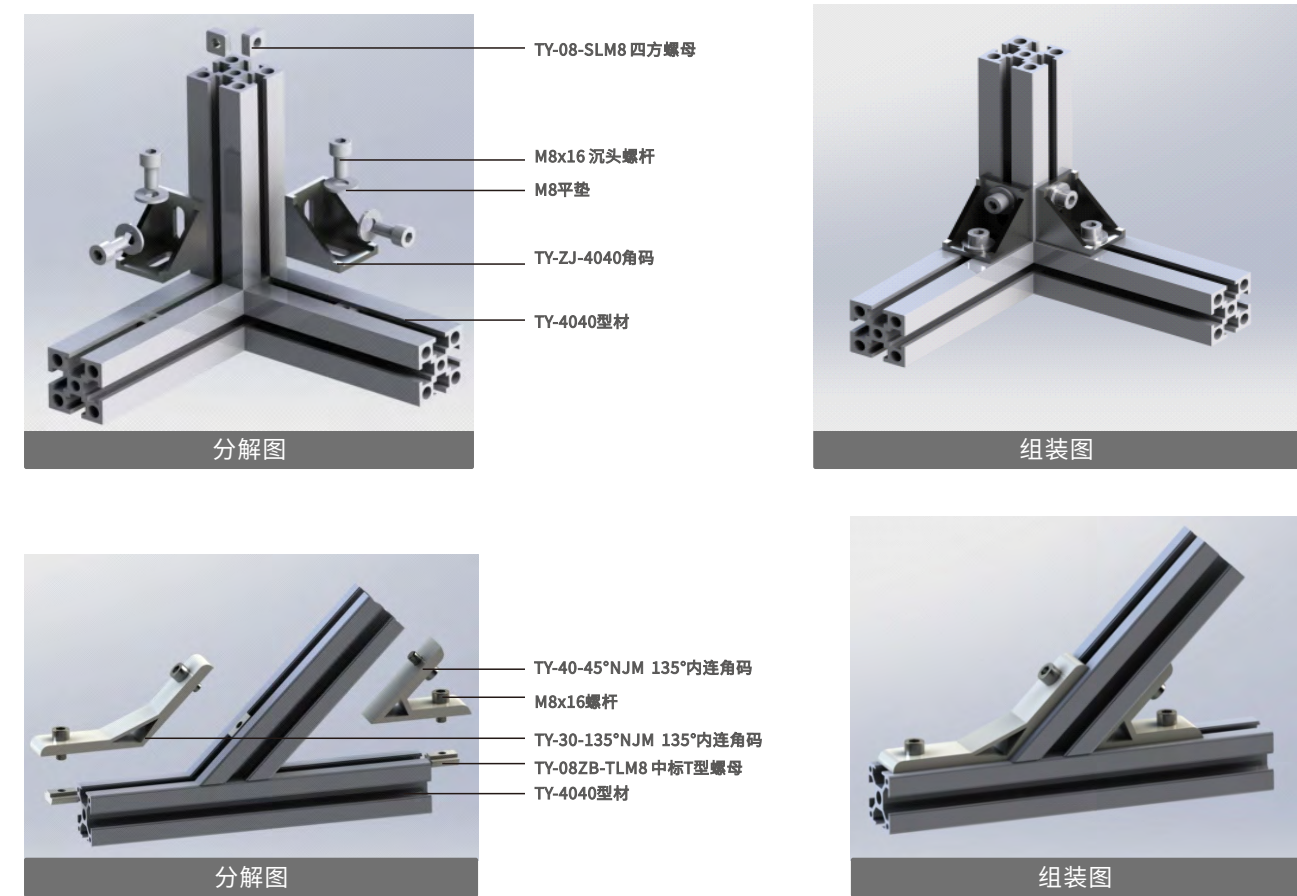


密封条 Sealing strip

Usage: Profile surface decoration,easy to clean, dustproof

Material:PVC

Color: Black, gray, blue, Champagne

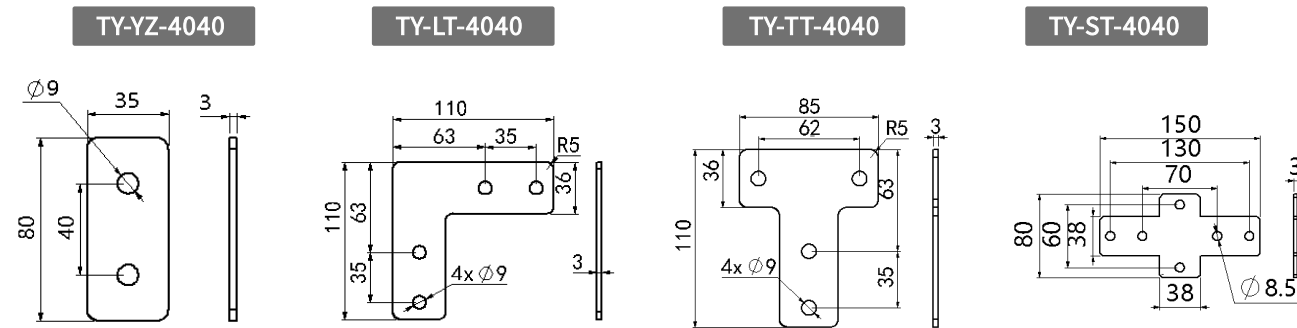


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

国标40/50系列型材配件

GB 40/50 series profile accessories

角度固定板 Angle plate connector

Usage: Used for high strength connection of L-shaped structure and T-shaped structure profiles
Material:carbon steel Finish:Nicked-plated

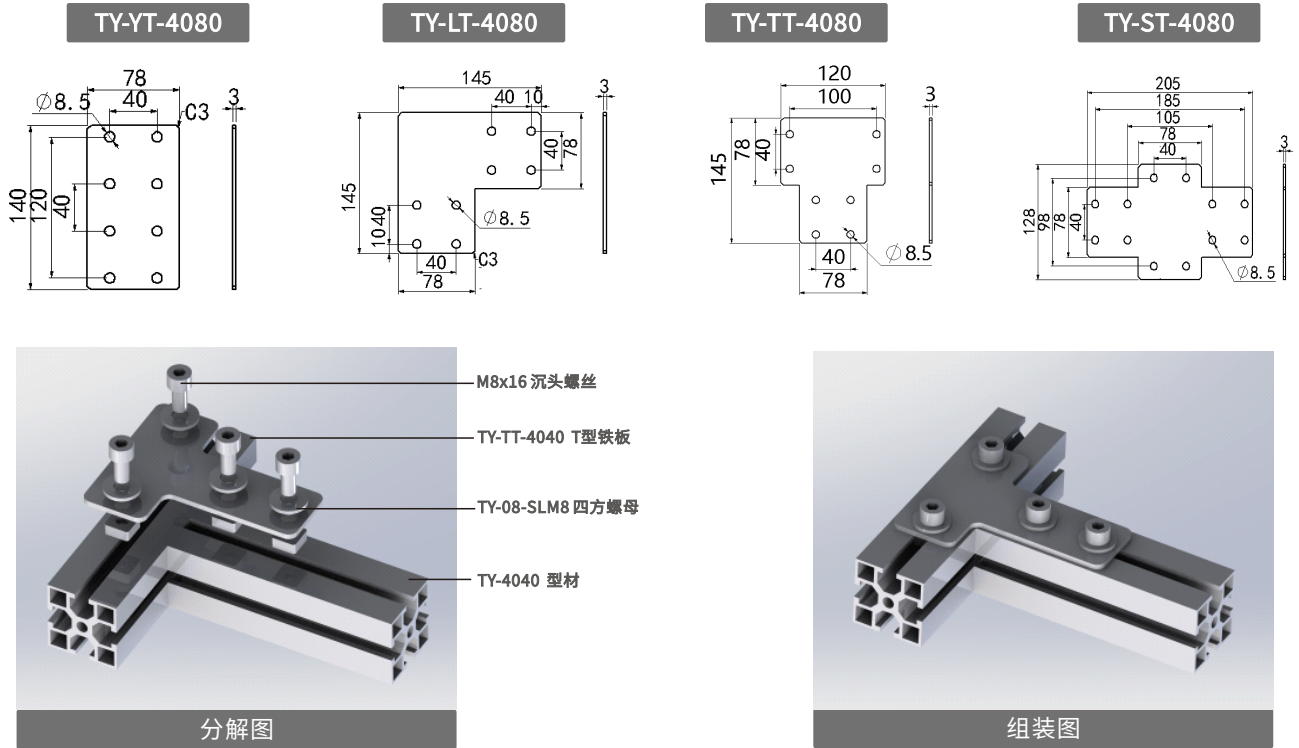

角度固定板 Angle bracket

Usage: Used for high strength connection of L-shaped structure and T-shaped structure profiles

Material:carbon steel


Finish: Nicked-plated

角度固定板 Groove connector

Usage: Used for high strength connection of profiles

Material:carbon steel

Finish:Nicked-plated

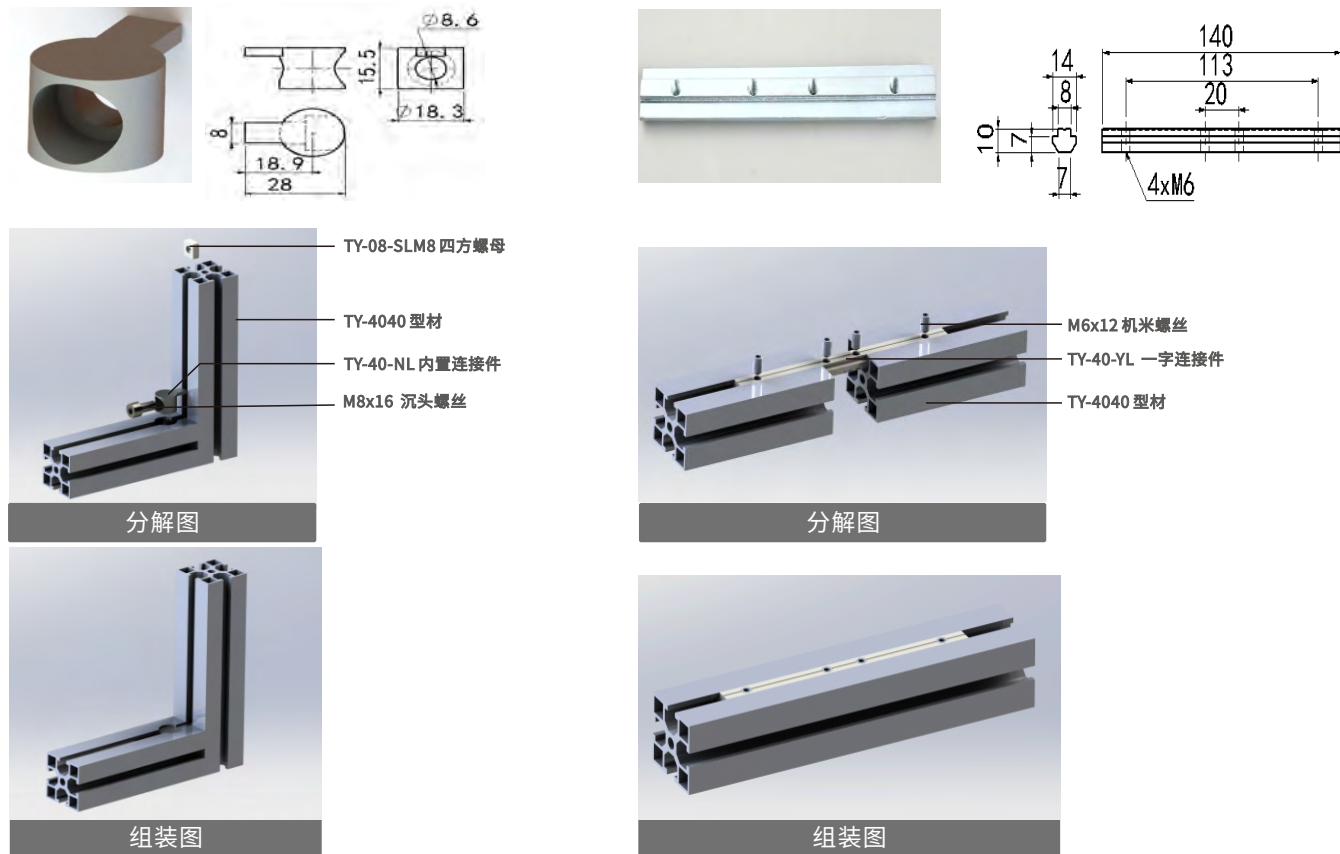


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


国标40/50系列型材配件
连件部分

GB 40/50 series profile accessories

压铸连接件 Angle Bracket **Usage:**For 90 degree connections between profiles **Material:**Zinc alloy **Color:**nicked-plated

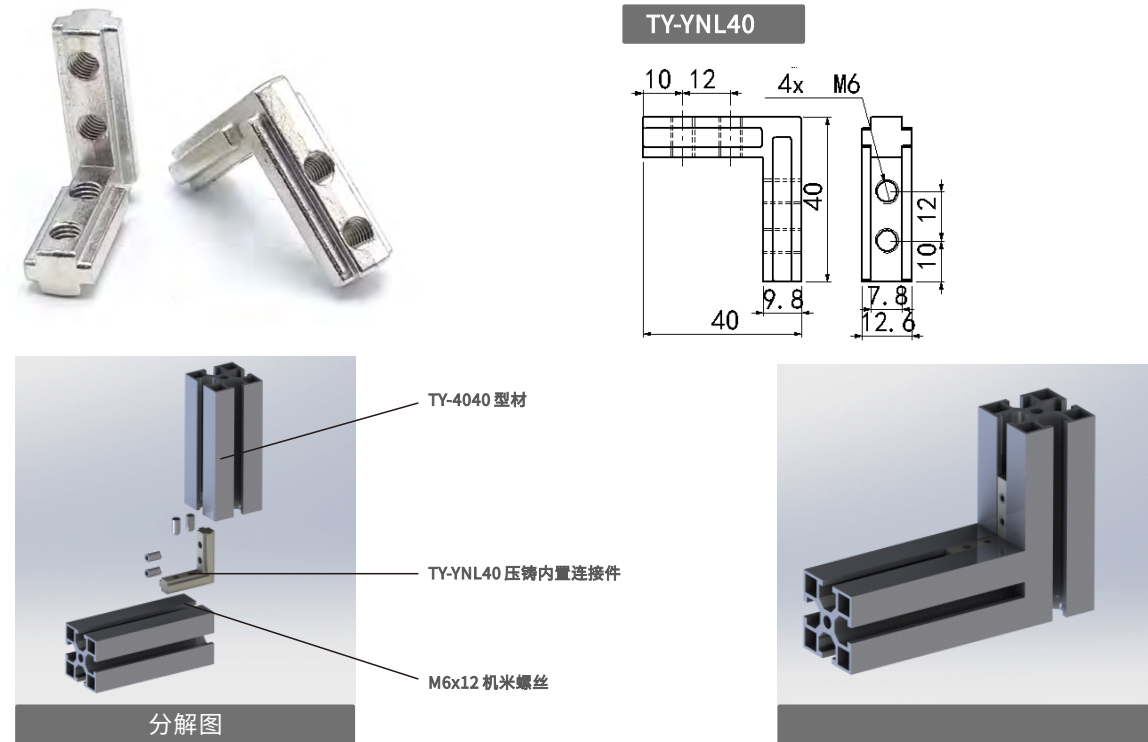

脚杯连接板 Foot connecting plate **Usage:**Connection between profiles and foot cup **Material:**cast aluminum **Finish:**Painting

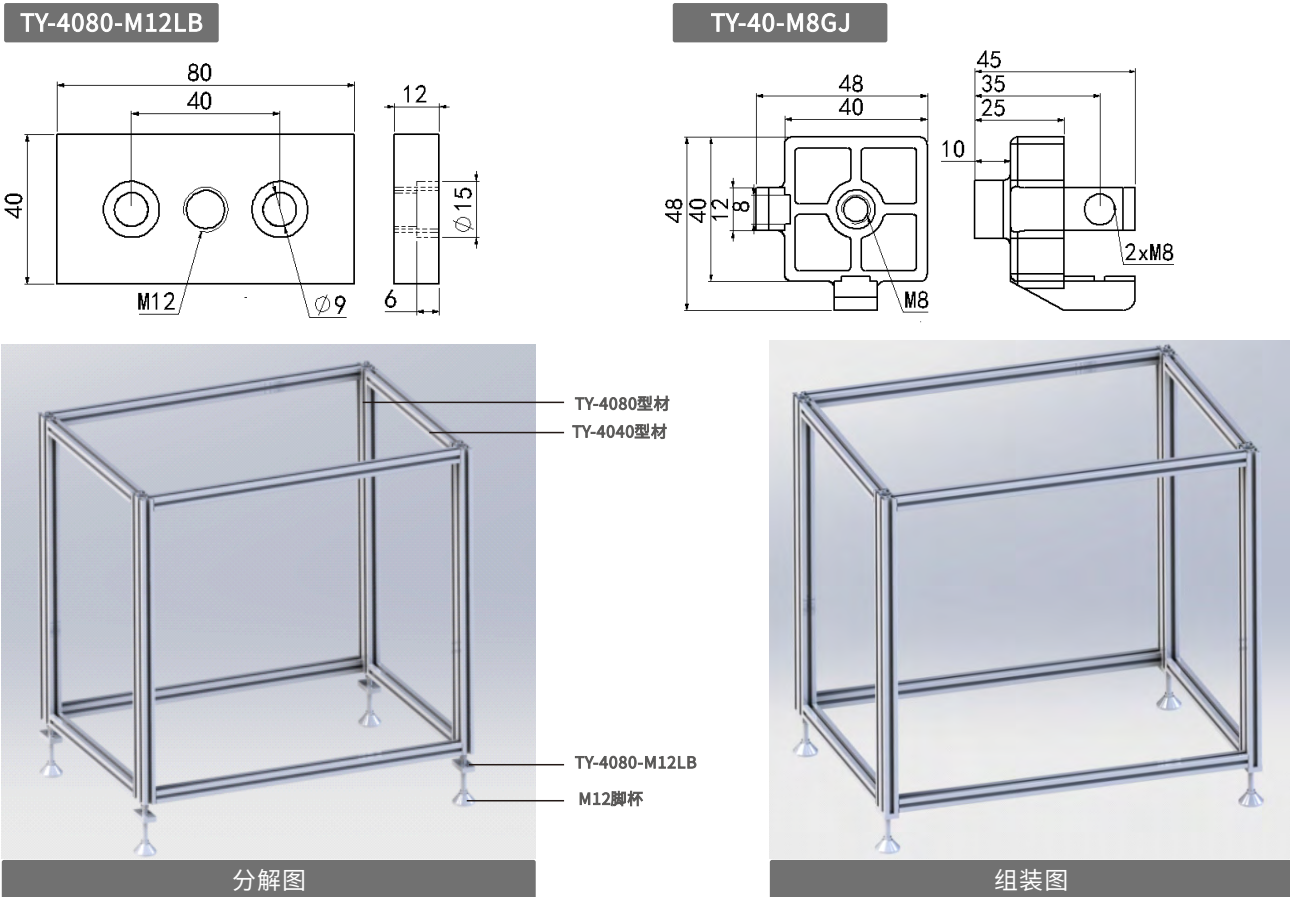

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

国标40/50系列型材配件
紧固部分

GB 40/50 series profile accessories

T型螺母 T-Nuts

Usage: Special nuts for assembling profiles, or for use when overloading and missing loading **Material:**carbon steel **Finish:**nicked-plated



半圆螺母 Half round nut


Usage:Specialnuts for assembling profiles, or for use when overloading and missing loading **Material :**Carbon steel **Finish:**nicked-plated



*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

四方螺母 Square nut

Usage: The regular nut for assembling profiles has a large contact surface with the notch of profiles and is not easy to deform **Material:**carbon steel **Finish:**nicked-plated

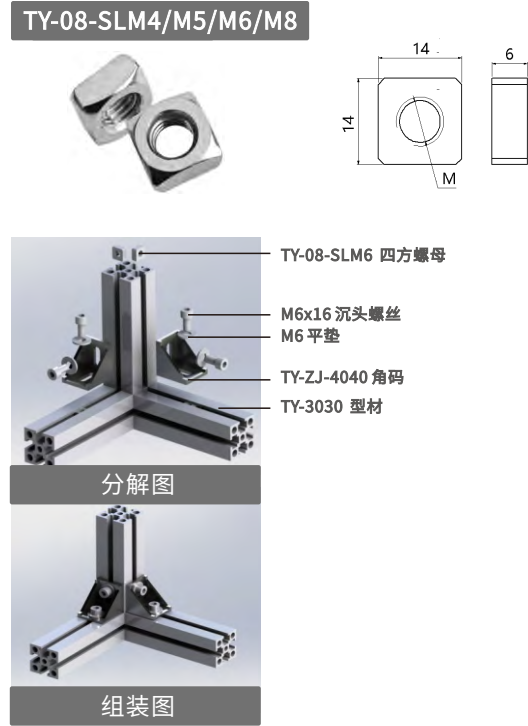

中标T型螺母 Slide-in T-nut

Usage: For high strength connection between profiles and connectors **Material:**carbon steel **Finish:**nicked-plated



国标40/50系列型材配件


GB 40/50 series profile accessories

紧固部分


菱形螺母 Diamond nut

Usage: Special nuts for assembling profiles, and use when overloading or missing loading **Material:** PVC **Color:** transparent

TY-08-LLM4/M5/M6/M8

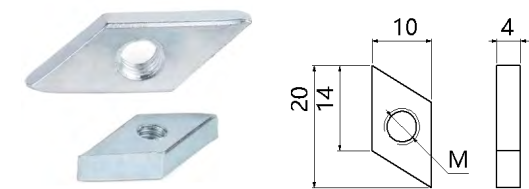

使用示例

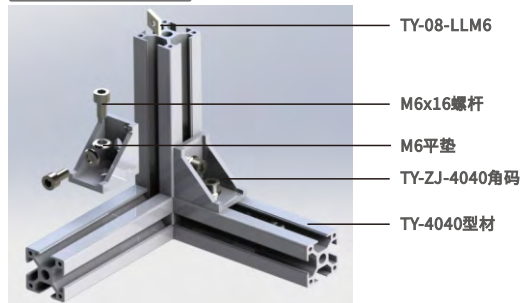

组装图





分解图

锤头螺杆 Hammer screw

Usage: The profile is connected with the fixed surface to prevent the nut from loosening and can be placed outside **Material:** carbon steel **Finish:** Nicked-plated

TY-CLM8-16/20/25

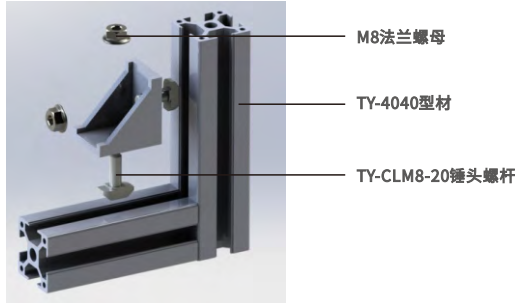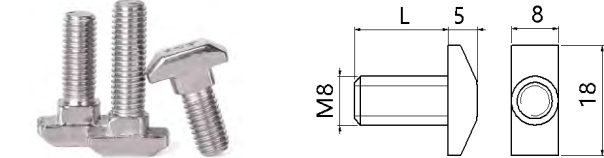



组装图




分解图

TY-JGG3040 间隔连接块 Connector

Usage: For the fixation of organic glass or other sealing plates, insert the fixing block into the profile groove and fix the corresponding plate with screws **Material:** PVC **Color:** transparent

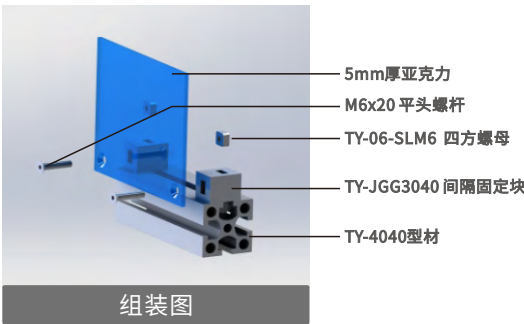

组装图



分解图


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material, Subject to the actual size!

TENYUM Aluminum, Empowering a better life




欧标30系列型材配件 European standard 30 series profile accessories
附件部分

端盖 **Usage:** Covert he exposed end of the profile bracket, dustproof, beautiful **Material:** Plastic **Color:**black

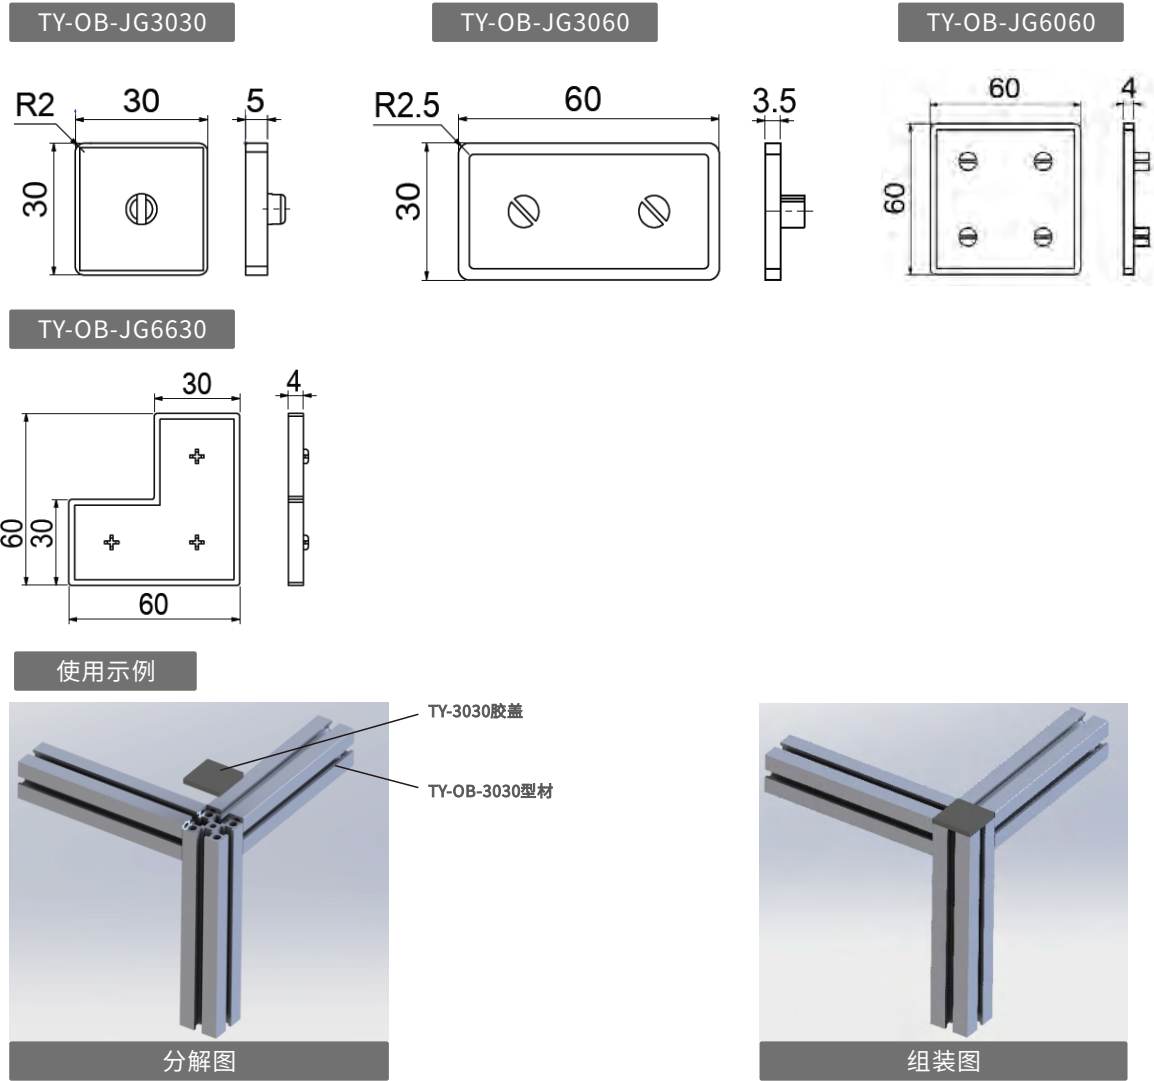

密封条 **Usage:** For profile surface decoration , easy to clean, dustproof **Material:**PVC **Color:** Black, gray, blue, Champagne

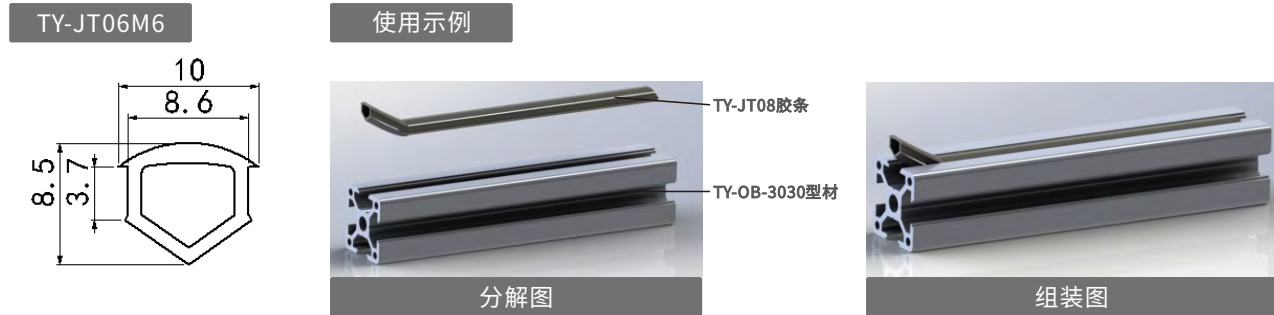


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

欧标30系列型材配件 European standard 30 series profile accessories


硬质胶条

Usage: For Profile surface decoration , easy to clean, dustproof, flat **Material:**PVC **Color:** Black, gray

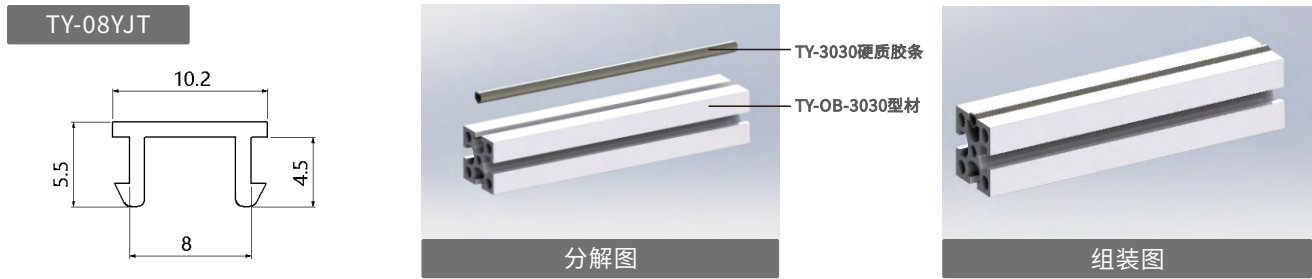


面板压条

Usage: Fixation of organic glass or other plates **Material:** PE **Color:** light gray

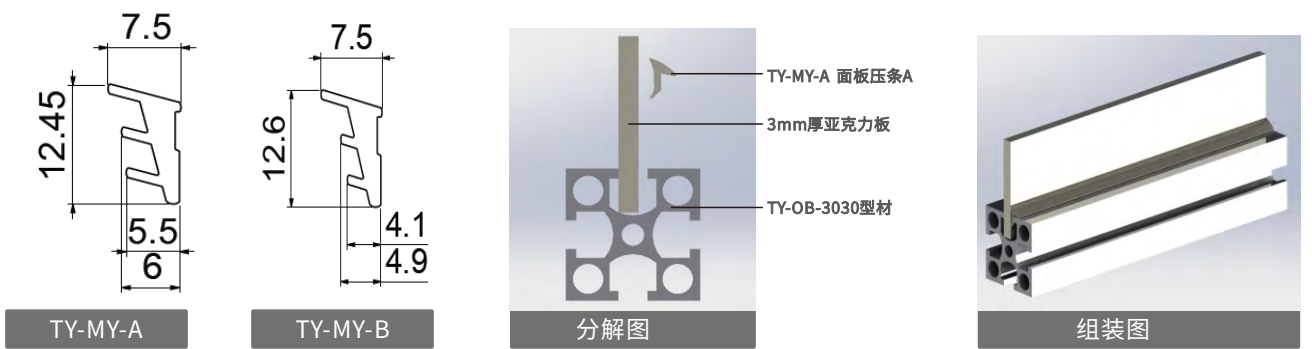

角码

Usage:The connection of profiles to profiles and be used for the connection of profiles that need to be moved
Material:Cast aluminum 6063 aluminum alloy **Finish:** Sand blast oxidation

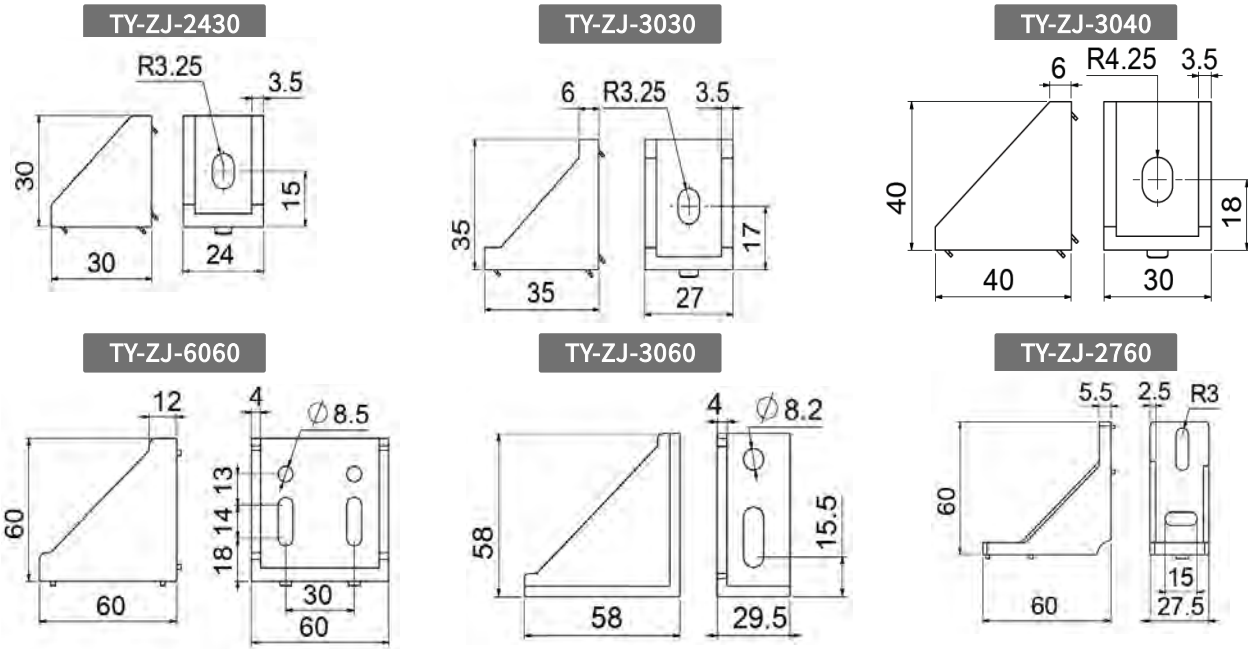





*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

欧标30系列型材配件
连接部分

European standard 30 series profile accessories

角码Bracket


使用示例

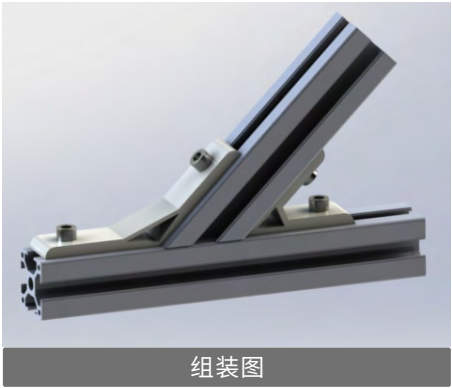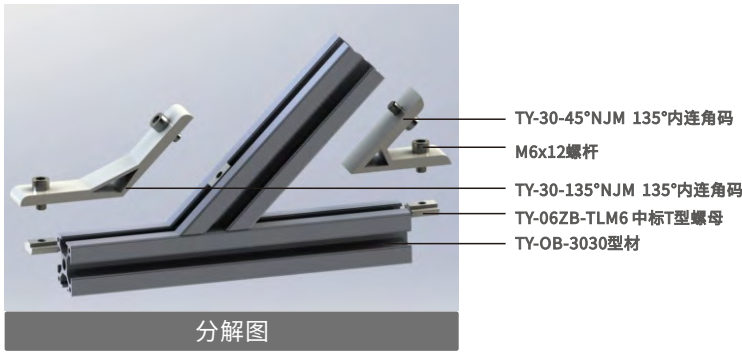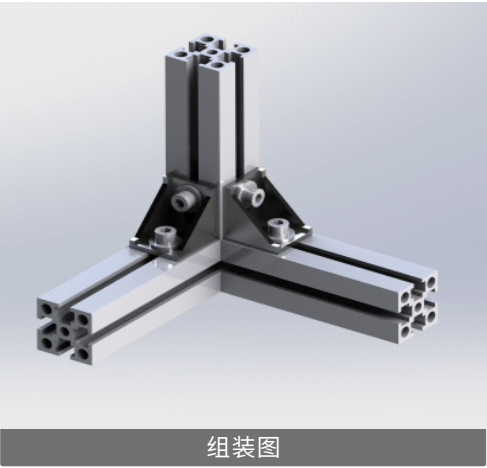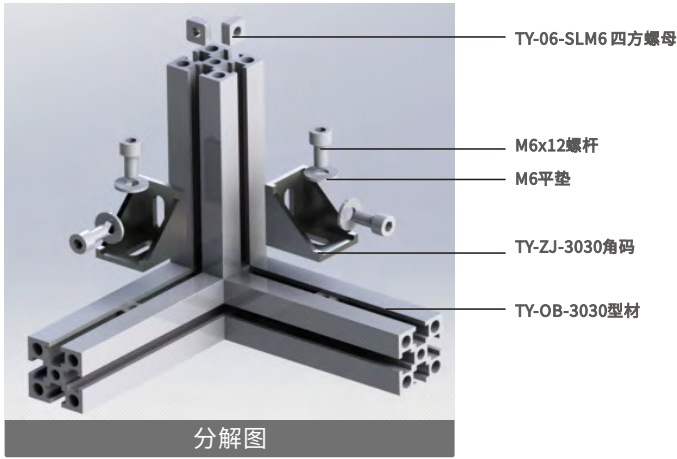


密封条Sealing strip

Usage : For Profile surface decoration , easy to clean, dustproof Material:PVC Color: Black, gray, blue, Champagne


TY-YZ-3060




TY-LT-3060



TY-TT-3060



TY-ST3060




*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

欧标30系列型材配件

European standard 30 series profile accessories




角度固定板Angle connector

Usage: Used for high strength connection of L-shaped structure and T-shaped structure profiles
Material:carbon steel Finish:nicked-plated

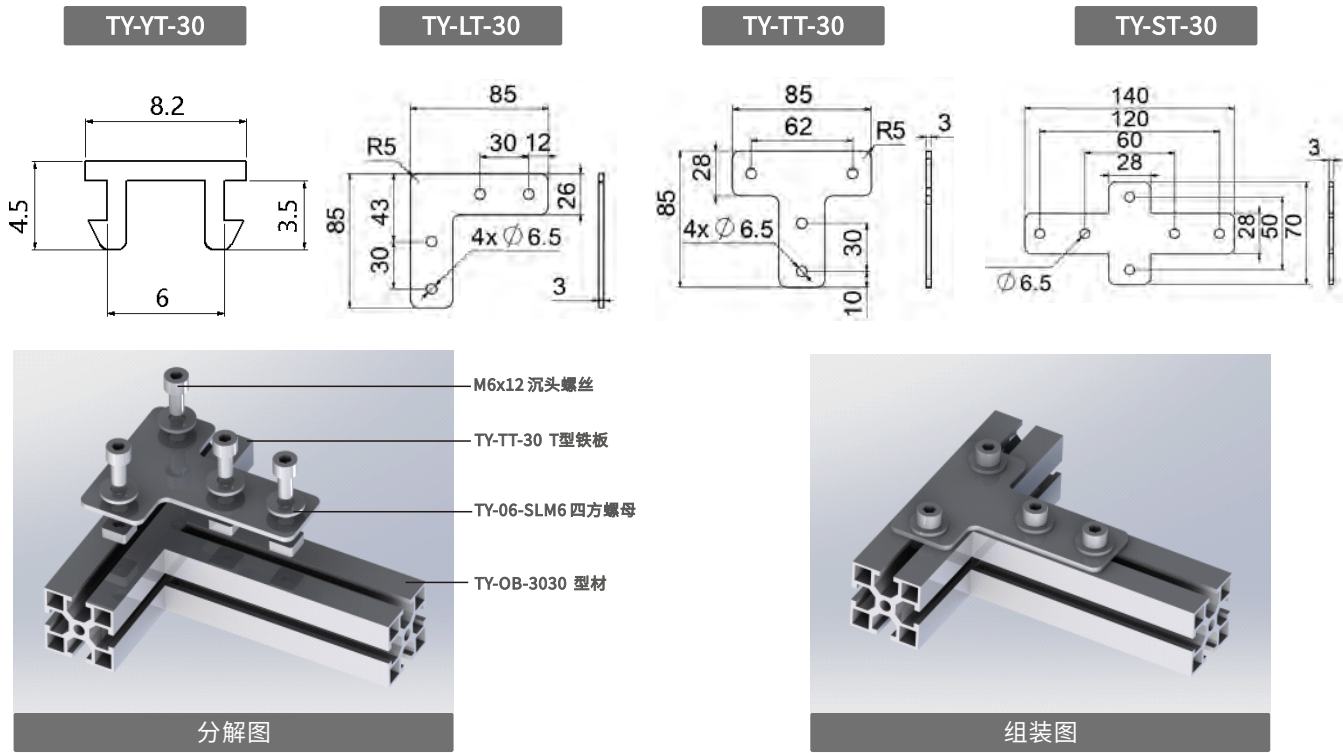




TY-30-NL 内置连接件

Usage: Used for high strength connection of L-shaped structure and T-shaped structure profiles
Material: carbon steel Finish:nicked-plated

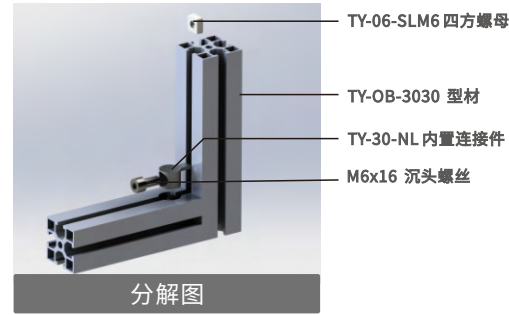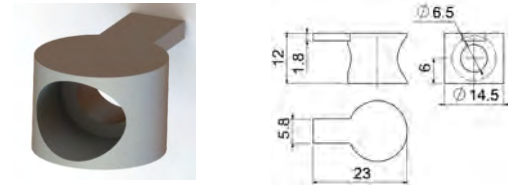

TY-OB-30-YL 一字连接件-两孔/三孔

Usage : Used for high strength connection of profiles
Material:carbon steel Finish: nicked-plated

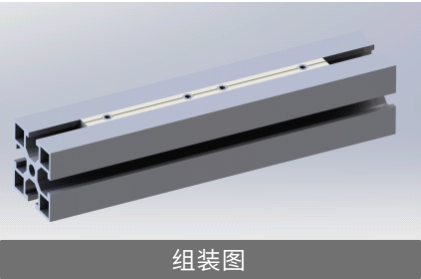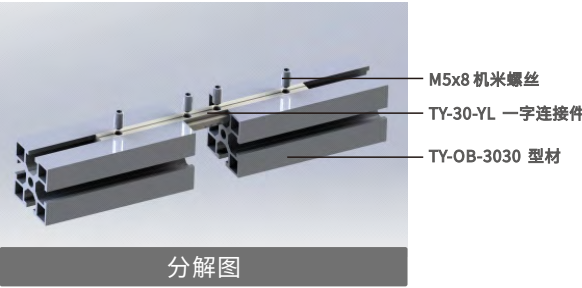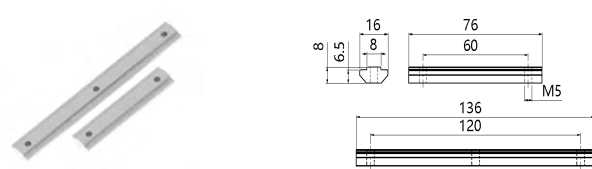

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

欧标30系列型材配件
连件部分


European standard 30 series profile accessories

压铸连接件 Angle Bracket

Usage: For 90 degree connections between profile

Material: Zinc alloy

Color: nicked-plated

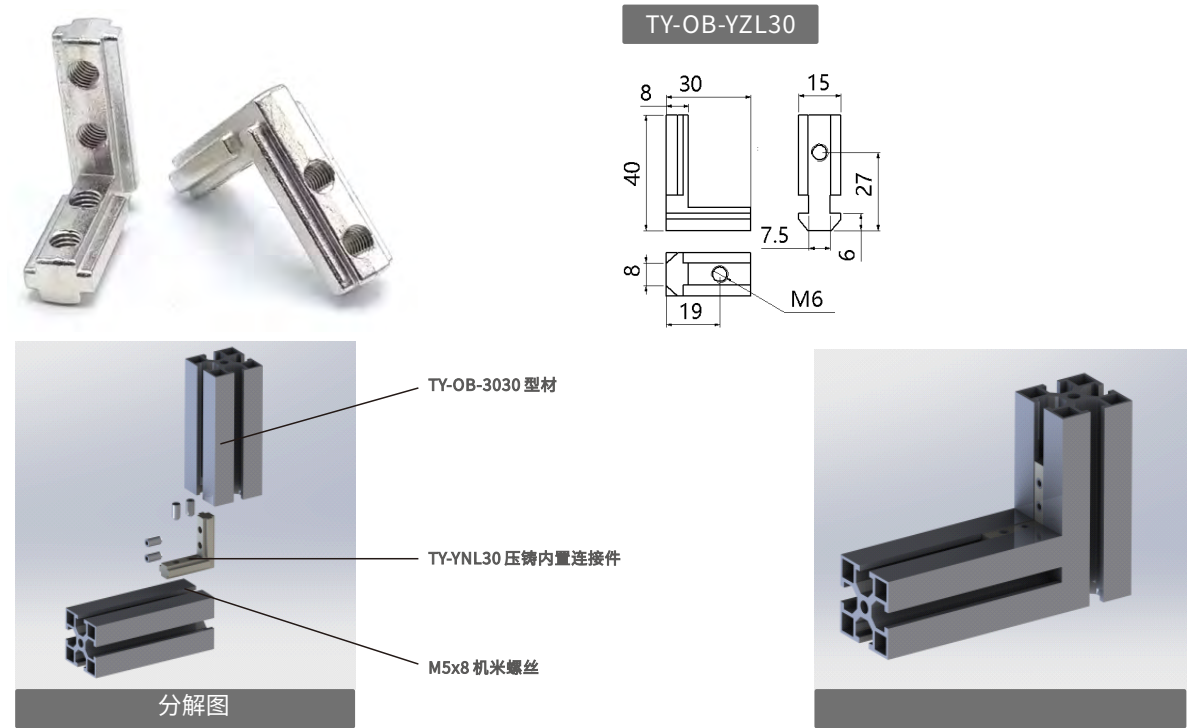


脚杯连接板

Usage: For Connection between profiles and foot cup



Material: Cost aluminium

Finish: Painting

TY-OB-3060-M12LB

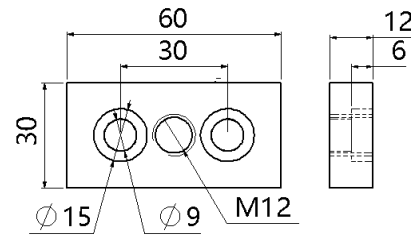

TY-OB-30-M8GJ

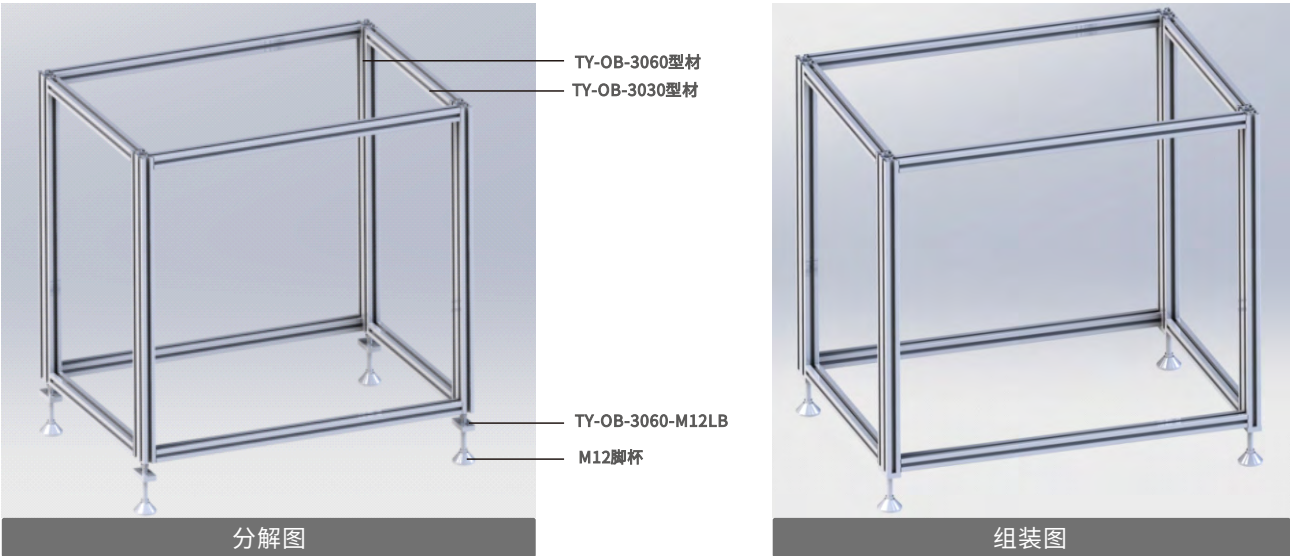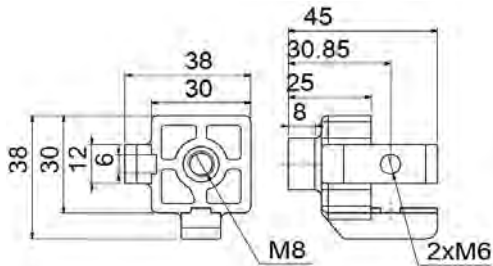

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material, Subject to the actual size!

欧标30系列型材配件
紧固部分

European standard 30 series profile accessories


T型压铸螺母

Usage: Special nuts for assembling profiles, and use when overloading or missing loading

Material: carbon steel

Finish: nicked-plated

TY-OB-06-YTLM4/M5/M6

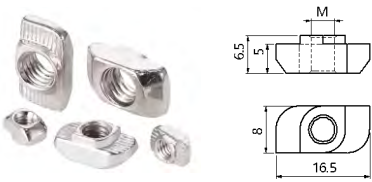


弹珠螺母

Usage: The profile is connected with the fixed surface to prevent the nut from loosening and can be placed outside

Material: carbon steel

Finish: nicked-plated

TY-06-SLM4/M5/M6

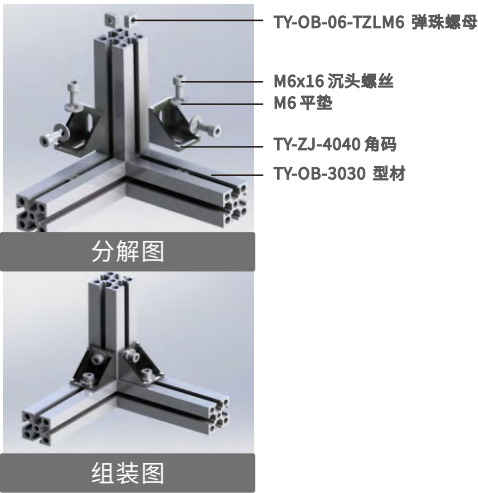


半圆螺母 Half round Nut

Usage: Special nuts for assembling profiles, and use when overloading or missing loading

Material: carbon steel

Finish: nicked-plated

TY-06-BLM5/M6

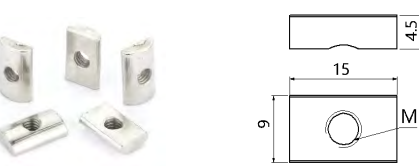



中标T型螺母 Slide-in T-nut

Usage: For high strength connection between profiles and connectors

Material: carbon steel

Finish: nicked-plated

TY-OB-06-TLM4/M5/M6

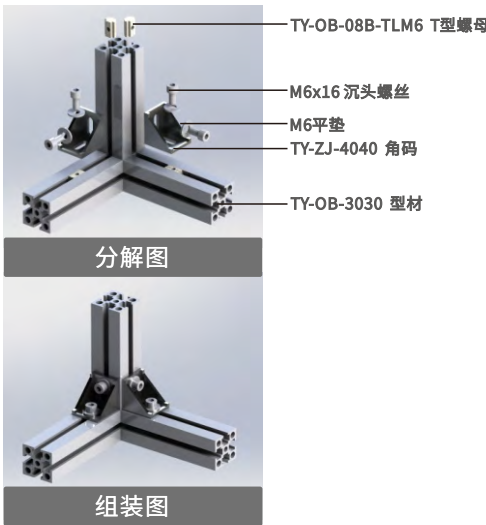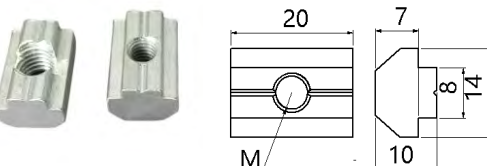

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material, Subject to the actual size!

欧标30系列型材配件


European standard 30 series profile accessories

紧固部分


菱形螺母Diamond Nut

Usage: Special nuts for assembling profiles, and use when overloading or missing loading **Material:** PVC **Color:**transparent

TY-06-LLM4/M5/M6

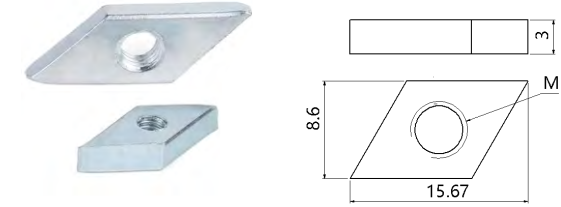

使用示例

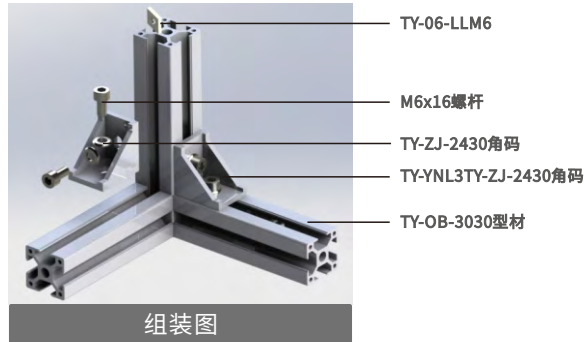

组装图





分解图

锤头螺杆Hammer Screw

Usage: The profile is connected with the fixed surface to prevent the nut from loosening and can be placed outside **Material:**carbon steel **Finish:**nicked-plated

TY-OB-CLM6-16/20

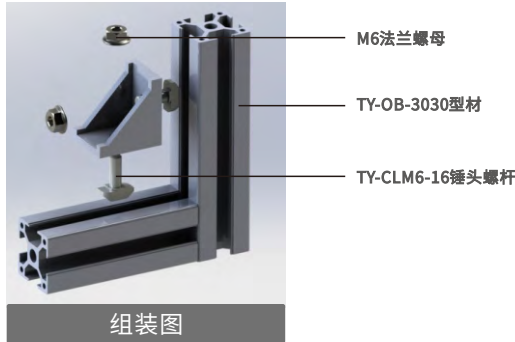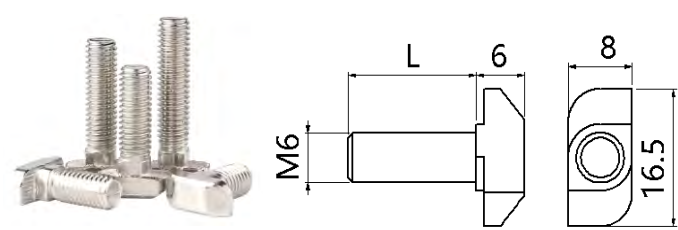

组装图




分解图


TY-JGG3040 间隔连接块Connector

Usage: For the fixation of organic glass or other sealing plates, insert the fixing block into the profile groove and fix the corresponding plate with screws **Material:** PVC **Color:**transparent

TY-OB-JGG30



使用示例

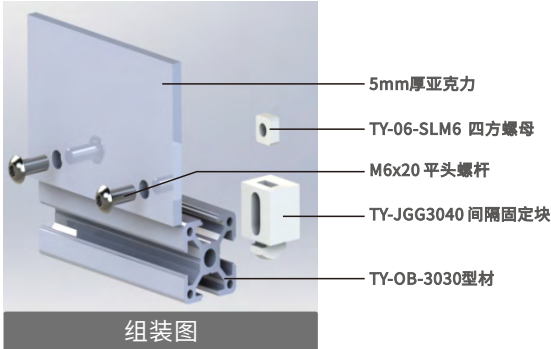

组装图



分解图


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

TENYUM Aluminum, Empowering a better life




TY-OB-40 欧标铝型材 40 series European standard aluminum profile

TY-OB-8-4040




参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	2.04kg/m 6m/支
集合惯性 Mass of Inertia	Ix:11.66cm ⁴ Iy:11.66cm ⁴
截面惯性 Section Moduius	Zx: 5.83cm ³ Zy: 5.83cm ³

TY-OB-8-4040-2



参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	1.32kg/m 6m/支
集合惯性 Mass of Inertia	Ix:7.73cm ⁴ Iy:7.73cm ⁴
截面惯性 Section Moduius	Zx: 5.83cm ³ Zy: 5.83cm ³

TY-OB-8-4040-3





参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	1.25kg/m 6m/支
集合惯性 Mass of Inertia	Ix:7.11cm ⁴ Iy:7.11cm ⁴
截面惯性 Section Moduius	Zx: 3.55cm ³ Zy: 3.55cm ³

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


40 series European standard aluminum profile

TY-OB-8-4040-4




参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	1.09kg/m 6m/支
集合惯性 Mass of Inertia	Ix:7.31cm ⁴ Iy:7.31cm ⁴
截面惯性 Section Moduius	Zx: 3.65cm ³ Zy: 3.65cm ³

TY-OB-8-4040-5



参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	1.31kg/m 6m/支
集合惯性 Mass of Inertia	Ix:7.73cm ⁴ Iy:7.73cm ⁴
截面惯性 Section Moduius	Zx: 3.86cm ³ Zy: 3.86cm ³

TY-OB-8-4040-6




参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	2.04kg/m 6m/支
集合惯性 Mass of Inertia	Ix:11.66cm ⁴ Iy:11.66cm ⁴
截面惯性 Section Moduius	Zx: 5.83cm ³ Zy: 5.83cm ³


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

TY-OB-40 欧标铝型材 40 series European standard aluminum profiles


TY-OB-8-4040-7

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/国标银白
单位质量 Weight	1.42kg/m 6m/支
集合惯性 Mass of Inertia	Ix: 7.76cm ⁴ Iy: 7.76cm ⁴
截面惯性 Section Moduius	Zx: 3.88cm ³ Zy: 3.88cm ³

TY-OB-8-4040-8

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/国标银白
单位质量 Weight	1.54kg/m 6m/支
集合惯性 Mass of Inertia	Ix: 9.31cm ⁴ Iy: 9.31cm ⁴
截面惯性 Section Moduius	Zx: 4.65cm ³ Zy: 4.65cm ³


TY-OB-8-4080

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/国标银白
单位质量 Weight	3.57kg/m 6m/支
集合惯性 Mass of Inertia	Ix: 21.25cm ⁴ Iy: 84.56cm ⁴
截面惯性 Section Moduius	Zx: 10.62cm ³ Zy: 42.28cm ³


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material, Subject to the actual size!

40 series European standard aluminum profile


TY-OB-8-4080-2

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/国标银白
单位质量 Weight	2.30kg/m 6m/支
集合惯性 Mass of Inertia	Ix: 14.40cm ⁴ Iy: 54.57cm ⁴
截面惯性 Section Moduius	Zx: 7.20cm ³ Zy: 27.28cm ³

TY-OB-8-4080-3

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/国标银白
单位质量 Weight	2.31kg/m 6m/支
集合惯性 Mass of Inertia	Ix: 14.47cm ⁴ Iy: 54.57cm ⁴
截面惯性 Section Moduius	Zx: 7.20cm ³ Zy: 27.28cm ³


TY-OB-8-4080-4

 	
参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/国标银白
单位质量 Weight	2.31kg/m 6m/支
集合惯性 Mass of Inertia	Ix: 14.47cm ⁴ Iy: 54.56cm ⁴
截面惯性 Section Moduius	Zx: 7.23cm ³ Zy: 27.28cm ³

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material, Subject to the actual size!



TY-OB-40 欧标铝型材 40 series European standard aluminum profile

TY-OB-8-4080-5




参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	3.57kg/m 6m/支
集合惯性 Mass of Inertia	Ix:21.25cm ⁴ Iy:84.56cm ⁴
截面惯性 Section Moduius	Zx: 10.62cm ³ Zy: 42.28cm ³

TY-OB-8-8080



参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	4.33kg/m 6m/支
集合惯性 Mass of Inertia	Ix:114.16cm ⁴ Iy:114.16cm ⁴
截面惯性 Section Moduius	Zx: 57.08cm ³ Zy: 57.08cm ³

TY-OB-8-8080-2




参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	5.24kg/m 6m/支
集合惯性 Mass of Inertia	Ix:133.02cm ⁴ Iy:133.02cm ⁴
截面惯性 Section Moduius	Zx: 66.51cm ³ Zy: 66.51cm ³

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


40 series European standard aluminum profile

TY-OB-8-8080-3




参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	4.57kg/m 6m/支
集合惯性 Mass of Inertia	Ix:116.09cm ⁴ Iy:116.09cm ⁴
截面惯性 Section Moduius	Zx: 58.04cm ³ Zy: 58.04cm ³

TY-OB-8-8080-4



参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	5.24kg/m 6m/支
集合惯性 Mass of Inertia	Ix:133.02cm ⁴ Iy:133.02cm ⁴
截面惯性 Section Moduius	Zx: 66.51cm ³ Zy: 66.51cm ³

TY-OB-8-8080-5






参数 PARAMETER	
材料 Material	铝 Aluminum(6063) 喷砂电泳/ 国标银白
单位质量 Weight	5.14kg/m 6m/支
集合惯性 Mass of Inertia	Ix:133.05cm ⁴ Iy:133.05cm ⁴
截面惯性 Section Moduius	Zx: 66.52cm ³ Zy: 66.52cm ³


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

欧标40/50系列型材配件 European standard 40/50 series profile accessories
附件部分

端盖 Cap Usage: Coverthe exposed end of the profile bracket, dustproof, beautiful Material: Plastic Color:black

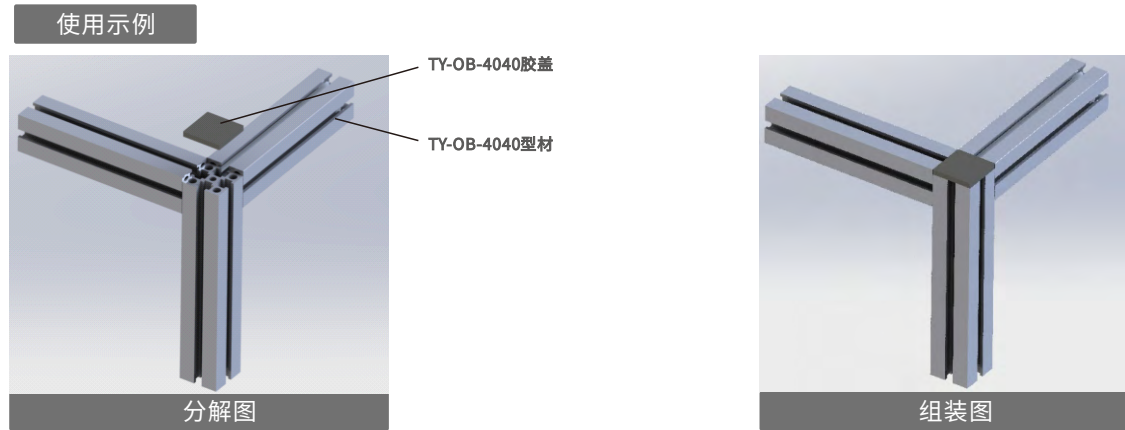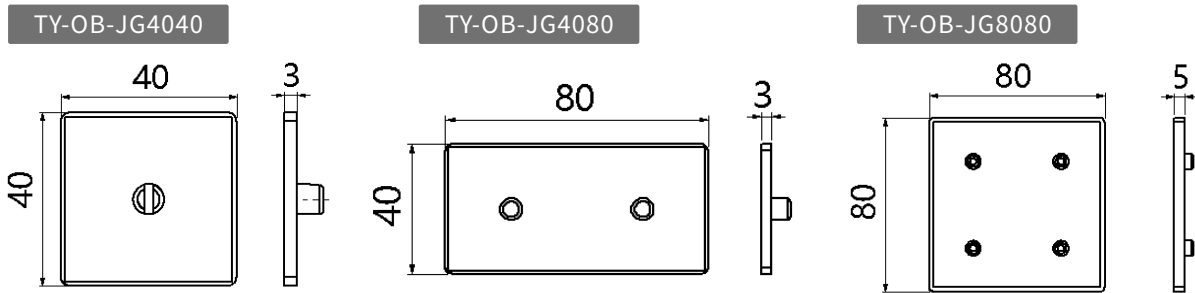

密封条 Sealing strip Usage: For profile surface decorationeasy to clean, dustproof Material:PVC Color: Black, gray, blue, Champagne

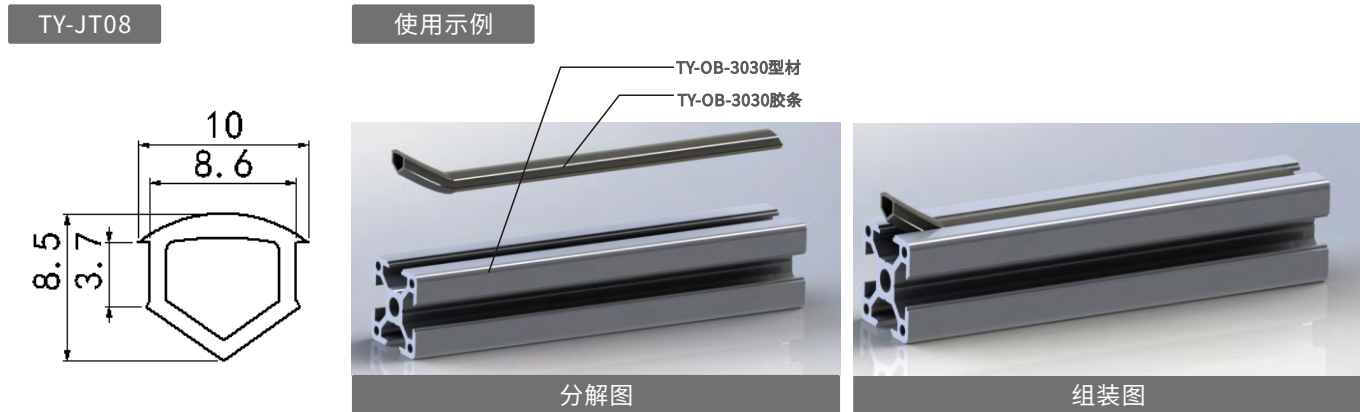


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

欧标40/50系列型材配件 European standard 40/50 series profile accessories


硬质胶条 Hard strip

Usage: For profile surface decoration, easy to clean, dustproof, flat Material:PVC Color: Black, gray

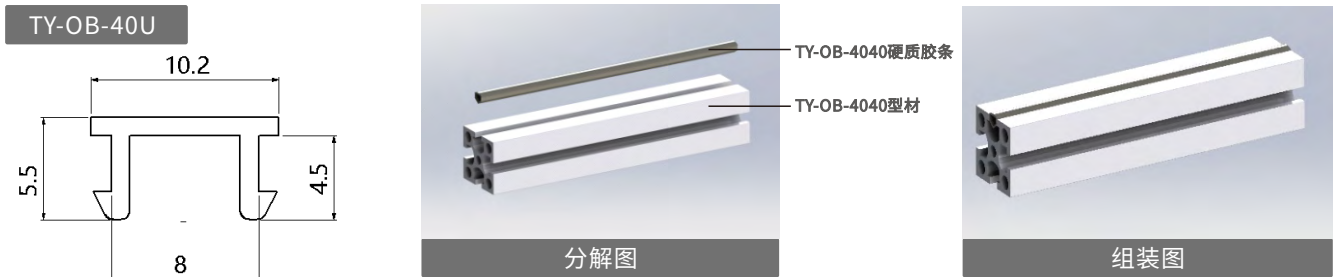

面板压条Panel card strip


Usage :Fixation of organic glass or other plates Material:PE Color: light gray

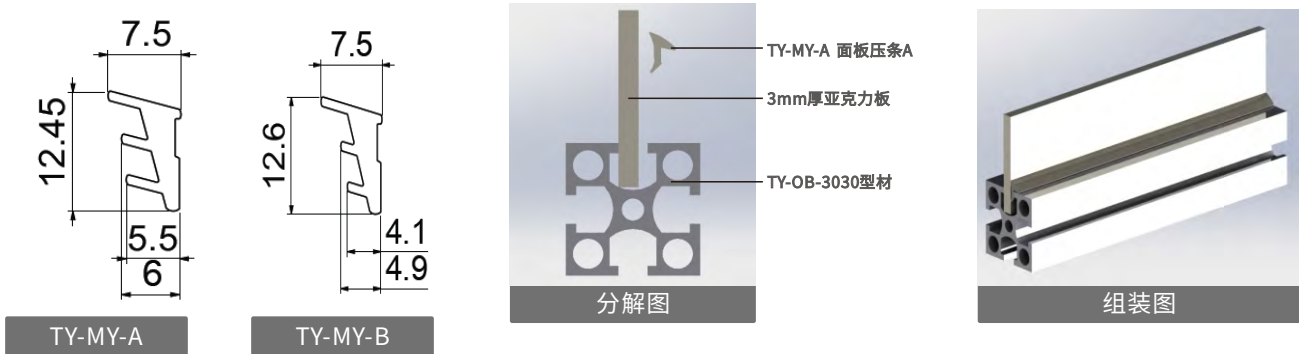

角码Bracket

Usage:connection of profiles to profiles and be used for the connection of profiles that need to be moved

Material: Castaluminum 6063 aluminum alloy Finish: Sand blast oxidation

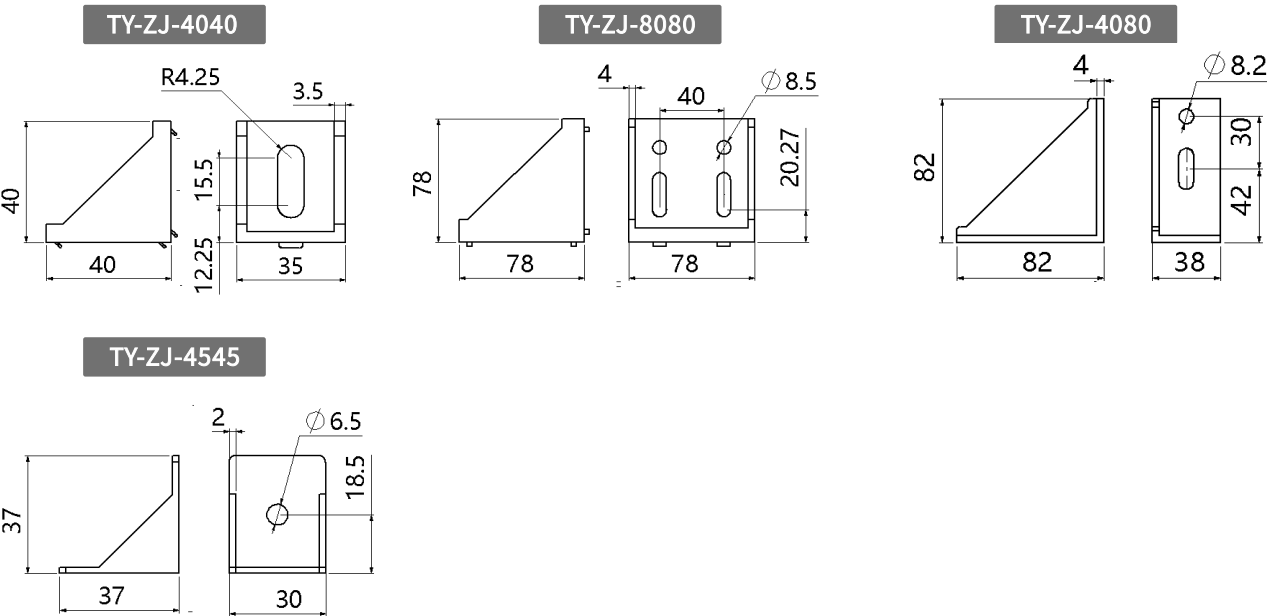


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

欧标40/50系列型材配件 European standard 40/50 series profile accessories

连接部分Connector

角码Bracket


使用示例

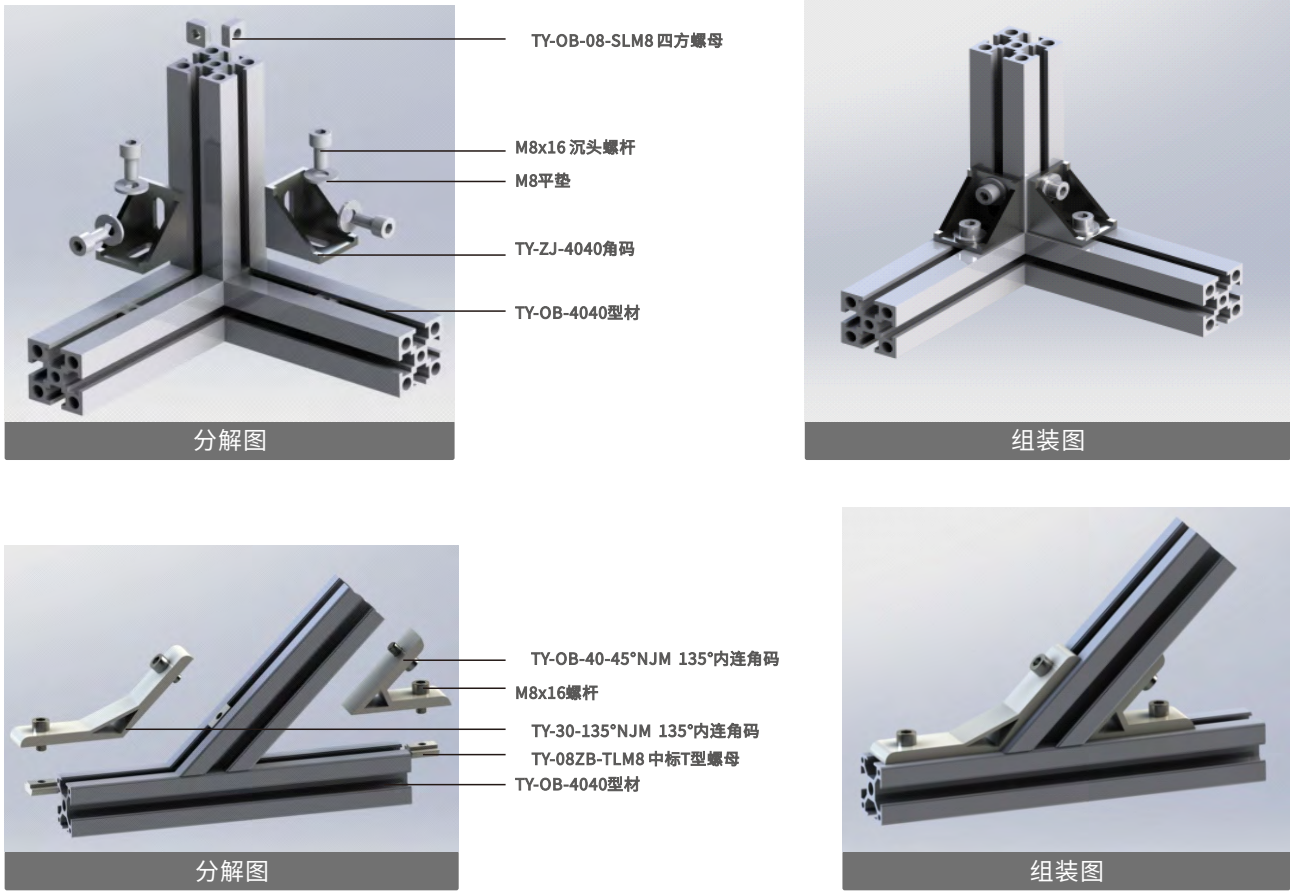

欧标40/50系列型材配件 European standard 40/50 series profile accessories


角度固定板Angle connector

Usage: Used for high strength connection of L-shaped structure and T-shaped structure profiles
Material:carbon steel Finish: nicked-plated

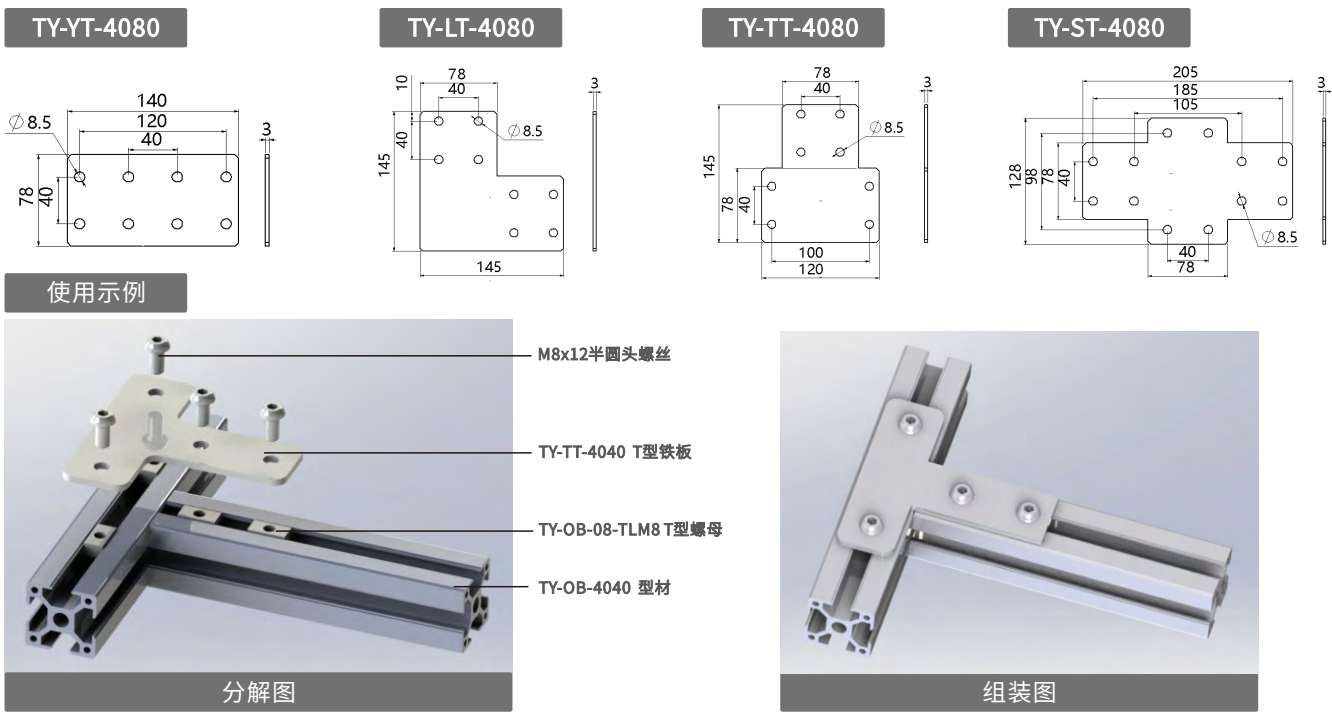


角度固定板Angle connector

Usage: Used for high strength connection of L-shaped structure and T-shaped structure profiles
Material: Carbon steel Finish: nicked-plated


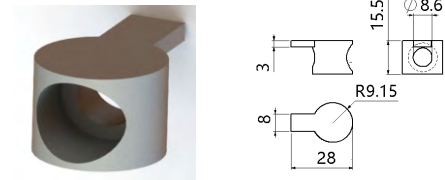


角度固定板Angle connector



Usage:For high strength connection of profiles
Material:carbon steel Finish: nicked-plated

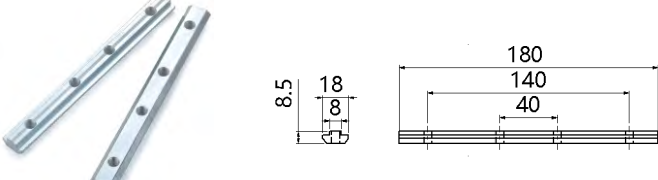

密封条 Sealing strip Usage: For profile surface decoration ,easy to clean, dustproof Material:PVC Color:Black, gray, blue, Champagne

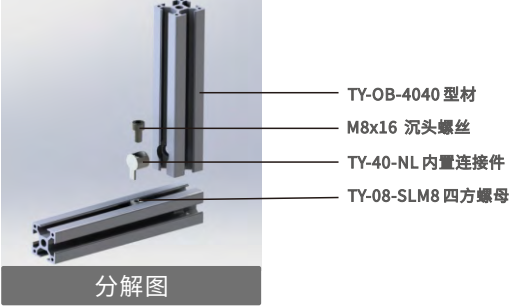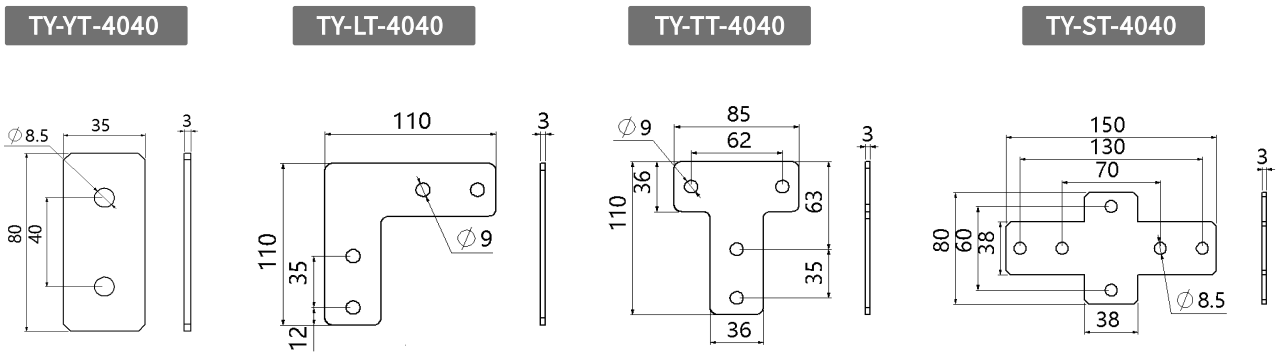

使用示例

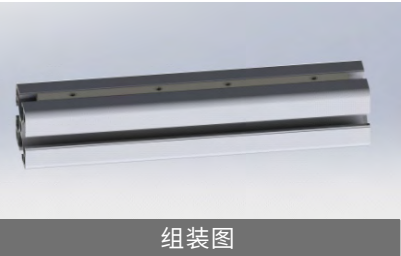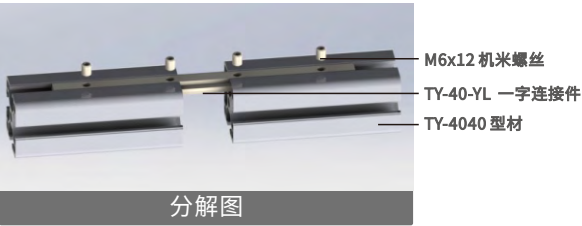


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

欧标40/50系列型材配件 European standard 40/50 series profile accessories
连件部分

压铸连接件 Usage: For 90 degree connections between profiles Material: Zinc alloy Color:nicked-plated

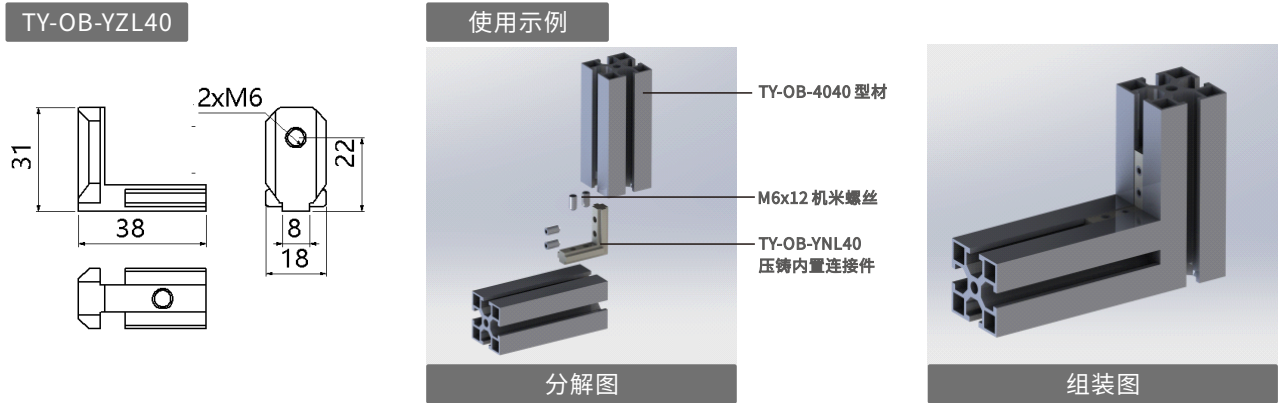

脚杯连接板 Usage: For Connection between profiles and foot cup Material:Cast aluminium Finish:Painting

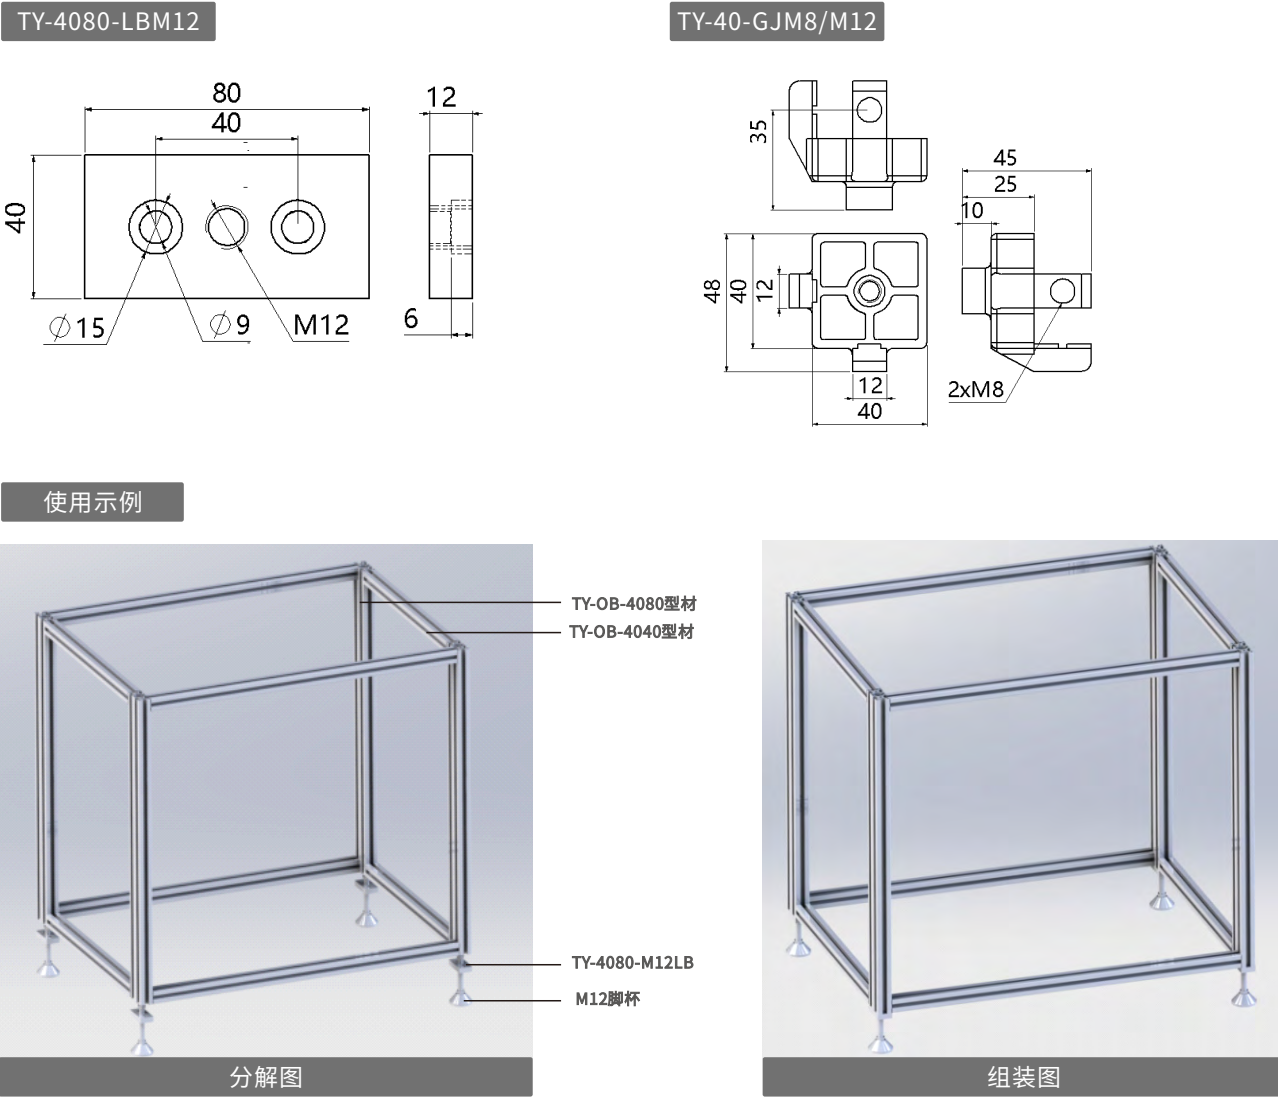

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

欧标40/50系列型材配件 European standard 40/50 series profile accessories
紧固部分

T型螺母

Usage: Special nuts for assembling profiles, and use when overloading or missing loading Material:carbon steel Finish:nicked-plated



半圆螺母

Usage:Special nuts for assembling profiles, and use when overloading or missing loading Material:carbon steel Finish: nicked-plated



*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


四方螺母

Usage: The regularnut for assembling profiles has a large contact surface with the notch of profiles and is not easy to deform Material:carbon steel Finish:nicked-plated



中标T型螺母

Usage: For high strength connection between profiles and connectors Material:carbon steel Finish: nicked-plated

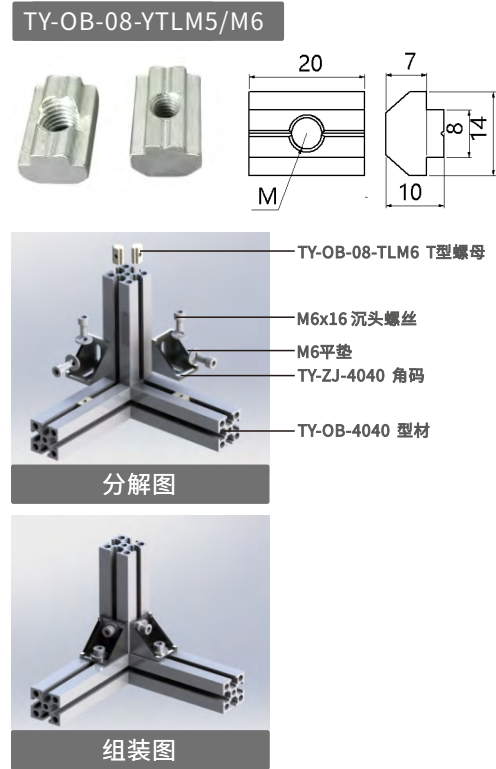

欧标40/50系列型材配件 European standard 40/50 series profile accessories
紧固部分



菱形螺母Diamond Nut

Usage: Special nuts for assembling profiles, and use when overloading or missing loading
Material:PVC Finish:transparent

TY-08-LLM4/M5/M6




使用示例

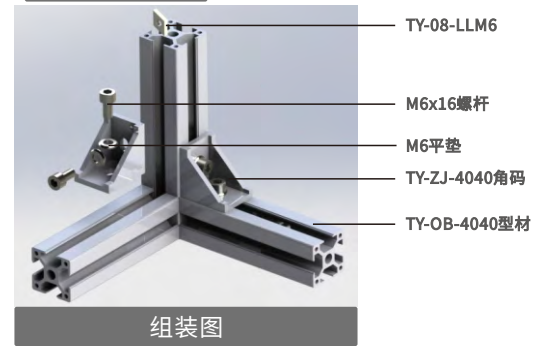


TY-JGG3040 间隔连接块 Connector

Usage: For the fixation of organic glass or other sealing plates, insert the fixing block into the profile groove and fix the corresponding plate with screws
Material: PVC Color :transparent

TY-OB-JGG30






使用示例

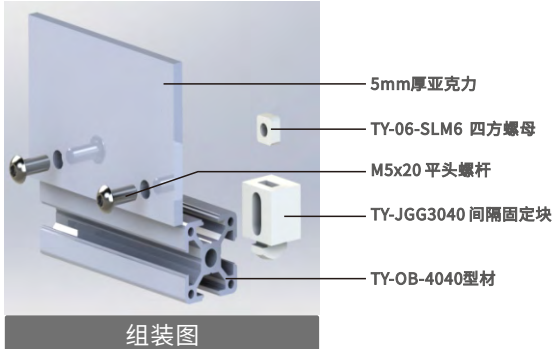

锤头螺杆 Hammer Screw

Usage: The profile is connected with the fixed surface to prevent the nut from loosening and can be placed outside
Material: Carbon steel Finish: nicked-plated

TY-OB-CLM8-16/20/25

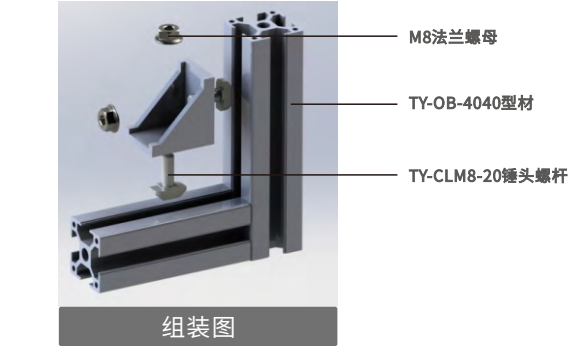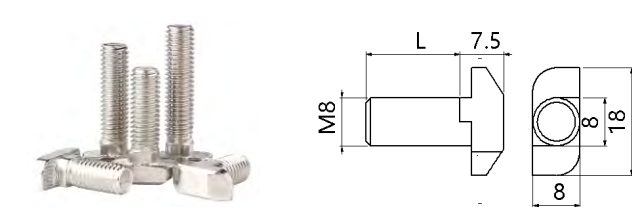

TENYUM Aluminum, Empowering a better life




型材通用配件

Profile universal accessories

紧固部分Fastening

内六角杯头螺杆 Hexagon socket head cap screw

Type	Material	Finish
Screw	Carbon steel	Nicke-plated

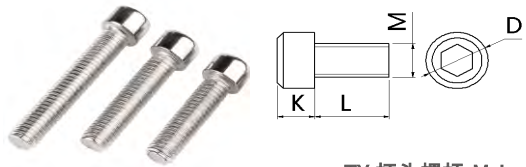


TY-杯头螺杆-M-L

规格参数Specification

Item		L	D	K
Product Name	M			
TY-socket head cap screw	M4	16	5.5	4
		10	8.5	5
	M5	12		
		16		
	M6	10	10	6
		12		
		16		
		20		
		25		
		30		
		35		
	M8	12	12	8
		16		
		20		
		25		
		30		
		40		
		50		

平头内六角螺杆 Flat head hexagon screw

Type	Material	finish
Screw	Carbon steel	Nicke plated

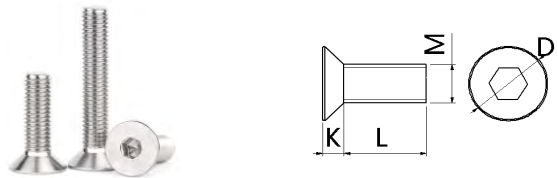


TY-平头内六角螺杆-M-L

Item		L	D	K
Product Name	M			
TY-Flat head hex screw	M6	12	12	3.5
		25		
		30		
	M8	16	16	4.5
		25		
		25		

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

内六角半圆头螺杆 Hexagon socket button head screws

Type	Material	finish
Screw	Carbon steel	Nicke-plated

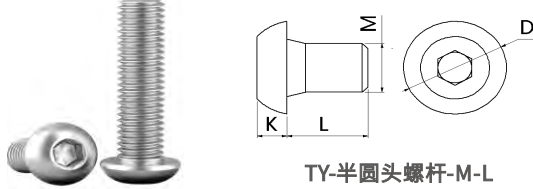


TY-半圆头螺杆-M-L

规格参数Specification

Item		L	D	K
Product Name	M			
TY-button head screws	M4	5	7.6	2.2
		10		
	M5	12	9.5	2.8
		16		
	M6	12	10.5	3.5
		20		
	M8	16	14	4.5
		20		
		30		
		40		
		50		
		50		

圆头内六角螺杆Round head hexagon screw

Type	Material	finish
Screw	Carbon steel	Nicke plated

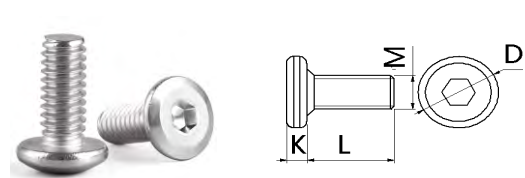

TY-圆头内六角螺杆-M-L


Item		L	D	K
Product Name	M			
TY-Round head hex screw	M6	12	11	2.8
		16		
		20		
		25		
		30		
		30		

型材通用配件

Profile universal accessories

组合内六角杯头螺杆Combined hexagon cup screw

Type	Material	finish
Screw	Carbon steel	Nicke-plated

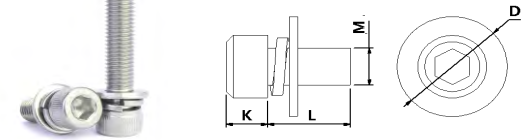


TY-组合杯头内六角螺杆-M-L

规格参数Specification

Item		L	D	K
Product Name	M			
TY-Combined hexagon cup screw	M5	12	8.5	5
	M6	16	10	6
		18	12	8
	M8	18	12	8

平垫Flat gasket

Type	Material	finish
Gasket	Carbon steel	Zinc-plated



TY-普通垫片-D


规格参数Specification

Item		d	D	T
Product Name	M			
GY-Universal	6	6.4	12	1
Gasket	8	8.4	15	1

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

内六角机米螺杆Hexagon grub screw

Type	Material	finish
Screw	Carbon steel	Nicke-plated



TY-半圆头螺杆-M-L

规格参数Specification

Item		L	D	K
product Name	M			
TY-Grub screw	M4	8	\	\
	M5	8	\	\
		8	\	\
	M6	12	\	\
		12	\	\
	M8	12	\	\

弹垫Spring washer

Type	Material	finish
Gasket	Carbon steel	Zinc-plated



TY-普通弹垫-D

规格参数Specification

Item		d	D	T
Product Name	M			
GY-Universal Gasket	6	6.4	12	1
	8	8.4	15	1

型材通用配件


Profile universal accessories

门框配件 Door accessories




门阻Door stop

用途: 用于门窗的定位 Purpose: Used for the positioning of doors and windows
用法: 装入型材内, 放置螺母用螺杆固定 Usage: Put it into the profile, place the nut and fix it with a screw


Type	Material	Finish
Door stop	Carbon steel	Nicke-plated

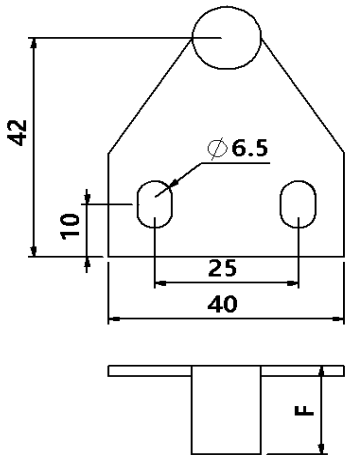

TY-40长门阻-F25

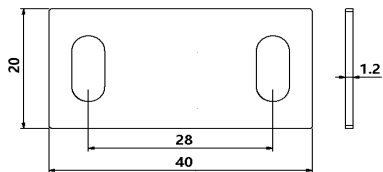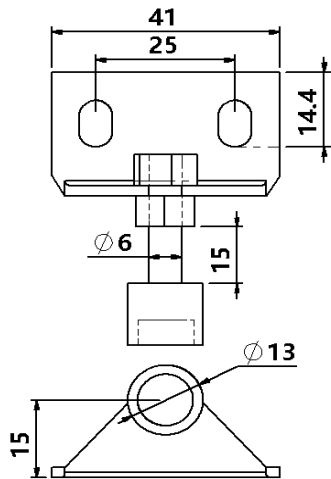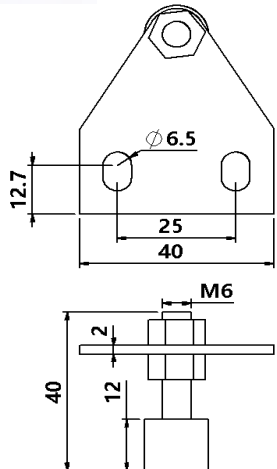


TY-Square iron sheet

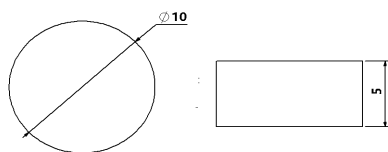

Strong magnet

使用示例

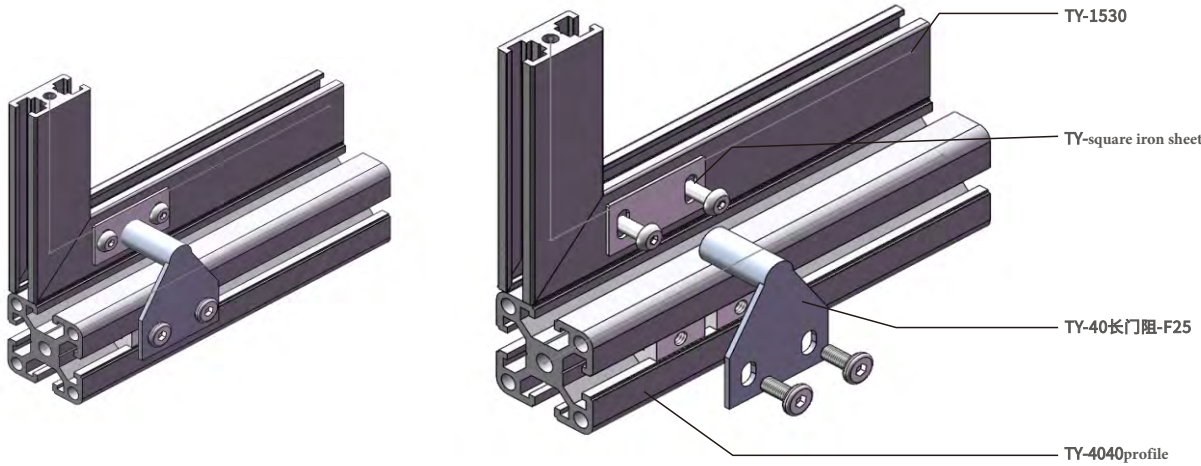

*图纸尺寸为参考资料, 具体以实物尺寸为准!
Drawing size is reference material, Subject to the actual size!


型材通用配件

Profile universal accessories


门吸Door stopper

用途: 用于门窗的定位与吸合 Purpose: Used for positioning and closing of doors and windows
用法: 安装于型材门内侧, 根据型材尺寸选择定位板配合使用 Usage: Installed on the inside of the profile door, and select the positioning plate according to the size of the profile


type	Material	Color
Door stop A	Stainless steel	Silver




TY-Door stop A



adsorption plate

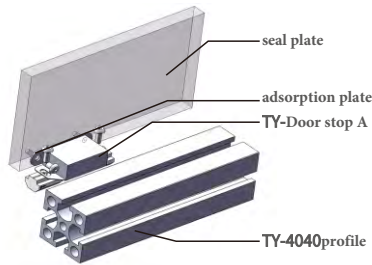

分解图

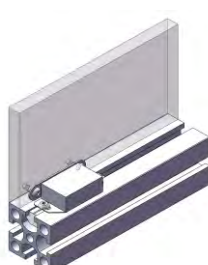


组装图


门吸Door stopper

用途: 用于门窗的定位与吸合 Purpose: Used for positioning and closing of doors and windows
用法: 安装于型材门内侧, 根据型材尺寸选择定位板配合使用 Usage: Installed on the inside of the profile door, and select the positioning plate according to the size of the profile

Type	Material	Color
Door stop A	Carbon steel	Chromeplate






TY-MXBDB-T0



TY-MXBDB-T5

TY-MXBDB-T10

TY-MXBDB-T15

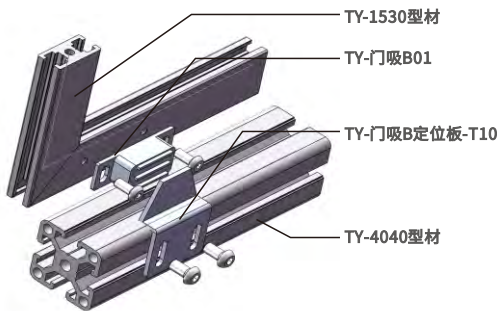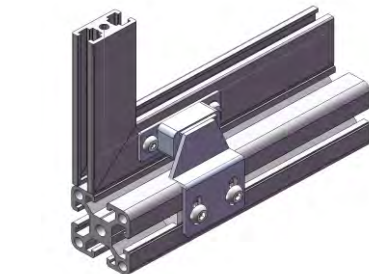

规格参数Specification

Item		usable range
Name	T/厚度	
TY-MXBDB	0	Used when the width difference between the door outer frame profile and the door inner frame profile is 15mm
TY-MXBDB	5	Used when the width difference between the door outer frame profile and the door inner frame profile is 10/20mm
TY-MXBDB	10	Used when the width difference between the door outer frame profile and the door inner frame profile is 5/25mm
TY-MXBDB	15	Used when the width difference between the door outer frame profile and the door inner frame profile is 30mm

*图纸尺寸为参考资料, 具体以实物尺寸为准!
Drawing size is reference material, Subject to the actual size!




型材通用配件

Profile universal accessories


门框配件 Door accessories

固定型铝合金合页 Fixed aluminum alloy hinge 锥孔型Cone hole


Code	Type	Material	Finish
TY-AB5-AL12	AB5	Aluminium alloy	Sandblasted bright silver



TY-AB5-AL12-6263
TY-AB5-AL12-6263A
TY-AB1-AL12-4847A



TY-AB5-AL12-6279
TY-AB5-AL12-6279A

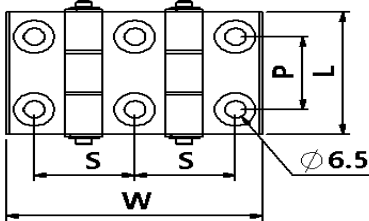




TY-AB5-AL12-7947
TY-AB5-AL12-10463
TY-AB5-AL12-9047
TY-AB5-AL12-9760

规格参数Specification

Code	Type	Specification	W	L	P	S	T
TY-AB5-AL12	AB5	6263	62	63	37	36	4.3
		6263A	62	63	37	42	
		4847A	48	47	30	31	
		6279	62	79	56	36	
		6279A	62	79	56	42	
		7947	79	47	28	31	
		10463	104	63	37	31	
		9047	90	47	28	36	
		9760	97	60	37	37	

固定型铝合金合页 Fixed aluminum alloy hinge 腰孔型 kidney-shaped hole

Code	Type	Material	Finish
TY-AB5-AL12	AB5	Aluminium alloy	Sandblasted bright silver



订货型号:TY-AB5-AL12-6247

Item		
Code	L	W
Y-AB5-AL12	62	47
		63

规格参数Specification

Code	Type	Specification	W	L	P	S	T
TY-AB5-AL12	AB5	6247	62	47	28	36	4.3
		6263B	62	63	37	36	
		6279B	62	79	56	36	




*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件

Profile universal accessories

不锈钢合页 Stainless steel hinge

Code	Type	Material	Finish
TY-AB1-SUS02	AB1	Stainless steel	Polishing



订货型号:TY-AB5-AL12-6247





Item		
Type	L	W
TY-AB1-SUS02	40	40
	50	50

规格参数Specification

Code	Type	Specification	W	L		S	T	H
TY-AB1-SUS02	AB1	4040	40	40	25	25	5	9.5
		5050	50	50	30	30		11
		6060	58	60	36	36	8	12.5

不锈钢合页 Stainless steel hinge

Code	Type	Material	Finish
GY-AB2-SUS02	AB2	Stainless steel	Polishing



订货型号:TY-AB2-SUS02-5050

Item		
Code	L	W
TY-AB1-SUS02	40	40
TY-AB1-SUS02	50	50

规格参数Specification

Code	Type	Specification	W	L		S	T	H
TY-AB2R-SUS02	AB2R AB2L	5050	50	50	20	35	5	10.5
		6565	65	65	35	40	5	10.5
		7575	75	75	40	49	6	12
TY-AB2L-SUS02		100100	100	100	60	60	6	12

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!




型材通用配件

Profile universal accessories

合页Hinges

铸造不锈钢合页Cast stainless steel hinge

Code	Type	Material	Finish
TY-AB3-SUS02	AC1	Aluminum alloy	Sandblasted bright silver

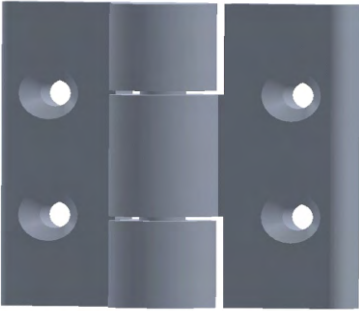

订货型号:TY-AB5-AL12-6247




Item		
Code	L	W
TY-AB1-SUS02	50	50
	65	65

规格参数Specification

Code	Type	W	L	P	d	T	H
TY-AB3-SUS02	AB3	50	50	20	35	4.6	5.2
		65	65	35	40	5.6	5.2
		75	75	40	50	6.6	6.5

锌合金合页Zinc alloy hinge

Code	Type	Material	Finish
TY-AB4-ZN10	Ab4	Zinc alloy	Painting



订货型号:TY-AB4-ZN10-4250

Item		
Code	L	W
Y-AB4-ZN10	50	42
	55	50

规格参数Specification

Code	Type	W	L	P	S	d	T
TY-AB4-ZN10	AB4	42	50	30	23	5.5	6.5
		50	50	30	32	6.5	6.5
		62	50	30	41	6.5	6.5
		80	76	40	46	8.5	6.5




*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件

Profile universal accessories

不锈钢合页 Stainless steel hinge

Code	Type	Material	Finish
TY-AB1-SUS02	AB1	Stainless steel	Polishing



订货型号:TY-AB4-SUS02-5050



Item		
Type	L	W
TY-AB4-ZN10	50	51
	65	65

规格参数Specification

Code	Type	W	L	P	S	d	T
TY-AB4-ZN10	AB4	37.5	30	14	20	5.3	4
		52	40	23	31	6.5	6
		63	44	44	40	6.5	6
		56	50	50	36	6.5	6

铝合金合页 Aluminum alloy hinge

Code	Type	Material	Finish
TY-AB5-AL10	AB5	Aluminum alloy	Painting
TY-AB5-AL05	AB5	Aluminum alloy	Black anodized
TY-AB5-AL10	AB5	Aluminum alloy	Silver painting



订货型号:TY-AB5-AL10-5050

Item		
Code	W	L
TY-AB5-AL10	50	50
TY-AB5-AL05	58	58
TY-AB5-AL10	58	58

规格参数

Code	Type	W	L	P	S	d	T
TY-AB5-AL10	AB5	58	50	30	30	6	6
TY-AB5-AL05		58	45	23	33	6	8
TY-AB5-AL10		58	45	23	23	6	8

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!



型材通用配件

Profile universal accessories

合页Hinges

锌合金合页 Zinc alloy hinge

Code	Type	Material	Finish
TY-AB4-ZN10	AB4	Zinc alloy	Painting

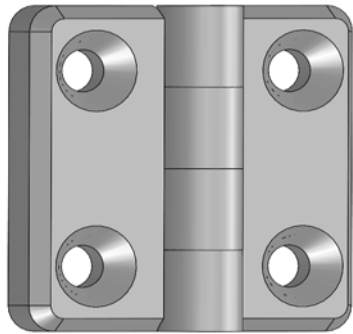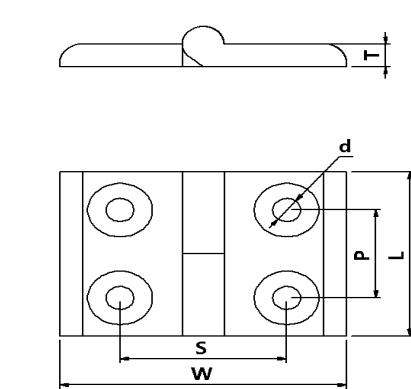



订货型号:TY-AB4-ZN10-6243

规格参数Specification

Code	Type	W	L	P	S	d	T
TY-AB4-ZN10	AB4	62	43	24	36	6.5	6

锌合金合页Zinc alloy hinge

Code	Type	Material	Finish
TY-AB4-ZN10	AB4	Zinc alloy	Painting

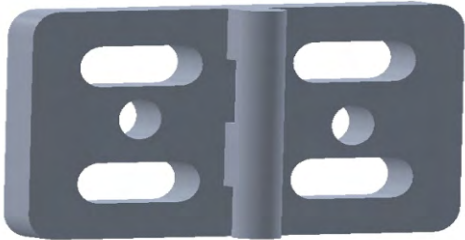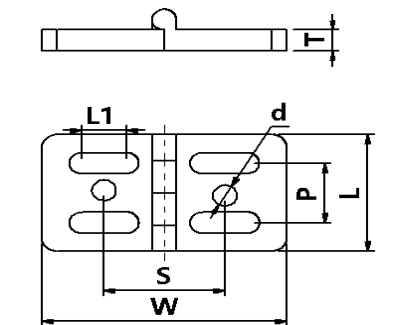

订货型号:TY-AB4-ZN10-4058

规格参数Specification

Code	Type	W	L	L1	P	S	d	T
TY-AB4-ZN10	AB4	80	45	15	21	41	8	8



*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件

Profile universal accessories

尼龙合页 Nylon hinge

Code	Type	Material	Color
TY-AB6-PA11	Ab6	Nylon	Blcak

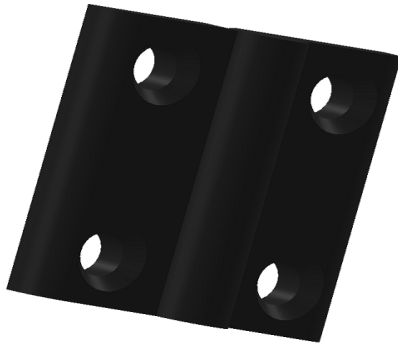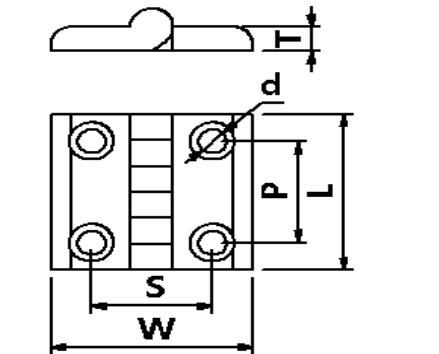

订货型号:TY-AB6-PA11-5050






item		
Code	L	W
TY-AB6-PA11	50	50
	58	58

规格参数Specifcatin

Code	Type	W	L	P	S	d	T
TY-AB6-PA11	AB6	49	47	30	29	7	9
		57	46	24	33	7	9
		60	49	30	39	8	9

挤压角码Bracket

Code	Type	Material	Finish
TY-AB4-ZN10	AB4	Aluminum ally	Anodize



规格参数Specification

Series	Type	W	L	D
20 Profile series	TY-20-35-5-14 A bracket	\	14	5.5
20 Profile series	TY-20-35-5-34 A bracket	20	34	5.5
20 Profile series	TY-20-35-5-54 A bracket	40	54	5.5
30 Profile series	TY-30-35-5-20 A bracket	\	20	6.5
30 Profile series	TY-30-35-5-50 A bracket	30	50	6.5
30 Profile series	TY-30-35-5-80 A bracket	60	80	6.5
40 Profile series	TY-40-35-5-30 A bracket	\	30	6.5
40 Profile series	TY-40-35-5-70 A bracket	40	70	6.5
40 Profile series	TY-40-35-5-110 A bracket	80	110	6.5
45 Profile series	TY-45-35-5-23 A bracket	\	35	5.5
45 Profile series	TY-45-35-5-80 A bracket	45	80	8.5
50/60 Profile series	TY-50-35-5-40 A bracket	\	40	8.5
50/60 Profile series	TY-50-35-5-90 A bracket	50	90	8.5

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!






型材通用配件

Profile universal accessories

角码Bracket

挤压角码 Bracket

Type	Material	Finish
Bracket	6063	Anodize

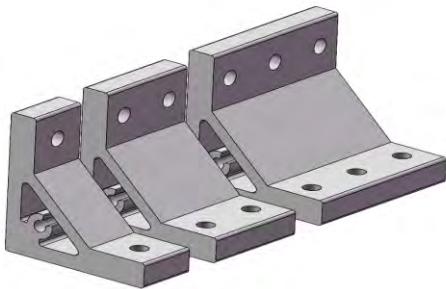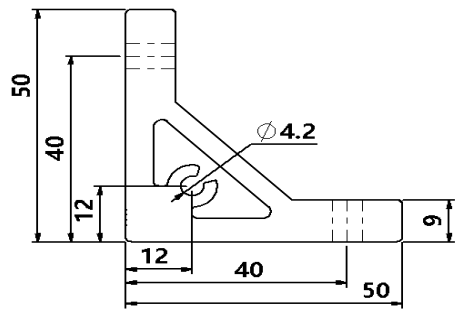

规格参数Specification

Series	Type	L	W	D
20 Profile series	TY-20-50-7-14 A bracket	14	\	5.5
20 Profile series	TY-20-50-7-34 A bracket	34	20	5.5
20 Profile series	TY-20-50-7-54 A bracket	54	40	5.5
30 Profile series	TY-30-50-7-20 A bracket	20	\	6.5
30 Profile series	TY-30-50-7-50 A bracket	50	30	6.5
30 Profile series	TY-30-50-7-80 A bracket	80	60	6.5
40 Profile series	TY-40-50-7-30 A bracket	30	\	6.5
40 Profile series	TY-40-50-7-70 A bracket	70	40	6.5
40 Profile series	TY-40-50-7-110 A bracket	110	80	6.5
45 Profile series	TY-45-50-7-35 A bracket	35	\	8.5
45 Profile series	TY-45-50-7-80 A bracket	80	45	8.5
50/60 Profile series	TY-50-50-7-40 A bracket	40	\	8.5
50/60 Profile series	TY-50-50-7-90 A bracket	90	50	8.5






*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件

Profile universal accessories

挤压角码Bracket

Type	Material	Finish
Bracket	6063	Anodize

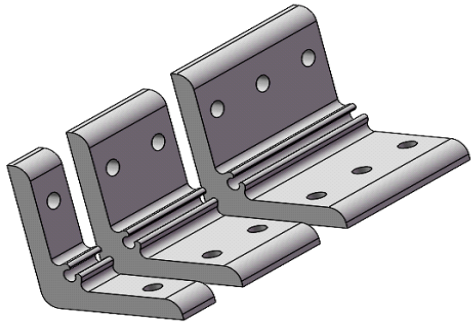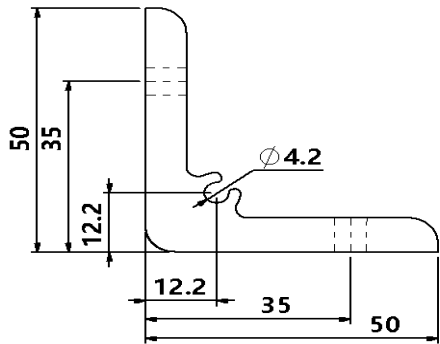

规格参数Specification

Series	Type	L	W	D
20 Profile series	TY-20-50-20 A bracket	20	\	5.5
20 Profile series	TY-20-50-35 A bracket	35	20	5.5
20 Profile series	TY-20-50-55 A bracket	55	40	5.5
30 Profile series	TY-30-50-30 A bracket	30	\	6.5
30 Profile series	TY-30-50-55 A bracket	55	30	6.5
30 Profile series	TY-30-50-85 A bracket	85	60	6.5
40 Profile series	TY-40-50-35 A bracket	35	\	8.5
40 Profile series	TY-40-50-75 A bracket	75	40	8.5
40 Profile series	TY-40-50-115 A bracket	115	80	8.5
45 Profile series	TY-45-50-40 A bracket	40	\	8.5
45 Profile series	TY-45-50-85 A bracket	85	45	8.5
50/60 Profile series	TY-50-50-45 A bracket	45	\	8.5
50/60 Profile series	TY-50-50-95 A bracket	95	50	8.5

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


型材通用配件

Profile universal accessories

角码Bracket

挤压角码Bracket

Type	Material	Finish
Bracket	6063	Anodize

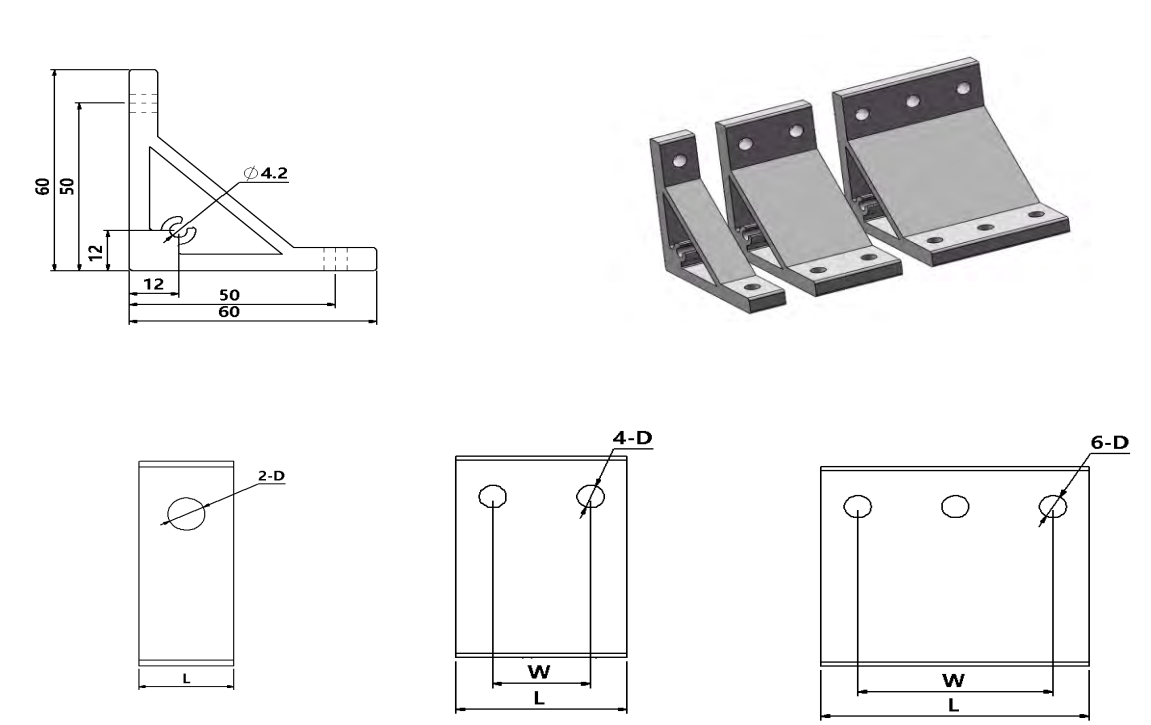

规格参数Specification

Series	Item	L	W	D
20 Profile series	TY-20-50-6-14 A bracket	14	\	5.5
20 Profile series	TY-20-50-6-34 A bracket	34	20	5.5
20 Profile series	TY-20-50-6-54 A bracket	54	40	5.5
30 Profile series	TY-30-50-6-20 A bracket	20	\	6.5
30 Profile series	TY-30-50-6-50 A bracket	50	30	6.5
30 Profile series	TY-30-50-6-80 A bracket	80	60	6.5
40 Profile series	TY-40-50-6-30 A bracket	30	\	6.5
40 Profile series	TY-40-50-6-70 A bracket	70	40	6.5
40 Profile series	TY-40-50-6-110 A bracket	110	80	6.5
45 Profile series	TY-45-50-6-35 A bracket	35	\	8.5
45 Profile series	TY-45-50-6-80 A bracket	80	45	8.5
50/60 Profile series	TY-50-50-6-40 A bracket	40	\	8.5
50/60 Profile series	TY-50-50-6-90 A bracket	90	50	8.5


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件

Profile universal accessories

挤压角码Bracket

Type	Material	Finish
Bracket	6063	Anodize

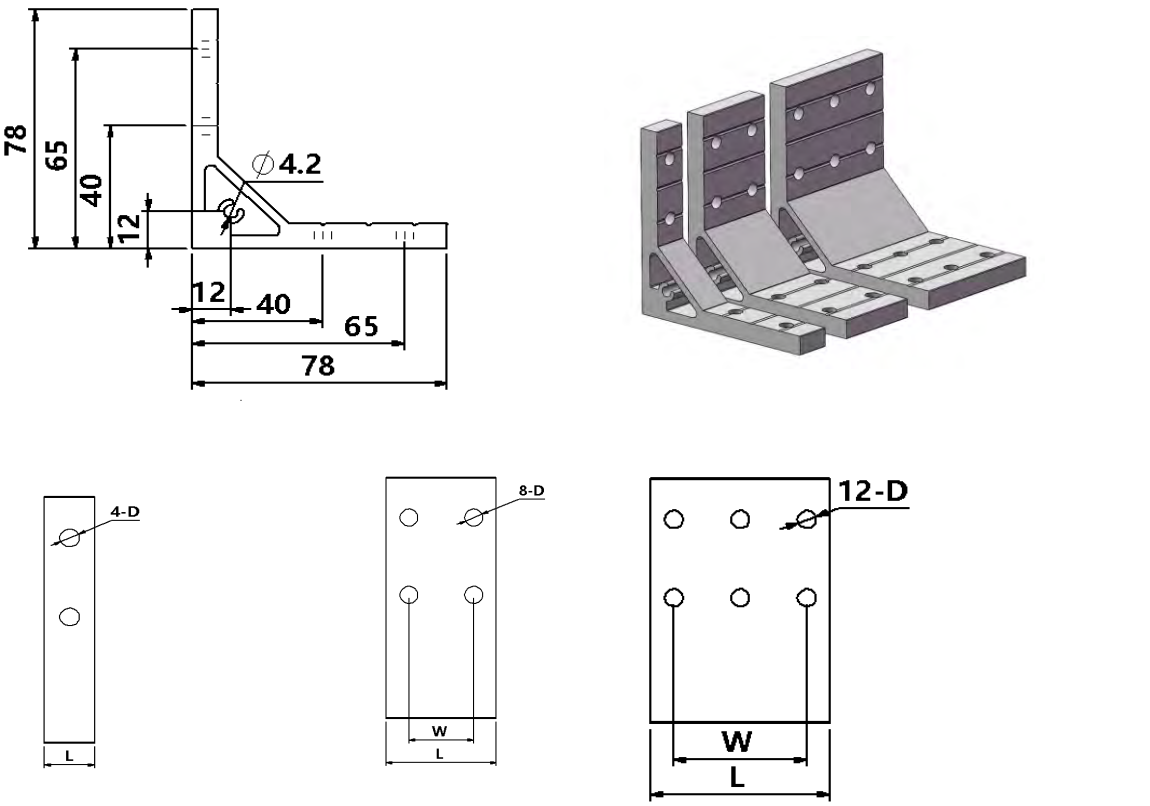

规格参数 Specification

Series	Item	L	W	D
20 Profile series	TY-20-7878-14 A bracket	14	\	5.5
20 Profile series	TY-20-7878-34 A bracket	34	20	5.5
20 Profile series	TY-20-7878-54 A bracket	54	40	5.5
30 Profile series	TY-30-7878-20 A bracket	20	\	6.5
30 Profile series	TY-30-7878-50 A bracket	50	30	6.5
30 Profile series	TY-30-7878-80 A bracket	80	60	6.5
40 Profile series	TY-40-7878-30 A bracket	30	\	6.5
40 Profile series	TY-40-7878-70 A bracket	70	40	6.5
40 Profile series	TY-40-7878-110 A bracket	110	80	6.5
45 Profile series	TY-45-7878-35 A bracket	35	\	8.5
45 Profile series	TY-45-7878-80 A bracket	80	45	8.5
50/60 Profile series	TY-50-7878-40 A bracket	40	\	8.5
50/60 Profile series	TY-50-7878-90 A bracket	90	50	8.5

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


型材通用配件

Profile universal accessories

角码Bracket

挤压角码Bracket

Type	Material	Finish
Bracket	6063	Anodize

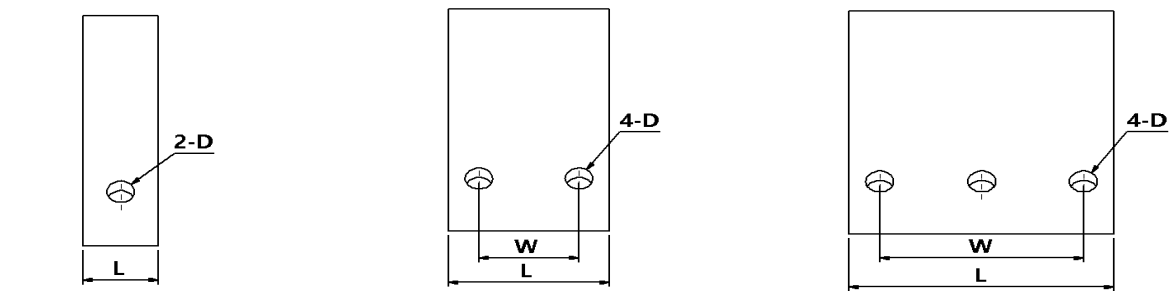

规格参数Specification

Series	Item	L	W	D
20Profile series	TY-20-15-45 degree A bracket	15	\	5.5
20Profile series	TY-20-32-45 degree A bracket	32	20	5.5
20Profile series	TY-20-52-45 degree A bracket	52	40	5.5
30Profile series	TY-20-22-45 degree A bracket	22	\	6.5
30Profile series	TY-20-52-45 degree A bracket	52	30	6.5
30Profile series	TY-20-82-45 degree A bracket	82	60	6.5
40Profile series	TY-20-32-45 degree A bracket	32	\	8.5
40Profile series	TY-20-72-45 degree A bracket	72	40	8.5
40Profile series	TY-20-112-45 degree A bracket	112	80	8.5
45Profile series	TY-20-42-45 degree A bracket	42	\	8.5
45Profile series	TY-20-82-45 degree A bracket	82	45	8.5
50/60Profile series	TY-20-42-45 degree A bracket	42	\	8.5
50/60Profile series	TY-20-92-45 degree A bracket	92	50	8.5



*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件

Profile universal accessories

挤压角码Bracket

Type	Material	Finish
Bracket	6063	Anodize

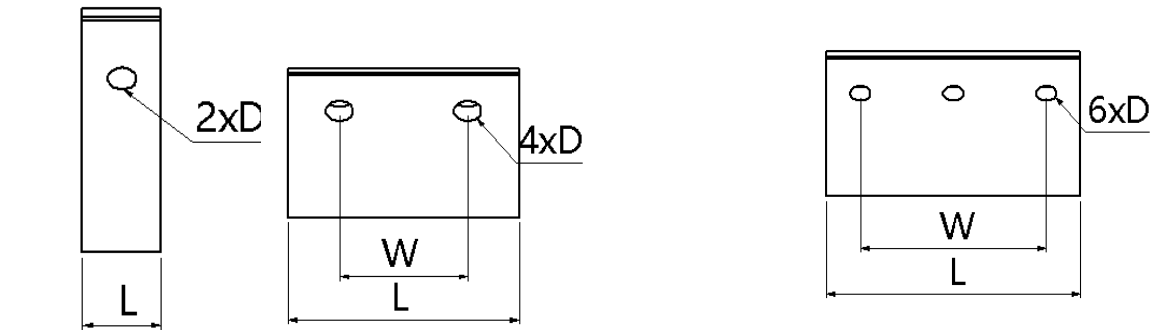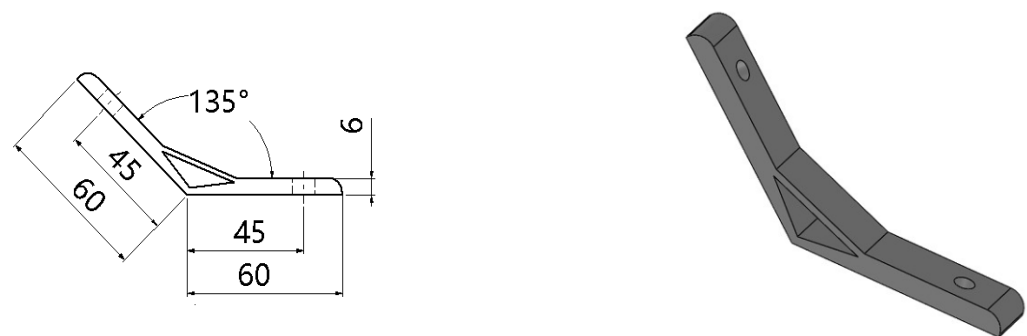

规格参数Specification

Series	Item	L	W	D
20Profile series	TY-20-15-135 degree A bracket	15	\	5.5
20Profile series	TY-20-32-135 degree A bracket	32	20	5.5
20Profile series	TY-20-52-135 degree A bracket	52	40	5.5
30Profile series	TY-20-22-135 degree A bracket	22	\	6.5
30Profile series	TY-20-52-135 degree A bracket	52	30	6.5
30Profile series	TY-20-82-135 degree A bracket	82	60	6.5
40Profile series	TY-20-32-135 degree A bracket	32	\	6.5
40Profile series	TY-20-72-135 degree A bracket	72	40	6.5
40Profile series	TY-20-112-135 degree A bracket	112	80	6.5
45Profile series	TY-20-42-135 degree A bracket	42	\	8.5
45Profile series	TY-20-82-135 degree A bracket	82	45	8.5
50/60Profile series	TY-20-42-135 degree A bracket	42	\	8.5
50/60Profile series	TY-20-92-135 degree A bracket	92	50	8.5

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件

Profile universal accessories


合页Hinge

圆形拉手Round handle

Code	Type	Material	Finish
TY-AB5-AL12	AB5	Aluminium alloy	Sandblasted bright silver
TY-AB5-AL12	AB5	Aluminium alloy	Sandblasted bright silver

Feature

- The handle can be folded at 90 degrees, and it will not interfere after being knocked down
- There is a folding fastener function when the handle is folded
- The cross-sectional shape of the handle adopts a round shape that is easy to grip

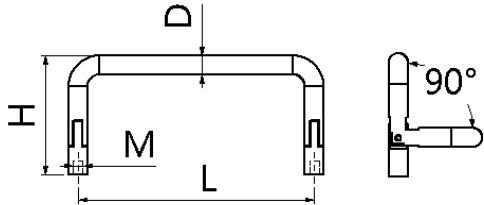

订货型号: TY-AA1-SUS02-72

Item		
Code	L	W
TY-AA1-SUS02	72	8
TY-AA1-CS01	80	8

规格参数Specification

Code	Type	L	D	H	M
TY-AA1-SUS02 TY-AA1-CS01	AA1	72	8	49	5
		80	8	49	5
		90	8	49	5
		100	8	49	5
		120	8	49	5


圆形拉手Round handle

Code	Type	Material	Finish
TY-AA2-SUS02	AA1	stainless steel	Polishing
TY-AA2-CS01	AA1	carbon steel	chromeplate



订货型号: TY-AA2-SUS02-60

Item		
Code	L	W
TY-AA2-SUS02	60	6
TY-AA1-CS01	70	6

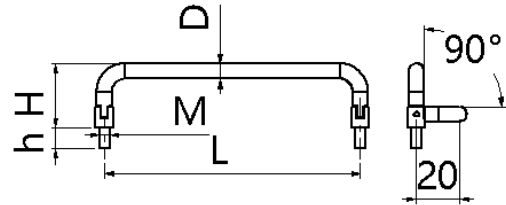

规格参数SPecification

Code	Item	L	D	H	h	M
TY-AA2-SUS02 TY-AA2-CS01	AA2	60	6	25	8	4
		70	6	25	8	4
		84	6	25	8	4
		90	6	25	8	4
		100	6	25	8	4
		120	6	25	8	4


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件

Profile universal accessories

圆形拉手Round handle

Code	Type	Material	Finish
TY-AA3-SUS04	AA3	stainless steel	polishing
TY-AA3-CS01	AA3	Carbon steel	chromeplate

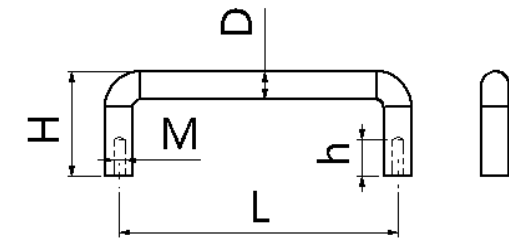

订货型号: TY-AA3-SUS04-80



Item		
Code	L	W
TY-AA3-SUS04	80	10
TY-AA3-CS01	100	10

规格参数Specification

Code	Type	L	D	H	h	M
TY-AA3-SUS04 TY-AA3-CS01	AA3	80	10	37	8	5
		100	10	37	8	5
		110	10	37	8	5
		120	10	37	8	5
		125	10	37	8	5
		160	10	37	8	5
		200	10	37	8	5

圆形拉手Round handle

Code	Type	Material	Finish
TY-AA4-SUS04	AA4	stainless steel	Polishing
TY-AA4-CS01	AA4	Carbon steel	chromeplate

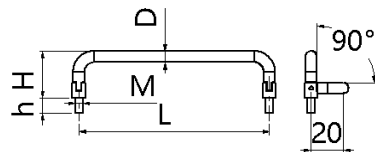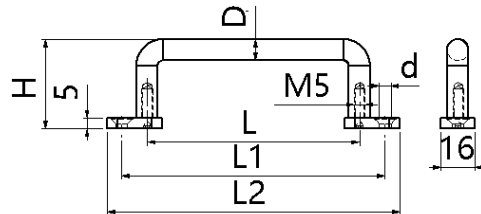

订货型号: TY-AA4-SUS04-60

Item		
Code	L	W
TY-AA4-SUS04	80	10
TY-AA4-CS01	100	10

规格参数Specification

Code	Item	L	L1	L2	D	d	H
TY-AA4-SUS04 TY-AA4-CS01	AA4	90	104	118	10	5.4	42
		100	124	138	10	5.4	42
		110	134	148	10	5.4	42
		120	144	158	10	5.4	42
		125	149	163	10	5.4	42
		160	184	198	10	5.4	42

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


型材通用配件

Profile universal accessories

拉手Handle

角形拉手Angle handle

Code	Type	Material	Finish
TY-AA5-SUS04	Aa5	stainless steel	Polishing
TY-AA5-CS01	Aa5	Carbon steel	chromeplate
TY-AA5-AL02	Aa5	Aluminum alloy	polishing
TY-AA5-AL06	Aa5	Aluminum alloy	colorless oxidation

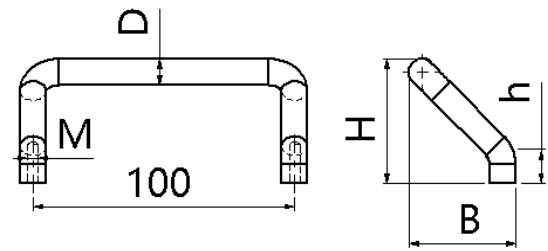

订货型号: TY-AA5-SUS04-48


Item		
Code	L	W
TY-AA5-SUS04	48	10
TY-AA5-CS01	66	10

规格参数Specification

Code		Type	D	H	h	M	B
TY-AA5-SUS04 TY-AA5-CS01 TY-AA5-AL02 TY-AA5-AL06	AA5	48	10	47	13	5	40
	AA5	66	10	47	13	5	40
	AA5	88	10	47	13	5	40
	AA5	100	10	47	13	5	40
	AA5	110	10	47	13	5	40

角形拉手Angle handle

Code	Type	Material	Finish
TY-AA6-SUS04	Aa6	Carbon steel	polishing
TY-AA6-CS01	Aa6	Carbon steel	chromeplate

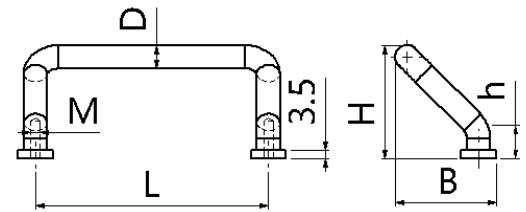

订货型号: TY-AA6-SUS04-48

Item		
Code	L	W
TY-AA6-SUS04	48	10
TY-AA6-CS01	66	10

规格参数

Code		Type	D	H	h	M	B
TY-AA6-SUS04 TY-AA6-CS01	AA6	48	10	47	13	5	40
	AA6	66	10	47	13	5	40
	AA6	88	10	47	13	5	40
	AA6	100	10	47	13	5	40
	AA6	110	10	47	13	5	40
	AA6	120	10	47	13	5	40


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件

Profile universal accessories

圆形拉手 Round handle

Code	Type	Material	Finish
TY-AA7-AL02	AA7	Aluminium alloy	polishing
TY-AA7-AL03	AA7	Aluminium alloy	barrel polishing
TY-AA7-AL07	AA7	Aluminium alloy	Polished Bright Silver

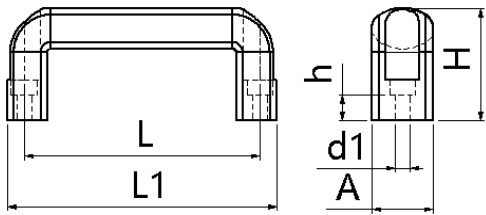

订货型号: TY-AA3-SUS04-80


Item		
Code	L	W
TY-AA7-AL02	100	26
TY-AA7-AL03	116	26

规格参数Specification

Code	Type	L	L1	A	H	h	d1
TY-AA7-AL02 TY-AA7-AL03 TY-AA7-AL07	AA7	100	114	26	47	10.5	11
	AA7	116	130	26	53	10.5	11
	AA7	132	146	26	55	10.5	11
	AA7	150	164	26	67	10.5	11
	AA7	164	178	26	57	10.5	11
	AA7	196	210	26	57	10.5	11

圆形拉手 Round handle

Code	Type	Material	Finish
TY-AA8-AL03	Aa8	Aluminum alloy	polishing
TY-AA8-AL02	Aa8	Aluminum alloy	barrel polishing

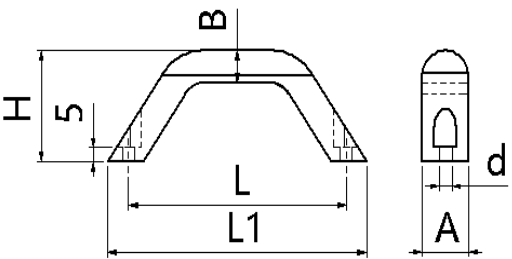

订货型号: TY-AA8-AL02-90

Item			
Code	L	A	B
TY-AA8-AL02	90	19	12
TY-AA8-AL03	93.5	20	13

规格参数Specification

Code	Type	L	L1	A	B	H	d
TY-AA8-AL02 TY-AA8-AL03	AA8	90	107	19	12	41	5.3
		93.5	112	20	13	44	6.5
		130	149	26	17	57	8.5

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


型材通用配件

Profile universal accessories

拉手Handles

不锈钢暗式拉手Stainless steel concealed handle

Code	Type	Material	Finish
TY-AA22-SUS04	AA22	stainless steel	mirror polishing
TY-AA23-SUS09	AA23	stainless steel	wire drawing

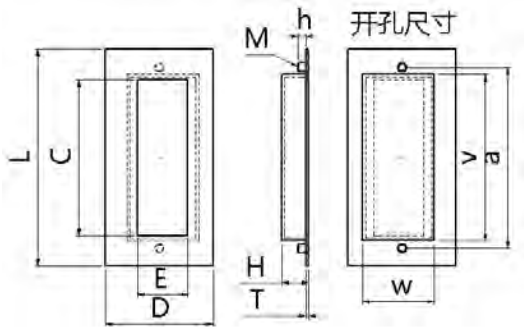

订货型号: TY-AA22-SUS04-90


Type			
Code	L	C	D
TY-AA22-SUS04	90	58	60
TY-AA23-SUS09	120	86	60

规格参数Specification

Code	Type	L	C	D	E	H	h	T	M	Hole size		
										a	w	v
TY-AA22-SUS04 TY-AA23-SUS09	AA22 AA23	90	58	60	28	15	10	1.8	4	74	45	61
		120	86	60	28	15	10	1.8	4	100	45	91

不锈钢斜拉手Stainless steel cable-stayed handle

Code	Type	Material	Finish
TY-AA6-SUS04	Aa6	stainless steel	polishing
TY-AA6-CS01	Aa6	Carbon steel	chromeplate

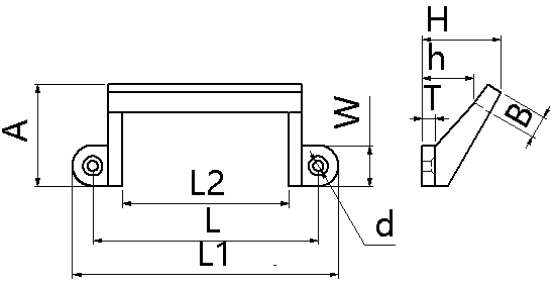

订货型号: TY-AA24-SUS02-80

Type			
Code	L	L1	L2
TY-AA24-SUS02	80	98	54
	100	118	74

规格参数Specification

Code	Type	L	L1	L2	A	B	H	h	D	T	W
TY-AA24-SUS02	AA24	80	98	54	45	10	35	23	4.5	6	18
	AA24	100	118	74	45	10	35	23	4.5	6	18
	AA24	150	168	124	45	10	35	23	4.5	6	18


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件

Profile universal accessories

电木拉手Bakelite handle

Code	Type	Material	Color
TY-AA26-PF05	Aa26	Bakelite	Black

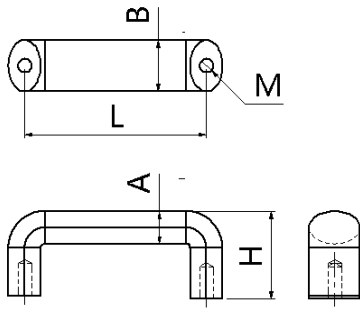

订货型号: TY-AA26-PF05-90


Type			
Code	L	H	A
TY-AA26-PF05	90	43	16
	120	43	16

规格参数Specification

Code		Type	L	H	A	B	M
TY-AA26-PF05		AA26	90	43	16	25	8
		AA26	120	43	16	25	8
		AA26	180	43	16	25	8

尼龙拉手 Nylon handle

Code	Type	Material	Color
TY-AA27-PA05	Aa27	Nylon	Black

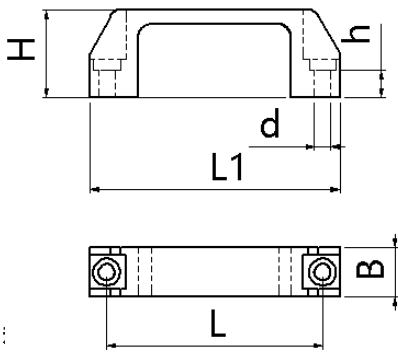

订货型号: TY-AA8-AL02-90

Item			
Code	L	H	B
TY-AA27-PA05	90	36	20

规格参数Specification

Code	Type	L1	B	H	h	d
TY-AA27-PA05-90 TY-AA27-PA05-120 TY-AA27-PA05-180	AA27	88	20	36	11.3	6.5
		120	26	40	15.3	6.5
		175	28	50	25.3	6.5

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


型材通用配件

Profile universal accessories

脚杯Foot bracket

尼龙固定调节系列Nylon fixed adjustable foot series

底盘材质：增强尼龙，（高强度，高韧性，哑光磨砂表面）
Chassis material: reinforced nylon, (high strength, high toughness, matte frosted surface)

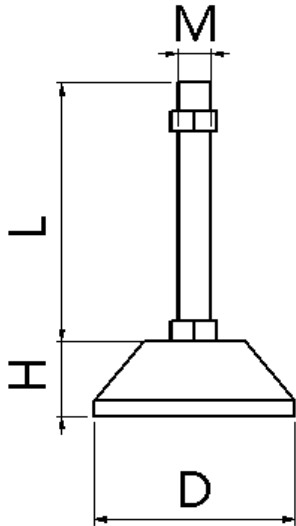


订货型号：TY-D60-NLGD-M10-L100

型材通用配件

Profile universal accessories

尼龙万向调节系列Nylon swivel adjustment foot series

底盘材质：增强尼龙，（高强度，高韧性，哑光磨砂表面）
Chassis material: reinforced nylon, (high strength, high toughness, matte frosted surface)

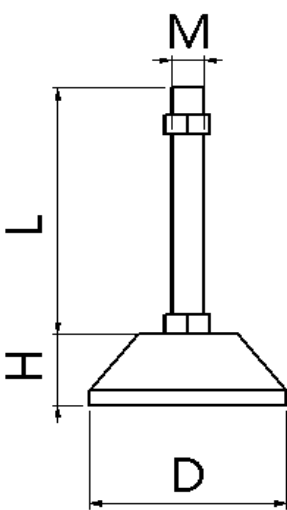

订货型号：TY-D60-NLWX-M10-L100

规格参数Specification

Chassis diameter	Screw diameter	Screw length	Chassis Height	Max. load
D	M	L	H	KG
Ø40	M8 M10 M12	50 80 100 120	22	300
Ø50	M8 M10 M12 M14 M16	50 80 100 120 150	22	350
Ø60	M10 M12 M14 M16 M18 M20	50 80 100 120 150	27	400
Ø80	M12 M14 M16 M18 M20	50 80 100 120 150	30	800
Ø100	M14 M16 M18 M20 M24 M30	50 80 100 120 150	35	800

规格参数Specification

Chassis diameter	Screw diameter	Screw length	Chassis Height	Max. load
D	M	L	H	KG
Ø60	M10 M12 M14 M16 M18 M20	50 80 100 120 150	27	400
Ø80	M12 M14 M16 M18 M20	50 80 100 120 150	30	800
Ø100	M14 M16 M18 M20 M24 M30	50 80 100 120 150	35	800

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


型材通用配件

Profile universal accessories

脚杯Foot bracket

普通平底调节系列General flat base adjustment foot series

底盘材质：高强度钢材，底部高分子硅胶，具有高回弹性、吸震性、防滑、耐磨、防腐蚀等性能
Chassis material: high-strength steel, polymer silica gel at the bottom, with high resilience, shock absorption, non-slip, wear-resistant and anti-corrosion properties



订货型号：TY-D60-PP-M10-L100

规格参数Specification

Chassis diameter	Screw diameter	Screw length	Chassis Height	Max. load
D	M	L	H	KG
Ø40	M8 M10 M12	50 80 100 120	15	300
Ø50	M8 M10 M12 M14 M16	50 80 100 120 150	18	400
Ø60	M10 M12 M14 M16 M18 M20	50 80 100 120 150	19	500
Ø80	M12 M14 M16 M18 M20	50 80 100 120 150	24	800
Ø100	M14 M16 M18 M20 M24 M30	50 80 100 120 150	28	1000


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件

Profile universal accessories

锻造碳钢固定调节系列 Forged carbon steel fixed adjustment foot series

底盘材质：锻造碳钢，底座粘有弹性聚氨酯（TPU），具有高回弹性、吸震性、防滑、耐磨、防腐蚀等性能
Chassis material: forged carbon steel, the base is glued with elastic polyurethane (TPU), with high resilience, shock absorption, non-slip, wear-resistant and anti-corrosion properties

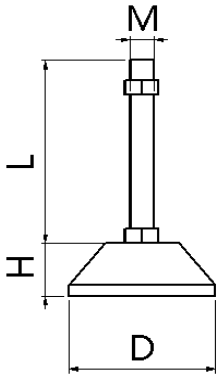

订货型号：TY-D60-DZGD-M14-L100

规格参数Specification

Chassis diameter	Screw diameter	Screw length	Chassis Height	Max. load
D	M	L	H	KG
Ø50	M12	50 100 150	15.5	700
Ø60	M14	50 100 150	15.5	1000
Ø70	M16 M20 M24	50 100 150	20.5	1500
Ø80	M16 M20 M24	50 100 150	22.5	2300
Ø100	M16 M20 M24	50 100 150	25.5	3000


*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件 Profile universal accessories

脚杯Foot bracket

锻造碳钢万向调节系列 Forged carbon steel swivel adjustment foot series

底盘材质：锻造碳钢，底座粘有弹性聚氨酯（TPU），螺杆可360度旋转，具有高回弹性、吸震性、防滑、耐磨、防腐蚀等性能
Chassis material: forged carbon steel, the base is glued with elastic polyurethane (TPU), the screw can rotate 360 degrees, with high resilience, shock absorption, non-slip, wear-resistant and anti-corrosion properties

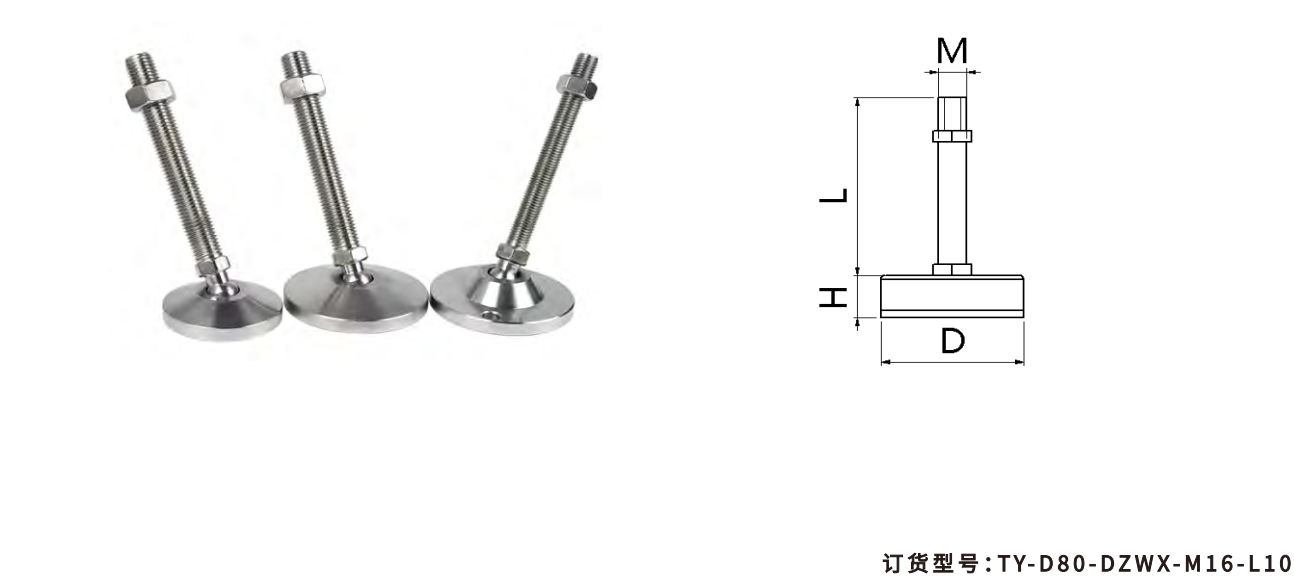

订货型号：TY-D80-DZWX-M16-L100

规格参数Specification


Chassis diameter	Screw diameter	Screw length	Chassis Height	Max. load
D	M	L	H	KG
Ø80	M16 M20 M24	50 100 150	22.5	2300
Ø100	M16 M20 M24	50 100 150	22.5	3000

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件 Profile universal accessories

碳钢喇叭调节系列Carbon steel horn adjustment foot series

底盘材质：底部由3mm厚金属铁板制成
Chassis material: the bottom is made of 3mm thick iron plate

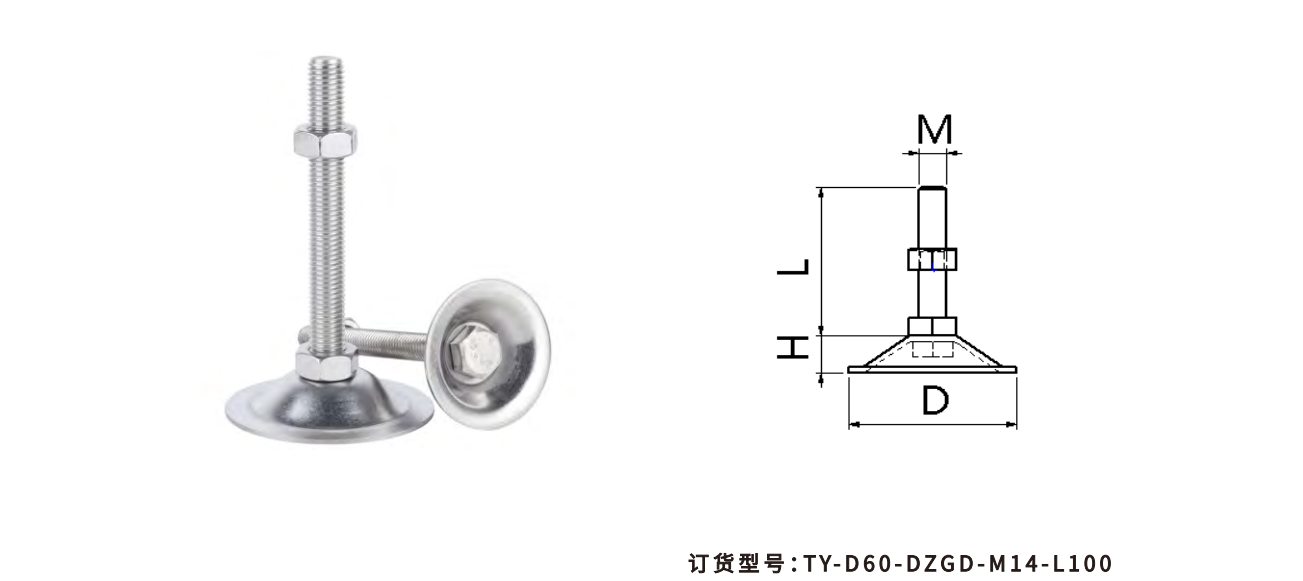

订货型号：TY-D60-DZGD-M14-L100

规格参数Specification

Chassis diameter	Screw diameter	Screw length	Chassis Height	Max. load
D	M	L	H	KG
Ø50	M10	50 100 150	11	300
Ø60	M12	50 100 150	12	400
Ø70	M14	50 100 150	13	600
Ø80	M16	50 100 150	15	700
Ø100	M20	50 100 150	18	900

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件


Profile universal accessories

脚轮Castor

轻型—单滚珠轴承黑色聚氨酯 (PU) 轮 Light- Single ball bearing black polyurethane (PU) castor

Bracket			
Type	Material	Finish	Braking mode
Flat activity	Q235A	Black E-coat	A-Double brake
Flat activity	Q235A	Black E-coat	B-No

Wheel part		
Material	Color	Bearing
PU	Black	Single bearing

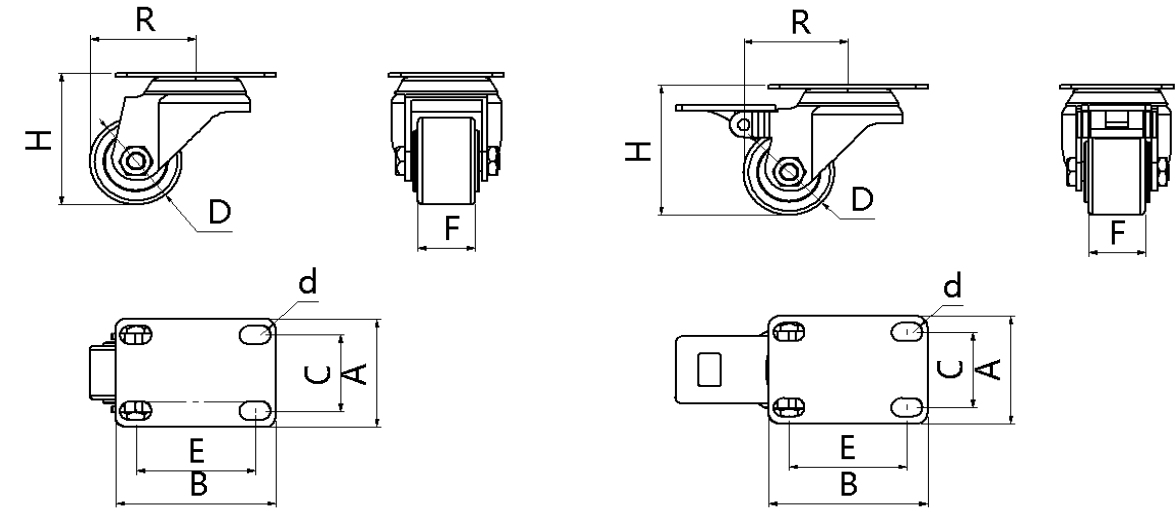

规格参数Specification

Chassis diameter/Item	H	F	A	B	C	D	d	E	R	Max. load(Kg)
TY-2 inch swivel PU wheel	72	25	51	70	35	50	8.2	52	50	45
TY-2 inch swivel PU wheel with brake	72	25	51	70	35	50	8.2	52	50	45

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


型材通用配件

Profile universal accessories

轻型—单滚珠轴承黑色聚氨酯 (PU) 轮 Light- Single ball bearing black polyurethane (PU) castor

Bracket			
Type	Material	Finish	Braking mode
Screw activity	Q235A	Black E-coat	A-Double brake
Screw activity	Q235A	Black E-coat	B-NO

Wheel part		
Material	Color	Bearing
PU	Black	Single bearing

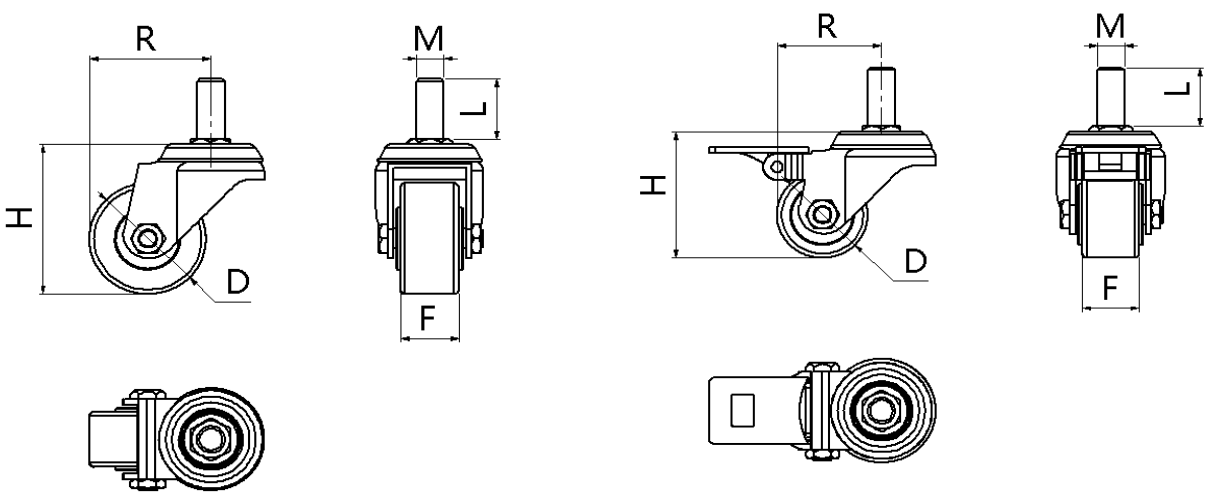

规格参数Specification

Chassis diameter/Item	H	F	L	M	R	D	Max. load (Kg)
TY-2 inch swivel screw PU wheel break	72	25	25	10	50	40	45
TY- 2 inch swivel screw PU wheel with break	72	25	25	10	50	40	45

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件



Profile universal accessories

脚轮Castor

轻型—单滚珠轴承咖啡色人造橡胶 (TPR) 轮 Light- Single ball bearing brown synthetic rubber (TPR) castor

Bracket			
Type	Material	Finish	Breaking mode
Flat activity	Q235A	Black E-coat	A-Double brake
Flat activity	Q235A	Black E-coat	B-NO

Wheel part		
Material	Color	Bearing
TPR	Brown	Single bearing

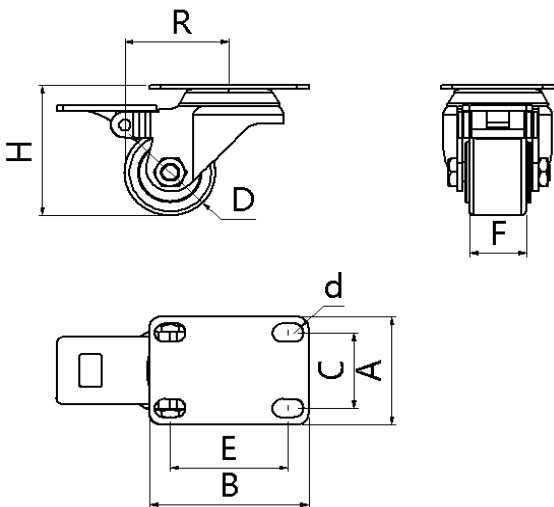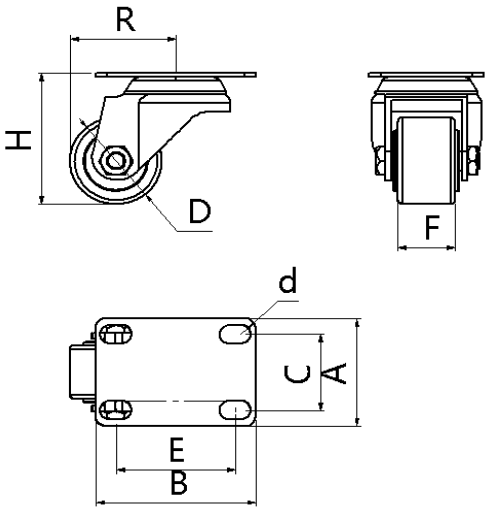

规格参数Specification

Chassis diameter/Item	H	F	A	B	C	D	d	E	R	Max. load(Kg)
TY-2 inch swivel TPR wheel	72	25	51	70	35	50	8.2	52	50	40
TY- 2 inch swivel TPR wheel with brake	72	25	51	70	35	50	8.2	52	50	40
TY- 3 inch swivel TPR wheel	98	25	51	70	45	75	8.2	73	71	60
TY-3 3 inch swivel TPR wheel with brake	98	25	51	70	45	75	8.2	73	71	60

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!



型材通用配件

Profile universal accessories

轻型—单滚珠轴承咖啡色人造橡胶 (TPR) 轮 Light- Single ball bearing brown synthetic rubber (TPR) castor

Bracket			
Type	Material	Finish	Braking mode
Screw activity	Q235A	Black E-coat	A-Double brake
Screw activity	Q235A	Black E-coat	B-NO

Wheel part		
Material	Color	Bearing
TRP	Brown	Single bearing

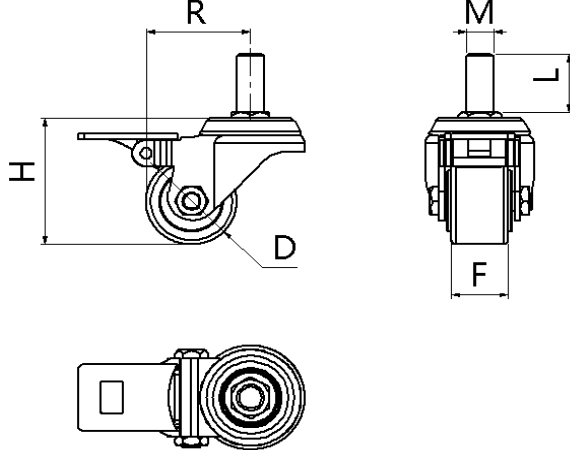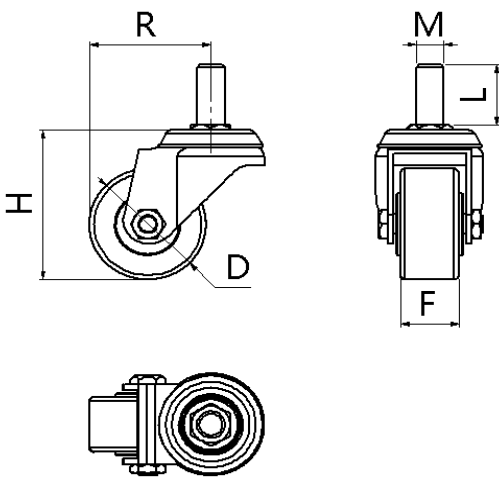

规格参数 Specification

Chassis diameter/Item	H	F	L	M	R	D	Max. load (Kg)
TY-2 inch swivel screw TPR wheel	72	25	25	10	50	40	45
TY-2 inch swivel screw TPR wheel with brake	72	25	25	10	50	40	45
TY-3inch swivel screw TPR wheel	98	25	25	10	71	75	60
TY-3inch swivel screw TPR wheel with brake	98	25	25	10	71	75	60

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件



Profile universal accessories

脚轮Castor

重载型、万向脚轮 Heavy load type, swivel castor

Bracket			
Type	Material	Finish	Breaking mode
Flat activity	Q235A	Black E-coat	A-Single brake
Flat activity	Q235A	Black E-coat	B-NO

Wheel part		
Material	Color	Bearing
Nlyon	Black	Double bearing

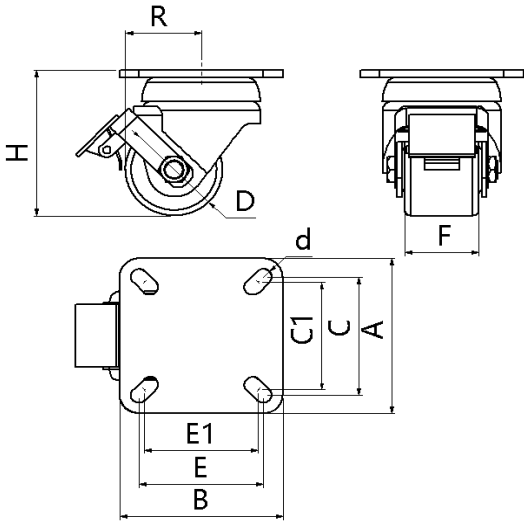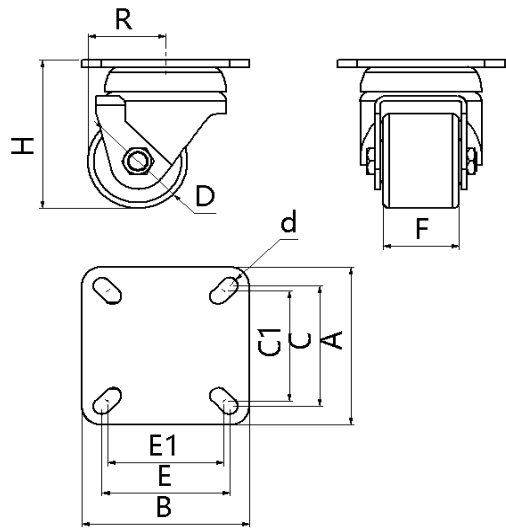

规格参数Specification

Chassis diameter/Item	H	F	A	B	C	C1	D	d	E	E1	R	最大承载 (Kg)
TY-2 inch swivel wheel	79	38	84	84	64	55	50	8.5	64	55	39	300
TY-2 inch swivel wheel with brake	79	38	84	84	64	55	50	8.5	64	55	39	300
TY-2.5inch swivel wheel	95	50	100	100	80	75	65	11	80	75	52.5	500
TY-2.5inch swivel wheel with brake	95	50	100	100	80	75	65	11	80	75	52.5	500
TY-3 inch swivel wheel	105	50	100	100	80	75	75	11	80	75	55	600
TY-3 inch swivel wheel with brake	105	50	100	100	80	75	75	11	80	75	55	600

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


型材通用配件

Profile universal accessories

重型万向脚杯轮Heavy load swivel foot bracket and castor

Bracket			
Type	材质	Finish	Braking mode
Screw activity	Q235A	Zinc-plated	NO

Wheel pat		
Material	Color	Bearing
PVC	Claret	Single bearing

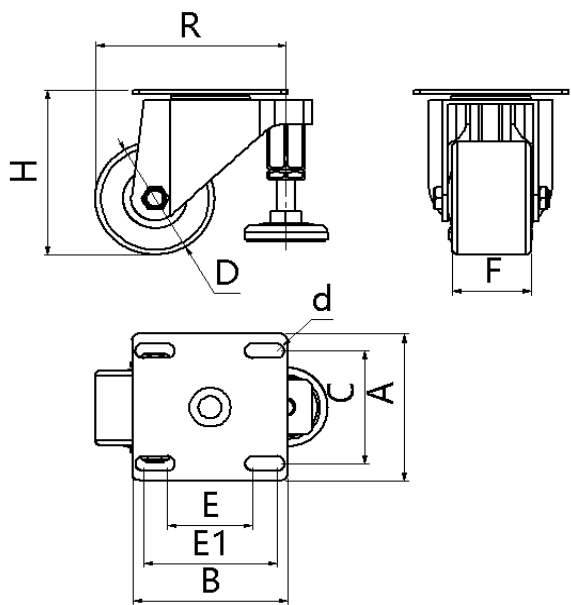

规格参数Specification

Chassis diameter/Item	H	F	A	B	C	D	d	E	R	最大承载 (Kg)
TY-2.5 inch swivel wheel with foot bracket A	91	32	63	95	45	63	8.5	43	85	180
TY-3 inch swivel wheel with foot bracket A	103	32	63	95	45	75	8.5	43	110	230

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!

型材通用配件


Profile universal accessories

脚轮Csator

重载型、万向脚轮Heavy load foot bracket and castor

Bracket			
Type	Material	Finish	Breaking mode
Flat activity	Q235A	Black E-coat	A-Single break
Flat activity	Q235A	Black E-coat	B-NO

Wheel part		
Material	Color	Bearing
Nlyon	Black	Double bearing

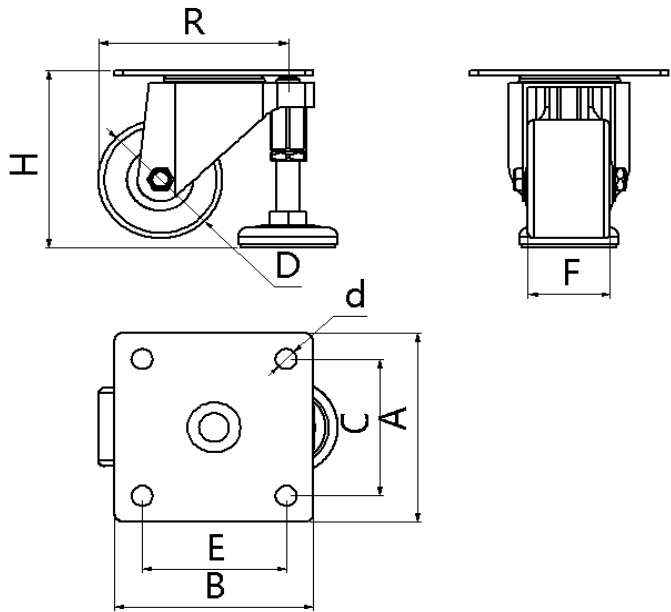

规格参数Specification

Chassis diameter/Item	H	F	A	B	C	D	d	E	R	Max. load (Kg)
TY-2.5inch swivel wheel with foot bracket B	95	43	120	120	95	65	10.5	95	62.5	200
TY-3 inch swivel wheel with foot bracket B	102	50	120	120	95	75	10.5	95	67.5	250

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!


型材通用配件

Profile universal accessories

福马轮Foma castor

Bracket			
Type	Marterial	Finish	Breaking mode
Screw activity	Q235A	Zinc-plated	NO

Wheel part		
Material	Color	Bearing
PVC	Claret	Single bearing

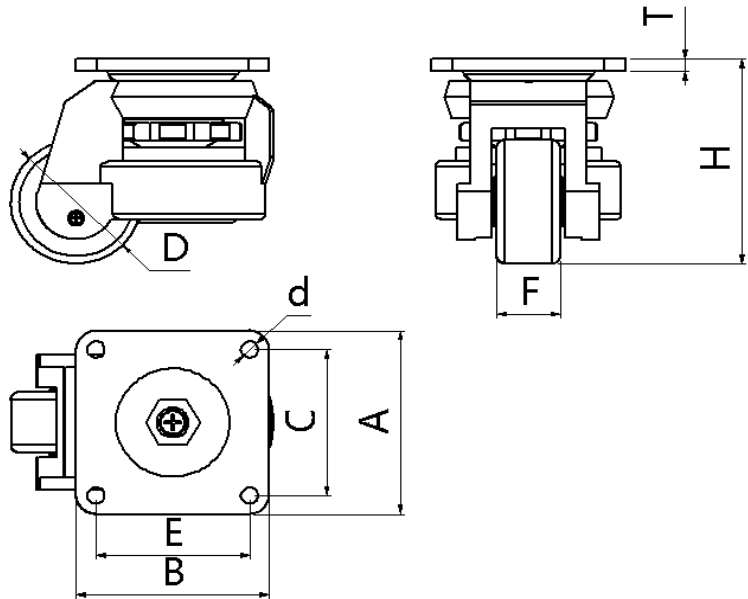

规格参数Specification

Chassis diameter/Item	H	F	A	B	C	E	D	d	T	Max. load (Kg)
TY-GD-40F foma castor	75	19.2	55	55	42	42	40	7	3	50
TY-GD-60F foma castor	85	24	73	73	58	58	50	7	5	250
TY-GD-80F foma castor	110	30.7	90	90	70	70	62	9	5	500
TY-GD-100F foma castor	120	32	95	95	70	70	75	11	5	750
TY-GD-120F foma castor	120	32	95	95	70	70	75	16	6	1000

*图纸尺寸为参考资料，具体以实物尺寸为准！
Drawing size is reference material,Subject to the actual size!